



SECTION 8

Construction

Standard Highway Sign Designs for Texas

2026 Edition | September 2026



Drawings may not be to scale. Do not photocopy for manufacturing.

(This page left intentionally blank)

CONSTRUCTION



CW1-1L
Horizontal Alignment -
Turn



CW1-1R
Horizontal Alignment -
Turn



CW1-2L
Horizontal Alignment -
Curve



CW1-2R
Horizontal Alignment -
Curve



CW1-3L
Horizontal Alignment -
Reverse Turn



CW1-3R
Horizontal Alignment -
Reverse Turn



CW1-4L
Horizontal Alignment -
Reverse Curve



CW1-4R
Horizontal Alignment -
Reverse Curve



CW1-4bL
Reverse Curve
(2 Lanes)



CW1-4bR
Reverse Curve
(2 Lanes)



CW1-4cL
Reverse Curve
(3 Lanes)



CW1-4cR
Reverse Curve
(3 Lanes)



CW1-6L
Large Arrow
(1-Direction)



CW1-6R
Large Arrow
(1-Direction)



CW1-8L
Chevron Alignment



CW1-8R
Chevron Alignment



CW3-1
Stop Ahead



CW3-2
Yield Ahead



CW3-3
Signal Ahead



CW3-4
BE PREPARED TO
STOP



CW3-5
Reduced Speed Limit
Ahead



CW3-5a
XX MPH SPEED
ZONE AHEAD



CW4-1L
Merge



CW4-1R
Merge



CW4-1aTL
THRU TRAFFIC
MERGE LEFT



CW4-1aTR
THRU TRAFFIC
MERGE RIGHT



CW4-2L
Lane Ends



CW4-2R
Lane Ends



CW4-3L
Added Lane

CONSTRUCTION



CW4-3R
Added Lane



CW4-5L
Entering Roadway
Merge



CW4-5R
Entering Roadway
Merge



CW4-5aP
NO MERGE AREA
(Plaque)



CW4-6L
Entering Roadway
Added Lane



CW4-6R
Entering Roadway
Added Lane



CW5-1
ROAD NARROWS



CW5-2
NARROW BRIDGE



CW5-2a
NARROW
UNDERPASS



CW5-3
ONE LANE
BRIDGE



CW5-3a
ONE LANE
UNDERPASS



CW5-4
RAMP NARROWS



CW6-1
Divided Highway



CW6-2
Divided Highway
Ends



CW6-3
Two-Way Traffic



CW6-4
Narrow Two-Way
Traffic



CW7-1
Hill



CW7-3aP
NEXT XX MILES
(Plaque)



CW8-1
BUMP



CW8-2
DIP



CW8-3
PAVEMENT ENDS



CW8-4
SOFT SHOULDER



CW8-5
Slippery When Wet



CW8-6
TRUCK CROSSING



CW8-7
LOOSE GRAVEL



CW8-8
ROUGH ROAD



CW8-9
LOW SHOULDER



CW8-11
UNEVEN LANES



CW8-12
NO CENTER LINE



CW8-13aT
BRIDGE MAY ICE IN
COLD WEATHER

CONSTRUCTION



CW8-14
FALLEN ROCKS




CW8-15
BRICK
PAVEMENT



CW8-15
GROOVED
PAVEMENT



CW8-15
TEXTURED
PAVEMENT



CW8-15aP
Motorcycle
(Plaque)



CW8-16
METAL BRIDGE
DECK



CW8-17L
Shoulder Drop Off



CW8-17R
Shoulder Drop Off



CW8-17P
SHOULDER
DROP-OFF
(Plaque)



CW8-18
ROAD MAY FLOOD



CW8-23
NO SHOULDER



CW8-24
STEEL PLATE
AHEAD



CW8-25
SHOULDER ENDS



CW9-1L
LEFT LANE ENDS



CW9-1R
RIGHT LANE ENDS



CW9-2a
MERGE HERE TAKE
TURNS



CW9-3
Interior Lane Shift
Ahead



CW9-5a
Bicycles Merging



CW11-10L
Truck



CW11-10R
Truck



CW12-1
Double Arrow



CW12-2
Clearance Advance



CW12-2PT
Low Clearance
(Plaque)



CW12-2a
Clearance Overhead



CW12-4T
LOW CLEARANCE X MILES
AHEAD



CW13-1P
Advisory Speed
(Plaque)



CW13-4P
ON RAMP (Plaque)



CW16-2P
[Distance Plaque] XX
FEET (2-Line Plaque)



CW16-2aP
[Distance Plaque] XX
FT (1-Line Plaque)

CONSTRUCTION



CW16-2aP
[Distance Plaque] XX
FT (1-Line Plaque)



CW16-2aP
[Distance Plaque] XX
FT (1-Line Plaque)



CW16-3P [1]
[Distance Plaque] XX
MILES
(2-Line Plaque)



CW16-3P [2]
[Distance Plaque] XX
MILES
(2-Line Plaque)



CW16-3P [3]
[Distance Plaque] XX
MILES
(2-Line Plaque)



CW16-3P [4]
[Distance Plaque] XX
MILES
(2-Line Plaque)



CW16-3aP [1]
[Distance Plaque] XX
MILES
(1-Line Plaque)



CW16-3aP [2]
[Distance Plaque] XX
MILES
(1-Line Plaque)



CW17-15T
WATCH FOR MUD
ON ROAD



CW19-3
FREEWAY ENDS



CW19-5
ALL TRAFFIC MUST
EXIT



CW20-1[D]
ROAD WORK



CW20-1b[D]
PATH WORK



CW20-2[D]
DETOUR



CW20-2a
Bike DETOUR



CW20ST-3[F]
STREET CLOSED



CW20-3[D]
ROAD CLOSED



CW20-3a[C]
PATH CLOSED



CW20-4[D]
ONE LANE ROAD



CW20-5TL
LEFT LANE
CLOSED



CW20-5TR
RIGHT LANE
CLOSED



CW20-5[C]L
LEFT LANE CLOSED
(with Distance)



CW20-5[D]R
RIGHT LANE CLOSED
(with Distance)



CW20-5[E]C
CENTER LANE
CLOSED
(with Distance)



CW20-5a[D]L
2 LANES CLOSED
(with Distance)



CW20-5a[D]R
2 LANES CLOSED
(with Distance)



CW20-5aTL
2 LEFT LANES
CLOSED



CW20-5aTR
2 RIGHT LANES
CLOSED



CW20-5b[D]
BIKE LANE CLOSED
(with Distance)



CW20-5cTL
LEFT LANE CLOSED

CONSTRUCTION



CW20-5cTR
RIGHT LANE CLOSED



CW20-5dT
CENTER LANE CLOSED



CW20-5eTL
2 LEFT LANES CLOSED



CW20-5eTR
2 RIGHT LANES CLOSED



CW20-7
FLAGGER



CW20-7a[D]
FLAGGER



CW20-8
SLOW
(On Stop/Slow Paddle)



CW20-8T
NARROW LANES
AHEAD



CW21-1
Workers



CW21-1bT
WORKERS AHEAD



CW21-1T
GIVE US A BRAKE
(with Symbol)




CW21-2[A]
FRESH OIL



CW21-2[B]
FRESH TAR



CW21-3[D]
ROAD MACHINERY

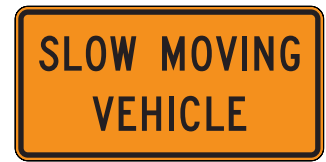

CW21-4
SLOW MOVING VEHICLE



CW21-5
SHOULDER WORK



CW21-5aL
SHOULDER CLOSED



CW21-5aR
SHOULDER CLOSED



CW21-5b[D]L
SHOULDER CLOSED
(with Distance)



CW21-5b[D]R
SHOULDER CLOSED
(with Distance)



CW21-6
SURVEY CREW



CW21-6T[D]
SURVEY CREW
(with Distance)



CW21-7[D]
UTILITY WORK
(with Distance)



CW21-8T
DRONES
OPERATING IN
AREA



CW21-9T
MOWERS AHEAD



CW21-10T
WORK CONVOY



CW21-10aT
WORK CONVOY

CONSTRUCTION



CW21-10bT
X VEHICLE CONVOY



CW21-10cT
X VEHICLE CONVOY



CW21-10dT
X VEHICLE CONVOY



CW21-17T
GUARDRAIL
DAMAGE AHEAD



CW21-18T
BRIDGE RAIL
DAMAGE AHEAD



CW22-1[D]
BLASTING ZONE
AHEAD



CW22-3
END BLASTING
ZONE



CW23-1
SLOW TRAFFIC AHEAD



CW23-1T
SHOULDER LANE
AHEAD



CW23-2
NEW TRAFFIC
PATTERN AHEAD



CW23-2T
BEGIN SHOULDER
LANE



CW23-3T
END SHOULDER
LANE



CW24-1L
Double Reverse
Curve (1-Lane)



CW24-1R
Double Reverse
Curve (1-Lane)



CW24-1aL
Double Reverse
Curve (2-Lanes)



CW24-1aR
Double Reverse
Curve (2-Lanes)



CW24-1bL
Double Reverse
Curve (3-Lanes)



CW24-1bR
Double Reverse
Curve (3-Lanes)



CW24-1cP
ALL LANES (Plaque)



CW25-1T
USE NEXT RAMP



CW26-1T
EXIT CLOSED



CW27-1T
TRUCKS ENTERING
ROADWAY




CW28-1T
POWER LINES
(with Arrow)



CW29-1T
INMATE WORK
PROGRAM



CW29-1PT
INMATE WORK
PROGRAM (Plaque)

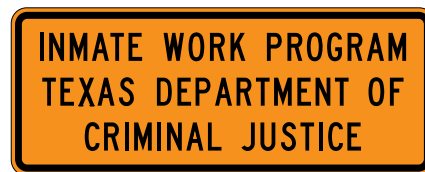

CW29-2T
INMATE WORK PROGRAM TEXAS
DEPARTMENT OF CRIMINAL JUSTICE

CONSTRUCTION



G20-1T
ROAD WORK NEXT
X MILES



G20-1aT L/R
ROAD WORK NEXT X MILES
(with Arrows)



G20-1bTL
ROAD WORK NEXT X MILES
(with Arrow)



G20-1bTR
ROAD WORK NEXT X MILES
(with Arrow)



G20-2
END ROAD WORK



G20-2bT
END WORK ZONE



G20-4
PILOT CAR
FOLLOW ME



G20-5T
BEGIN ROAD WORK
NEXT X MILES



G20-5aP
WORK ZONE
(Plaque)



G20-5bPT
WORK ZONE (Plaque)



G20-6T
CONTRACTOR



G20-7T
WORKING FOR YOU GIVE
US A BRAKE (with Symbol)



G20-9PT
BEGIN WORK ZONE
(Plaque)



G20-10T
STAY ALERT TALK OR TEXT
LATER (with Symbol)



E5-2
EXIT OPEN



E5-2a
EXIT CLOSED



E5-3
EXIT ONLY



E5-4aPT
Exit Number (Plaque)



E5-4aT
EXIT GORE
(with 45 Degree Arrow)



M4-8P
DETOUR (Plaque)



M4-8a
END DETOUR



M4-8bP
END (Plaque)

CONSTRUCTION



M4-8cPT
Street Name (Plaque)



M4-9L
DETOUR (Left-Arrow)



M4-9R
DETOUR (Right-Arrow)



M4-9S
DETOUR (Up-Arrow)



M4-9TL
DETOUR (with Arrow)



M4-9TR
DETOUR (with Arrow)



M4-9aL
Bicyclist/Pedestrian
DETOUR



M4-9aR
Bicyclist/Pedestrian
DETOUR



M4-9bL
Pedestrian DETOUR



M4-9bR
Pedestrian DETOUR



M4-9cL
Bicyclist DETOUR
(with Arrow)



M4-9cR
Bicyclist DETOUR
(with Arrow)



M4-10L
DETOUR (Arrow)



M4-10R
DETOUR (Arrow)



M4-11PT
TEMPORARY (Plaque)



D70
DRIVEWAY
(with Arrow) (Blue)



D70a
DRIVEWAY
(with Arrow) (Blue)



D70S
SHOPPING MALL
DRIVEWAY
(with Arrow) (Blue)



D70R
RESTAURANT
DRIVEWAY
(with Arrow) (Blue)



D70G
GAS DRIVEWAY
(with Arrow) (Blue)



D70B
BUSINESS DRIVEWAY
(with Arrow) (Blue)



D70M
MOTEL DRIVEWAY
(with Arrow) (Blue)



R1-2
YIELD

CONSTRUCTION



R1-7
WAIT ON STOP



R1-7aT
WAIT ON Stop



R1-8
GO ON SLOW



R1-8aT
GO ON SLOW



R20-3T
STATE LAW OBEY
WARNING SIGNS




R20-5T
TRAFFIC FINES
DOUBLE



R20-5aPT
WHEN WORKERS
ARE PRESENT
(Plaque)



R22-2
TURN OFF 2-WAY
RADIO AND CELL
PHONE

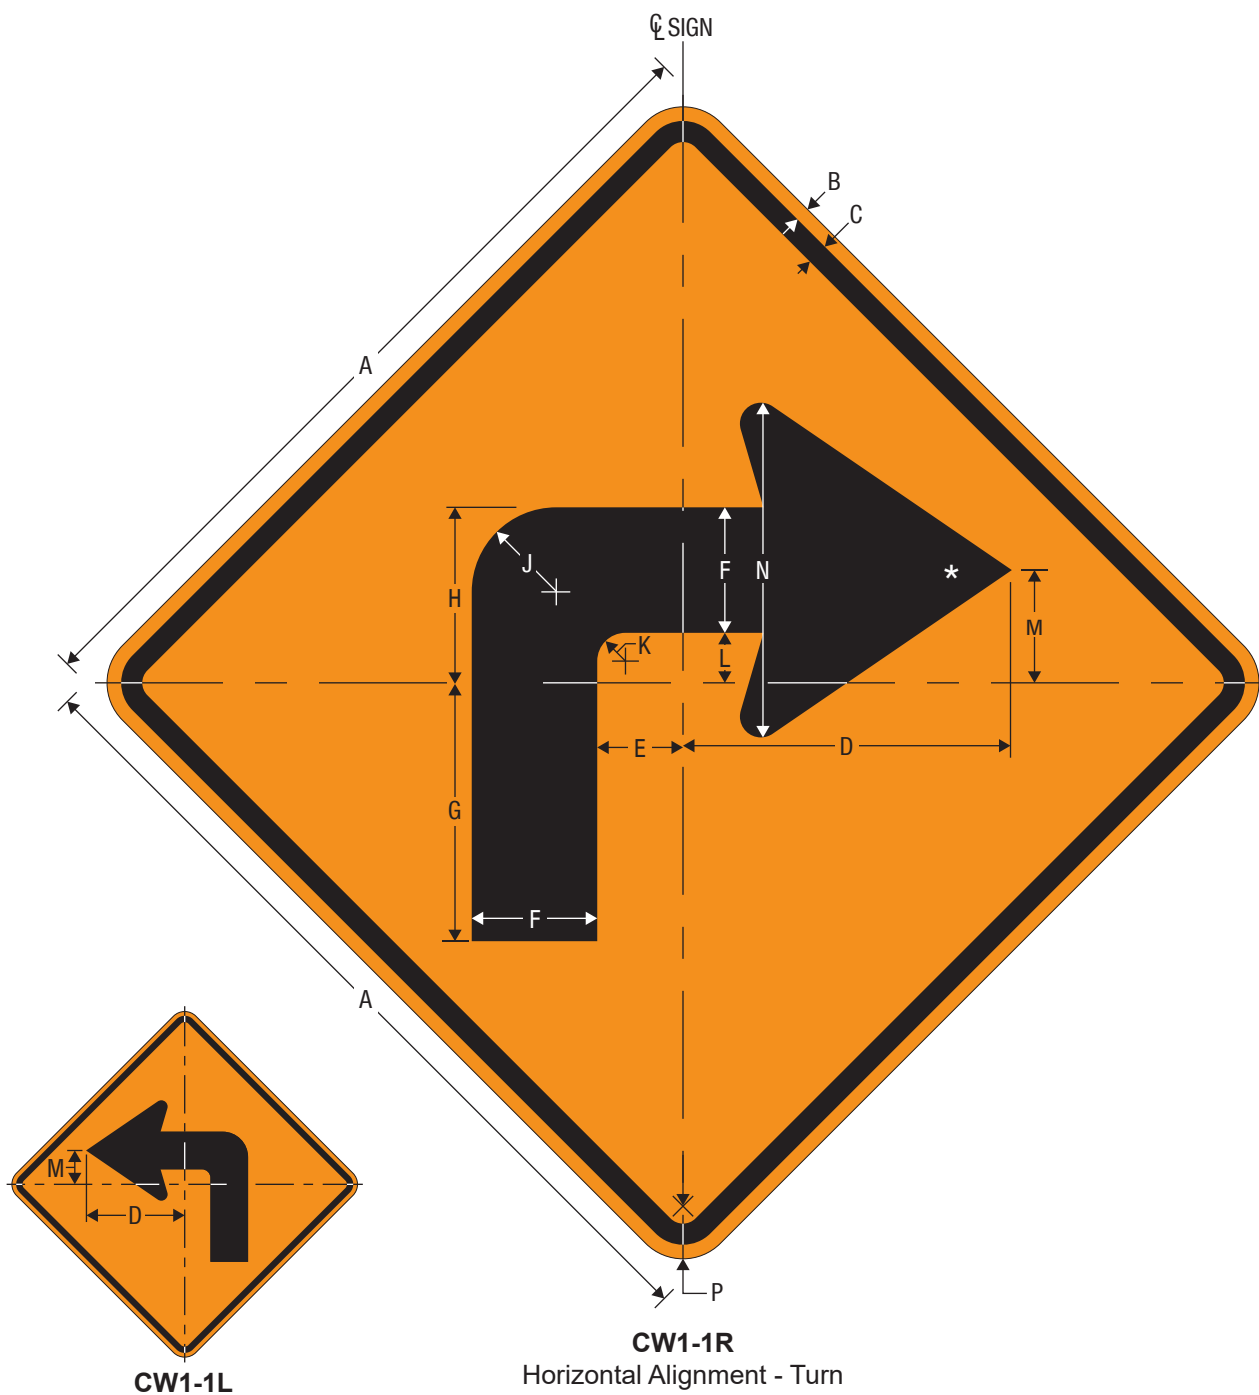


*See Section 11 for arrow design.



A	B	C	D	E	F	G	H	J	K	L	M	N	P
18	0.375	0.625	7	1.827	2.672	5.5	3.736	1.800	0.600	1.064	2.400	7.125	1.5
30	0.5	0.75	11.667	3.044	4.453	9.167	6.227	3	1	1.773	4	11.875	1.875
36	0.625	0.875	14	3.653	5.344	11	7.472	3.6	1.200	2.128	4.8	14.25	2.25
48	0.75	1.25	18.667	4.871	7.125	14.667	9.963	4.8	1.600	2.838	6.400	19	3


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

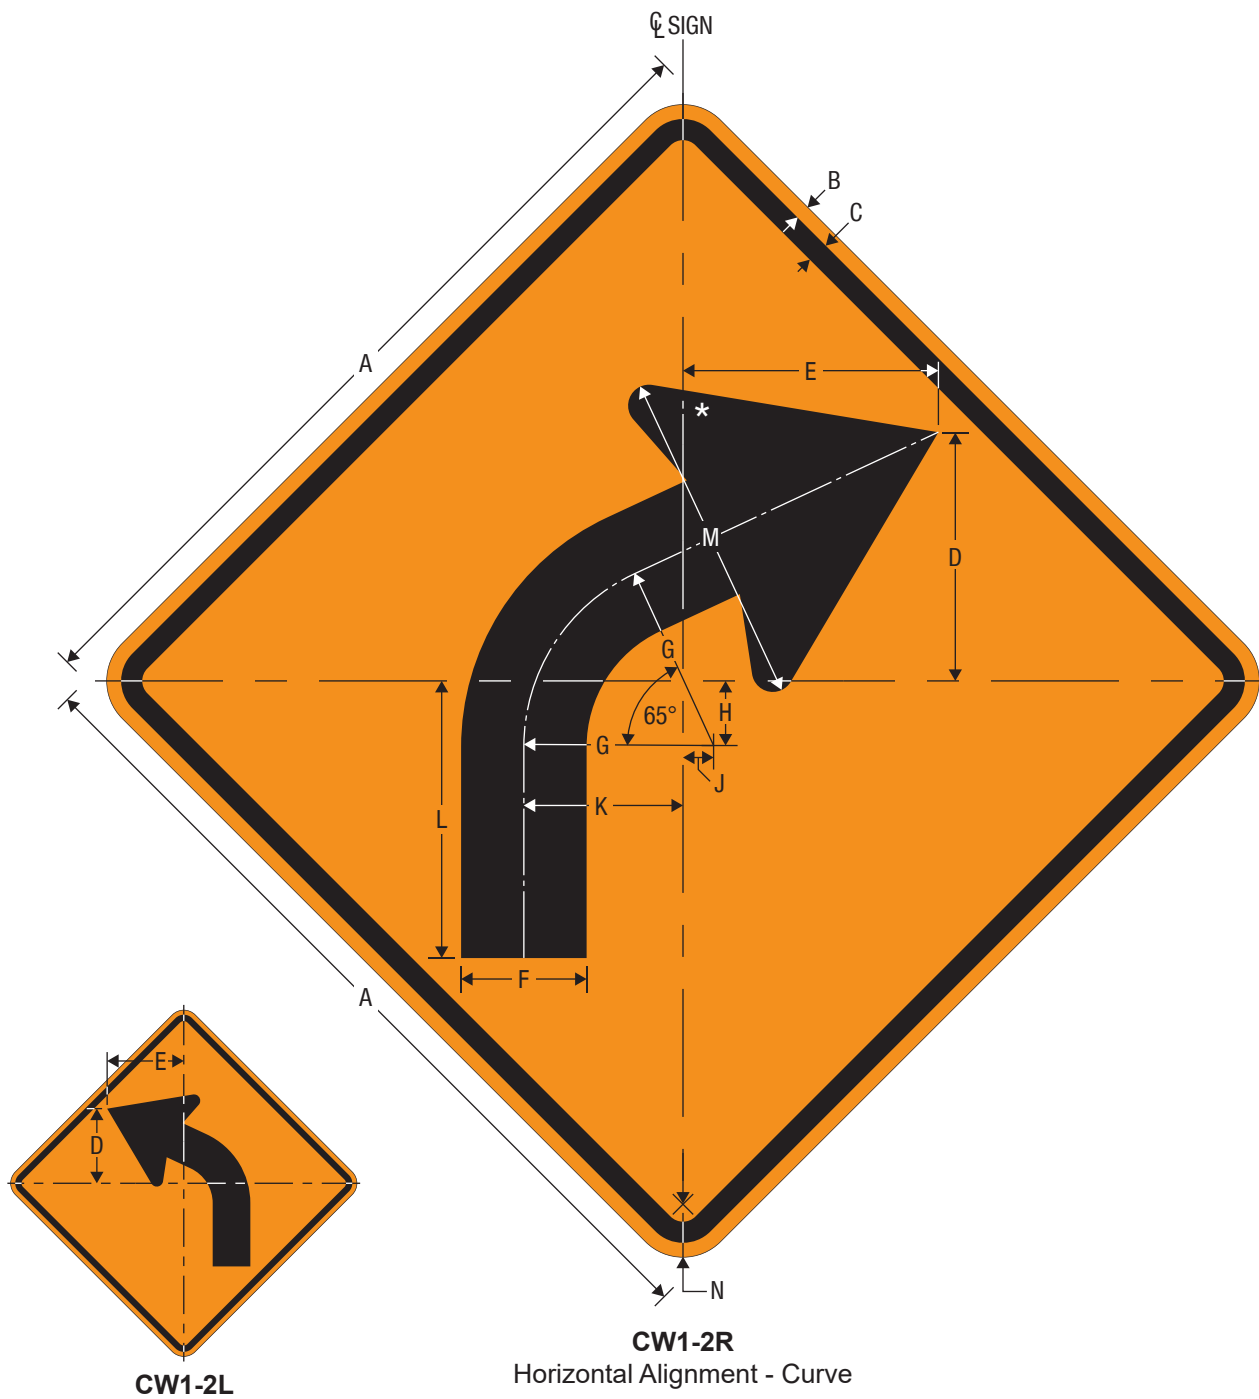

*See Section 11 for arrow design.

	A	B	C	D	E	F	G	H	J	K	L	M	N
18	18	0.375	0.625	5.294	5.437	2.672	4.050	1.402	0.662	3.388	5.875	7.125	1.5
30	30	0.5	0.75	8.823	9.062	4.453	6.75	2.337	1.103	5.647	9.792	11.875	1.875
36	36	0.625	0.875	10.587	10.875	5.344	8.100	2.804	1.324	6.776	11.75	14.25	2.25
48	48	0.75	1.25	14.116	14.5	7.125	10.800	3.739	1.765	9.035	15.667	19	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

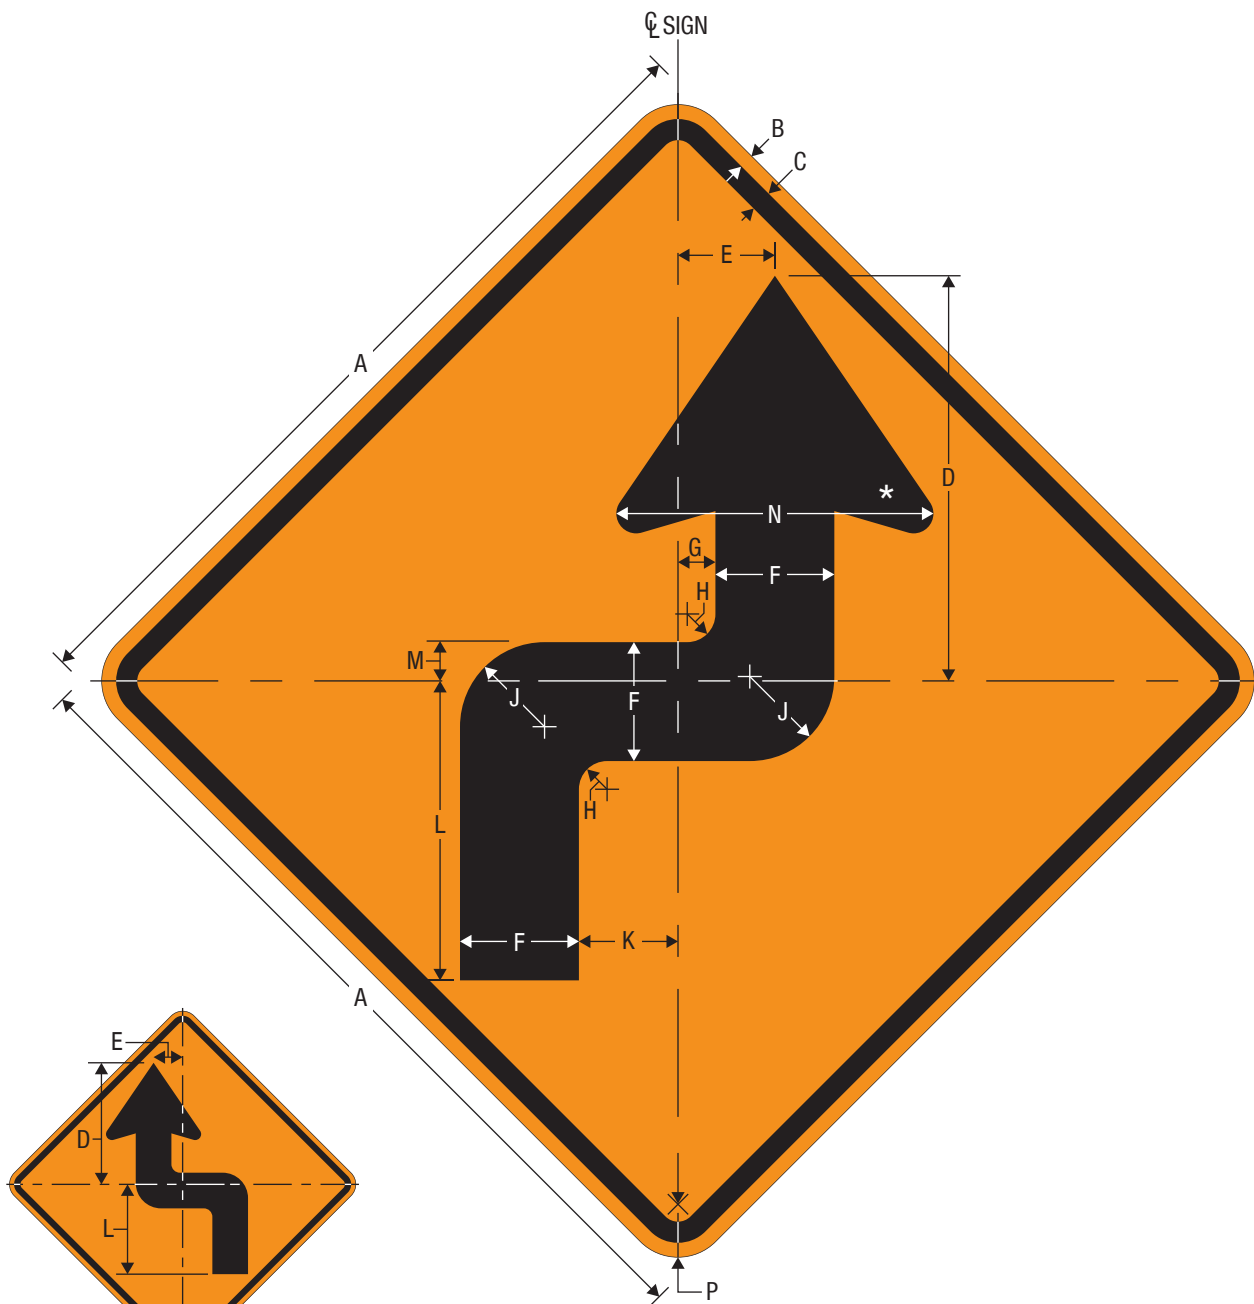

CW1-3L


CW1-3R
Horizontal Alignment - Reverse Turn

*See Section 11 for arrow design.




	A	B	C	D	E	F	G	H	J	K	L	M	N	P
18	18	0.375	0.625	8.625	2.063	2.531	0.797	0.600	1.800	2.109	6.375	0.825	6.75	1.5
30	30	0.5	0.75	14.375	3.438	4.219	1.328	1	3	3.516	10.625	1.375	11.25	1.875
36	36	0.625	0.875	17.25	4.125	5.063	1.594	1.200	3.600	4.219	12.75	1.650	13.5	2.25
48	48	0.75	1.25	23	5.5	6.75	2.125	1.600	4.800	5.625	17	2.200	18	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

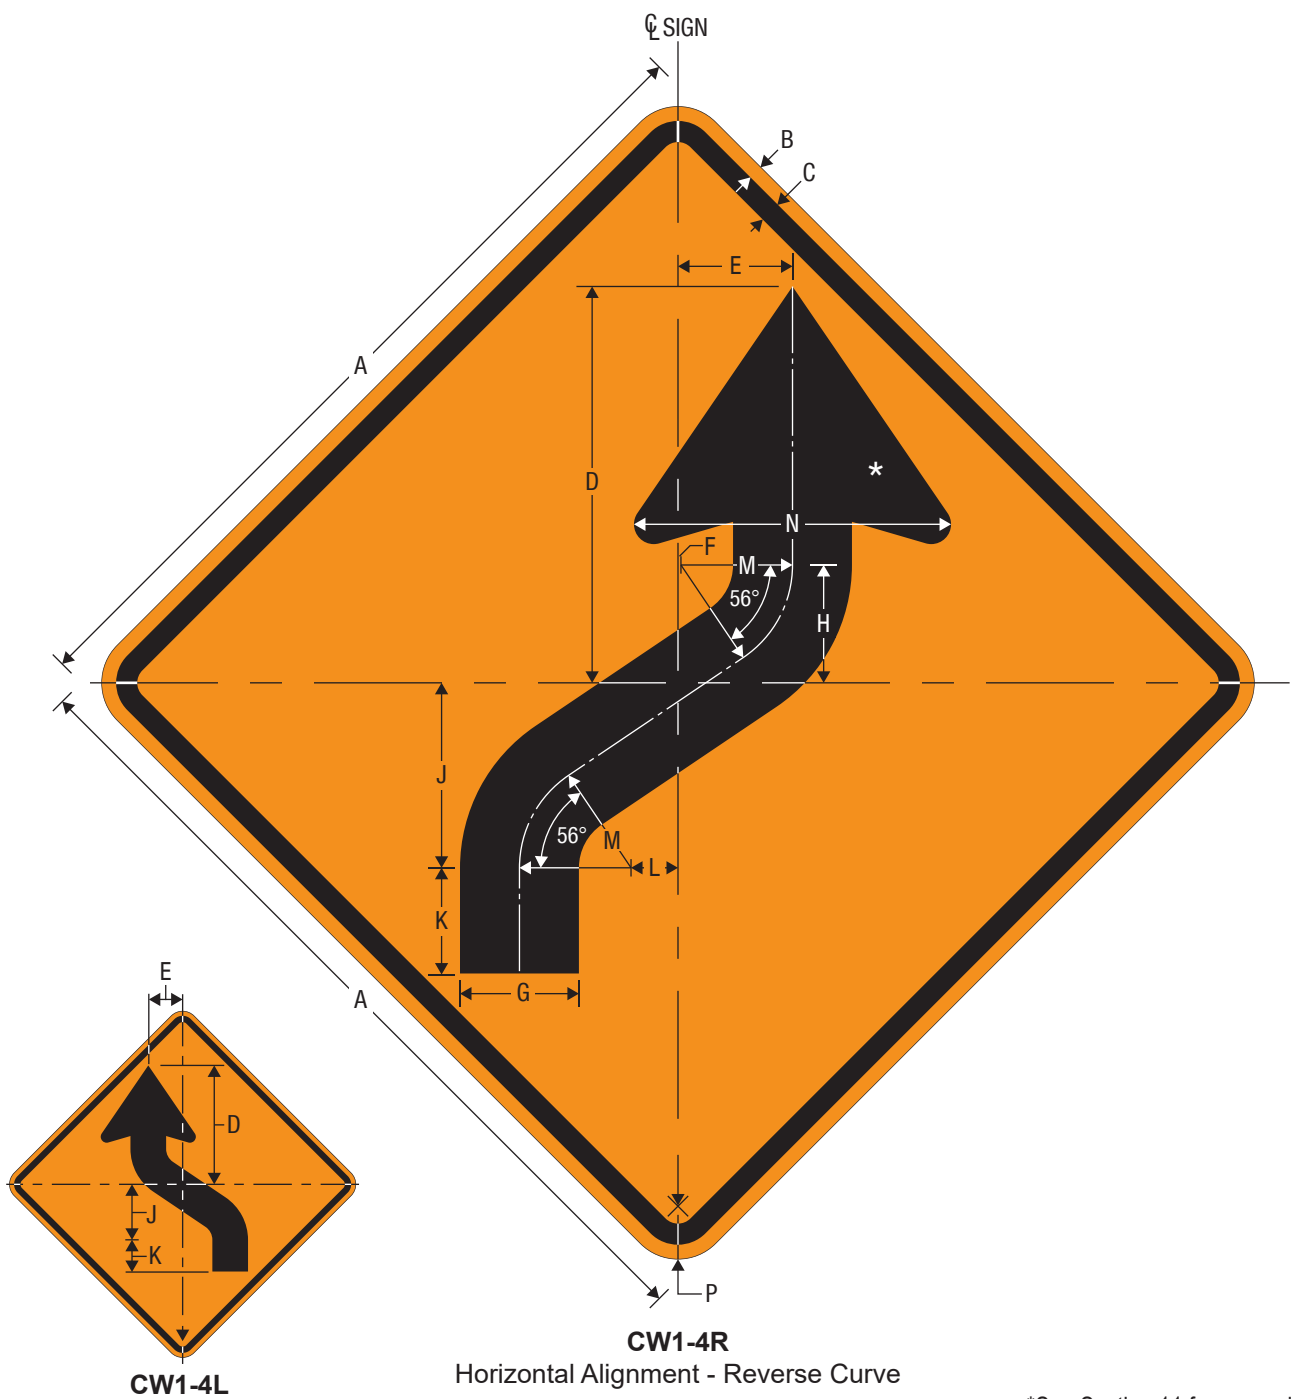


	A	B	C	D	E	F	G	H	J	K	L	M	N	P
	18	0.375	0.625	8.438	2.438	0.063	2.531	2.509	3.938	2.25	1	2.375	6.75	1.5
	30	0.5	0.75	14.062	4.063	0.104	4.219	4.181	6.562	3.75	1.667	3.958	11.25	1.875
	36	0.625	0.875	16.875	4.875	0.125	5.063	5.017	7.875	4.5	2	4.75	13.5	2.25
	48	0.75	1.25	22.5	6.5	0.167	6.75	6.690	10.5	6	2.667	6.333	18	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

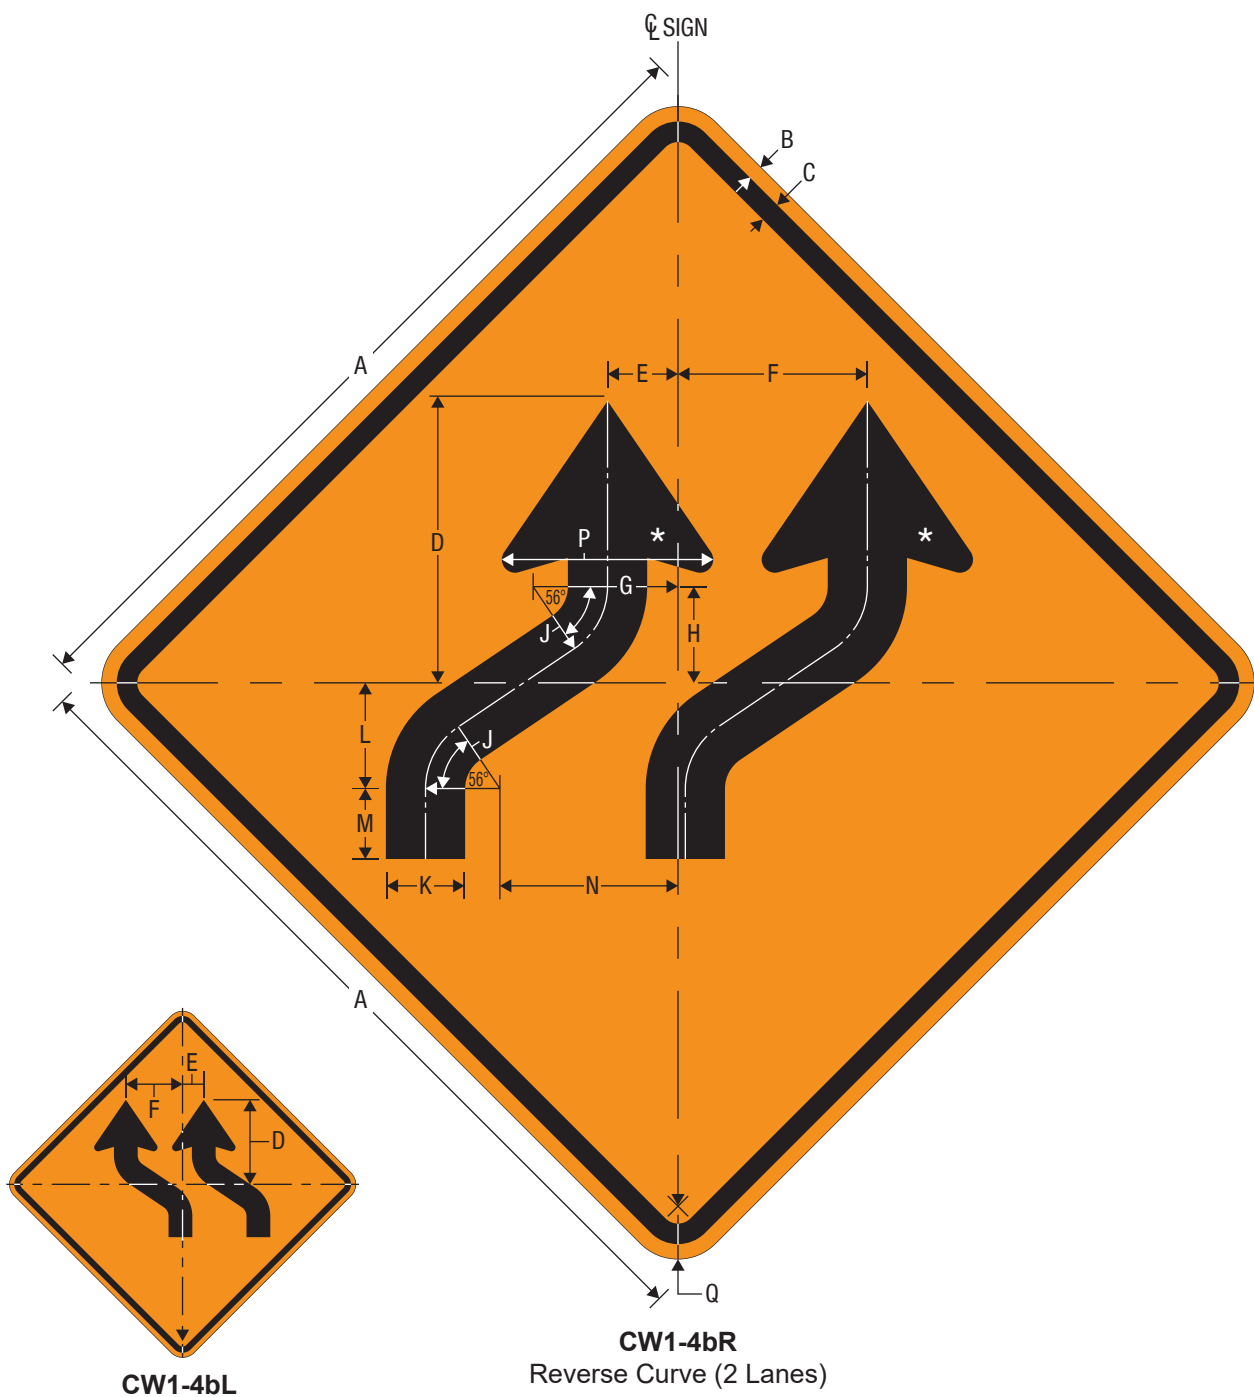

*See Section 11 for arrow design.

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q
30	0.5	0.75	10	2.5	6.719	5.139	3.412	2.639	2.813	3.75	2.5	6.319	7.5	1.875
36	0.625	0.875	12	3	8.063	6.167	4.095	3.167	3.375	4.5	3	7.583	9	2.25
48	0.75	1.25	16	4	10.75	8.222	5.460	4.222	4.5	6	4	10.111	12	3

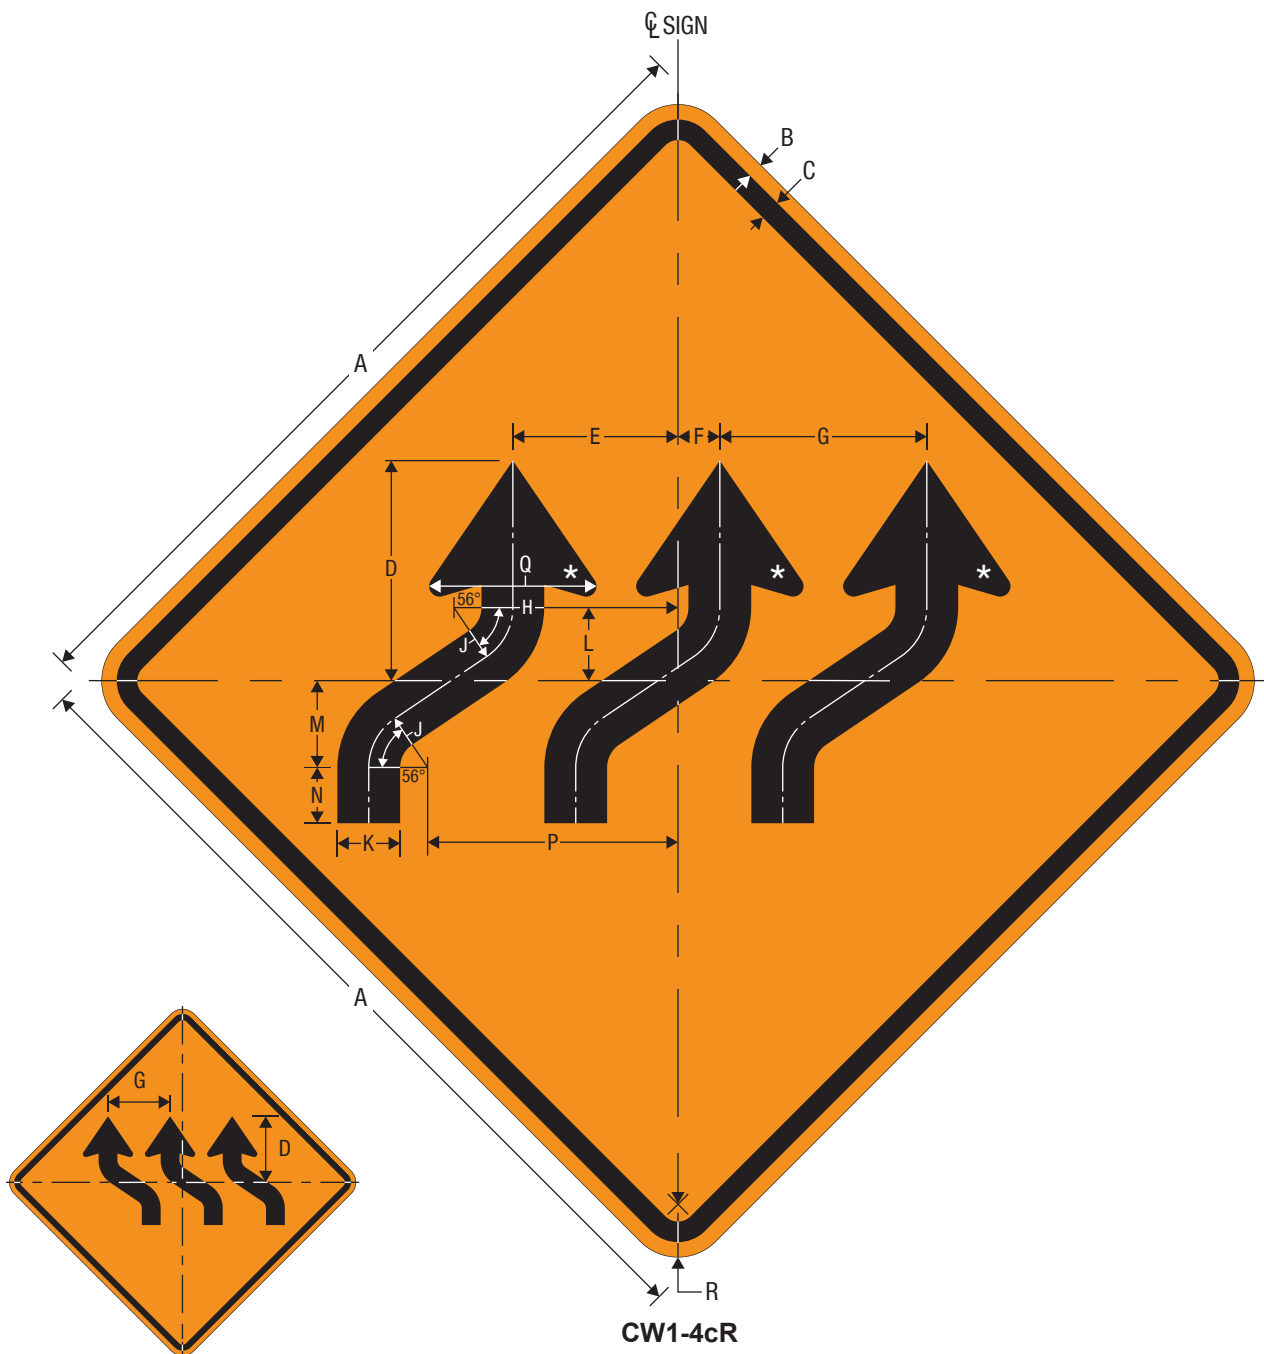

CW1-4cL


CW1-4cR
Reverse Curve (3 Lanes)

*See Section 11 for arrow design.


A	B	C	D	E	F	G	H
30	0.5	0.75	7.813	5.859	1.484	7.344	7.948
36	0.625	0.875	9.375	7.031	1.781	8.813	9.538
48	0.75	1.25	12.5	9.375	2.375	11.75	12.718

J	K	L	M	N	P	Q	R
2.089	2.227	2.597	3.073	1.979	8.883	5.938	1.875
2.507	2.672	3.117	3.688	2.375	10.660	7.125	2.25
3.343	3.563	4.156	4.917	3.167	14.213	9.5	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

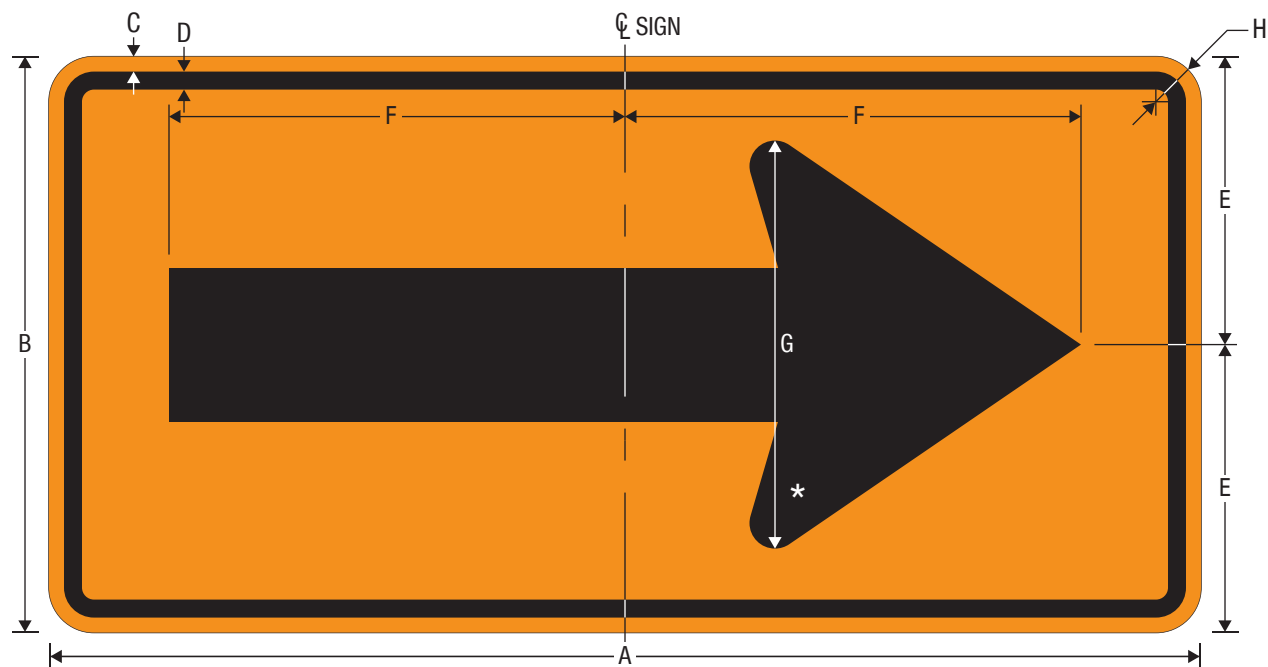

CW1-6R
Large Arrow (1-Direction)

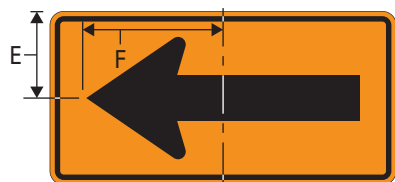


CW1-6L

*See Section 11 for arrow design.




A	B	C	D	E	F	G	H
24	12	0.375	0.438	6	9.5	8.5	1.5
36	18	0.375	0.625	9	14.25	12.75	1.5
48	24	0.375	0.625	12	19	17	1.5
60	30	0.5	0.75	15	23.75	21.25	1.875

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

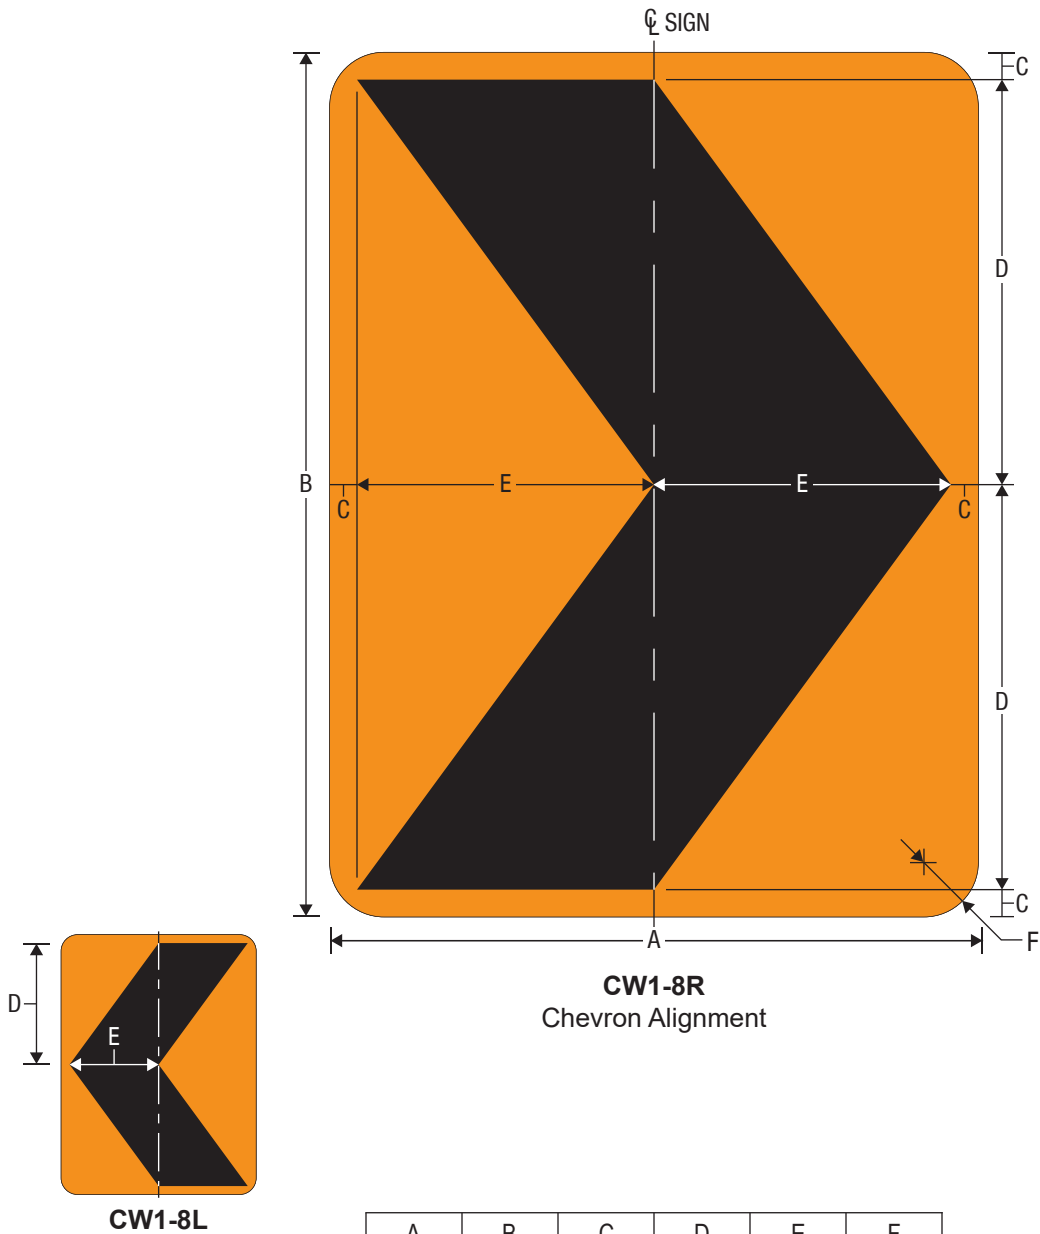

A	B	C	D	E	F
12	18	0.5	8.5	5.5	1.5
18	24	0.75	11.25	8.25	1.5
24	30	0.875	14.125	11.125	1.5
30	36	1	17	14	1.875
36	48	1.125	22.875	16.875	2.25

COLORS: LEGEND - BLACK
BACKGROUND - ORANGE
NO BORDER

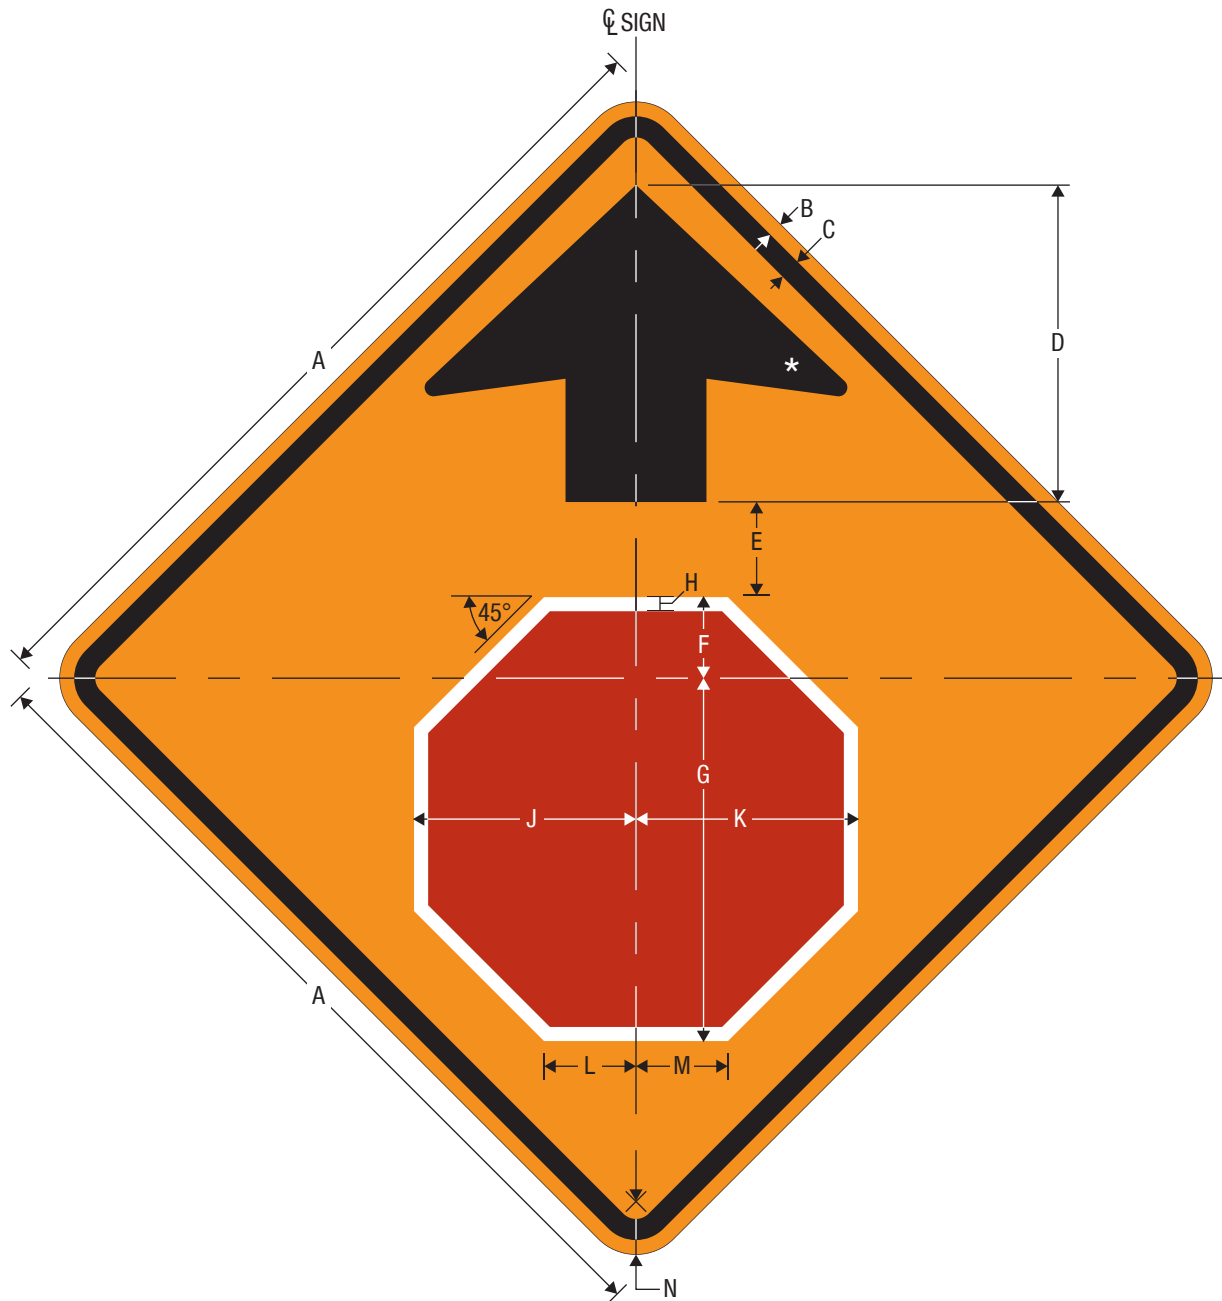


CW3-1
Stop Ahead

*See Section 11 for arrow design.



A	B	C	D	E	F	G	H	J	K	L	M	N
18	0.375	0.625	6.75	2	1.75	7.75	0.313	4.75	4.75	1.968	1.967	1.5
30	0.5	0.75	11.25	3.375	2.875	12.875	0.5	7.875	7.875	3.262	3.262	1.875
36	0.625	0.875	13.5	4.125	3.375	15.625	0.625	9.5	9.5	3.935	3.935	2.25
48	0.75	1.25	18	5.5	4.5	20.625	0.75	12.563	12.562	5.204	5.203	3

COLORS: ARROW, BORDER - BLACK
SYMBOL - RED
SYMBOL BORDER - WHITE
BACKGROUND - ORANGE

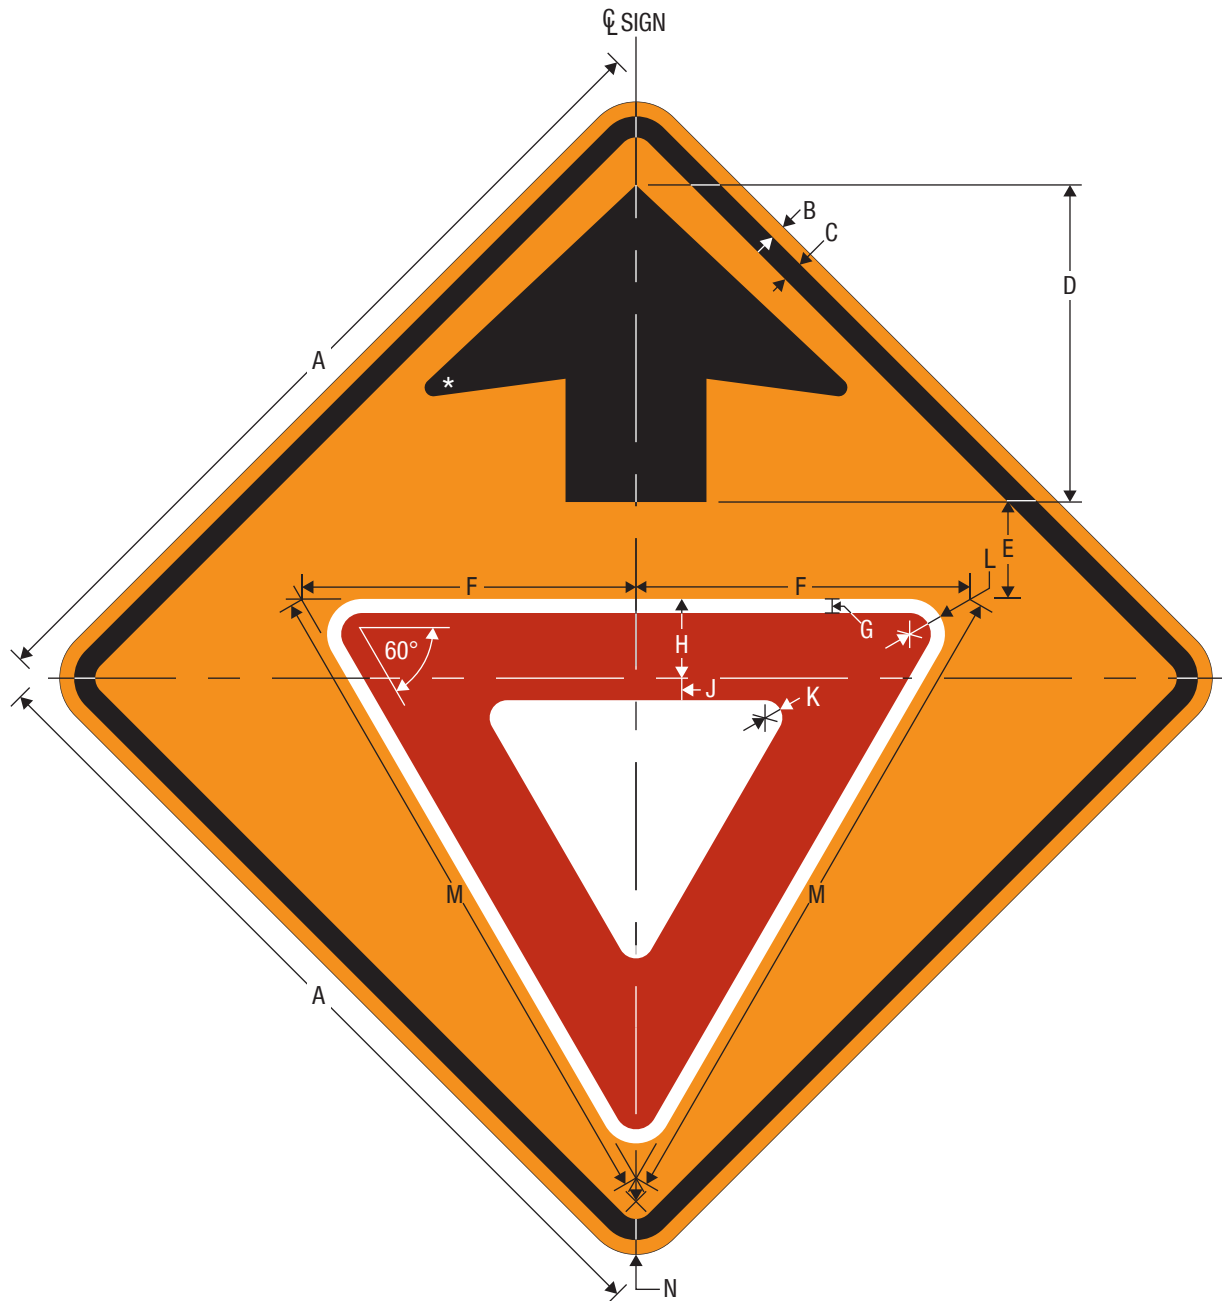


CW3-2
Yield Ahead

*See Section 11 for arrow design.



	A	B	C	D	E	F	G	H	J	K	L	M	N
18	18	0.375	0.625	6.75	2.063	7.125	0.313	1.688	0.469	0.375	0.75	14.25	1.5
30	30	0.5	0.75	11.25	3.438	11.875	0.5	2.813	0.781	0.625	1.25	23.75	1.875
36	36	0.625	0.875	13.5	4.125	14.25	0.625	3.375	0.938	0.75	1.375	28.5	2.25
48	48	0.75	1.25	18	5.5	19	0.75	4.5	1.25	1	1.875	38	3

COLORS: ARROW, BORDER - BLACK
SYMBOL - RED
SYMBOL BORDER & INTERIOR - WHITE
BACKGROUND - ORANGE

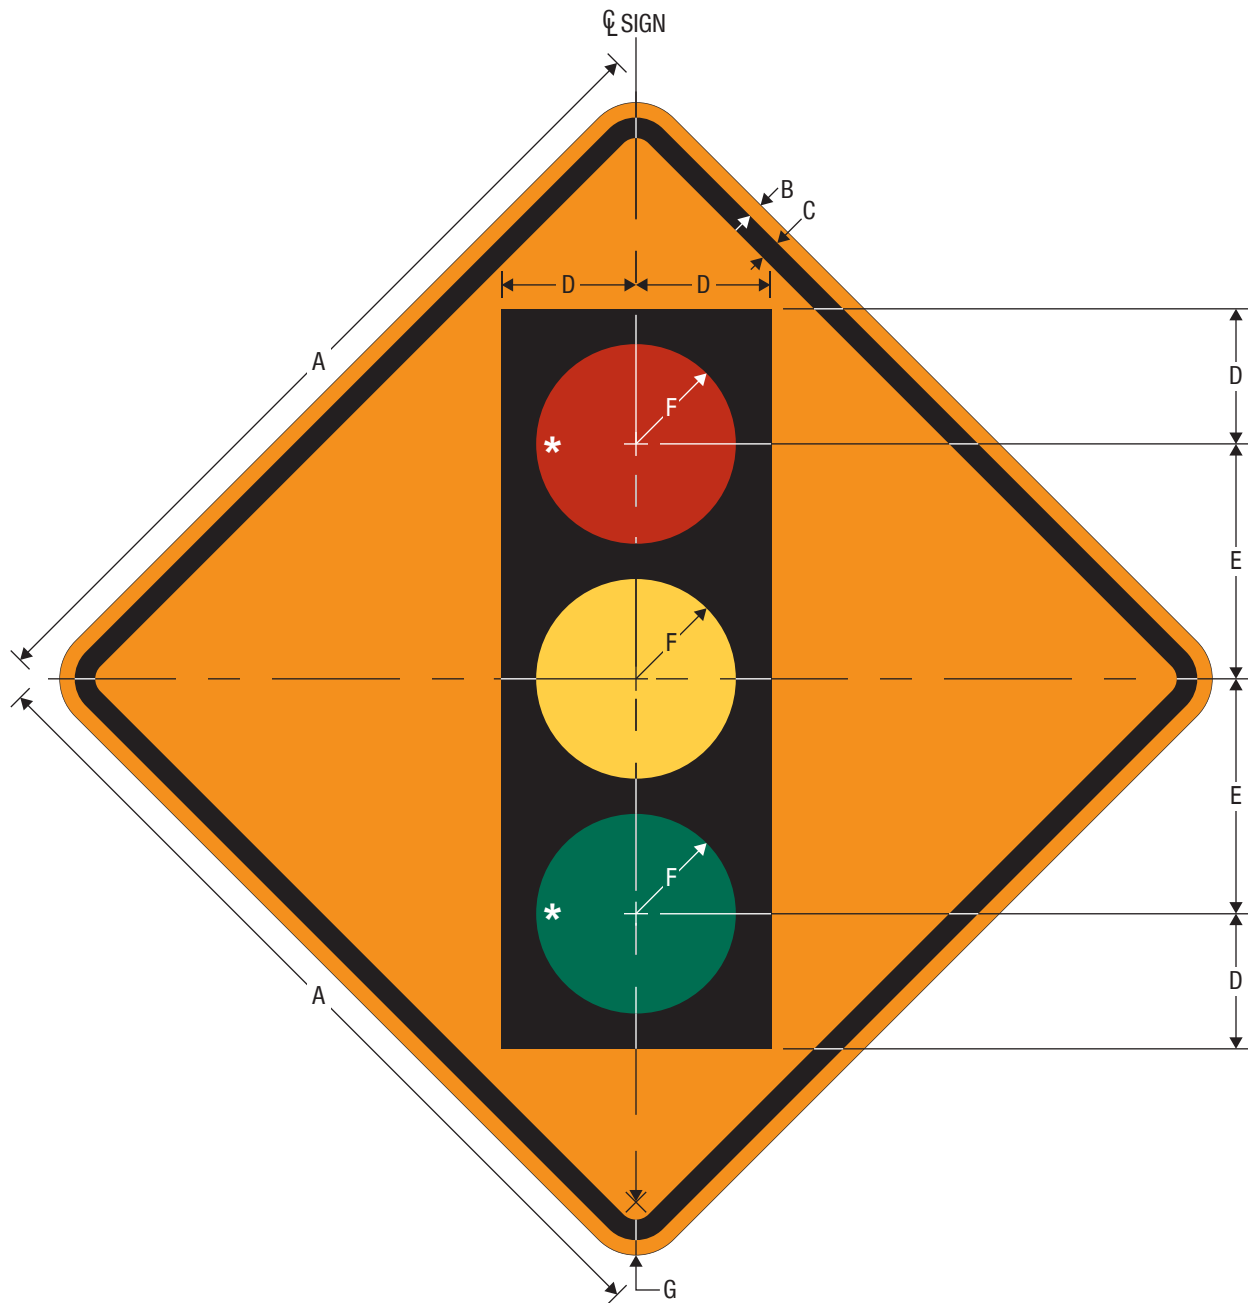

CW3-3
Signal Ahead

	A	B	C	D	E	F	G
	18	0.375	0.625	3	5	2.25	1.5
	30	0.5	0.75	5	8.75	3.75	1.875
	36	0.625	0.875	5.75	10	4.25	2.25
	48	0.75	1.25	7.5	12.5	5	3

*Red and green color to be direct-applied unless over white sheeting.


COLORS: LEGEND, BORDER - BLACK
TOP CIRCLE - RED
MIDDLE CIRCLE - YELLOW
BOTTOM CIRCLE - GREEN
BACKGROUND - ORANGE



CW3-4
BE PREPARED TO STOP

A	B	C	D	E	F	G	H
30	0.5	0.75	4D	2.75	4.25	0.75	1.875
36	0.625	0.875	5D	3.5	5	1	2.25
48	0.75	1.25	7D	4.75	6.75	1.25	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

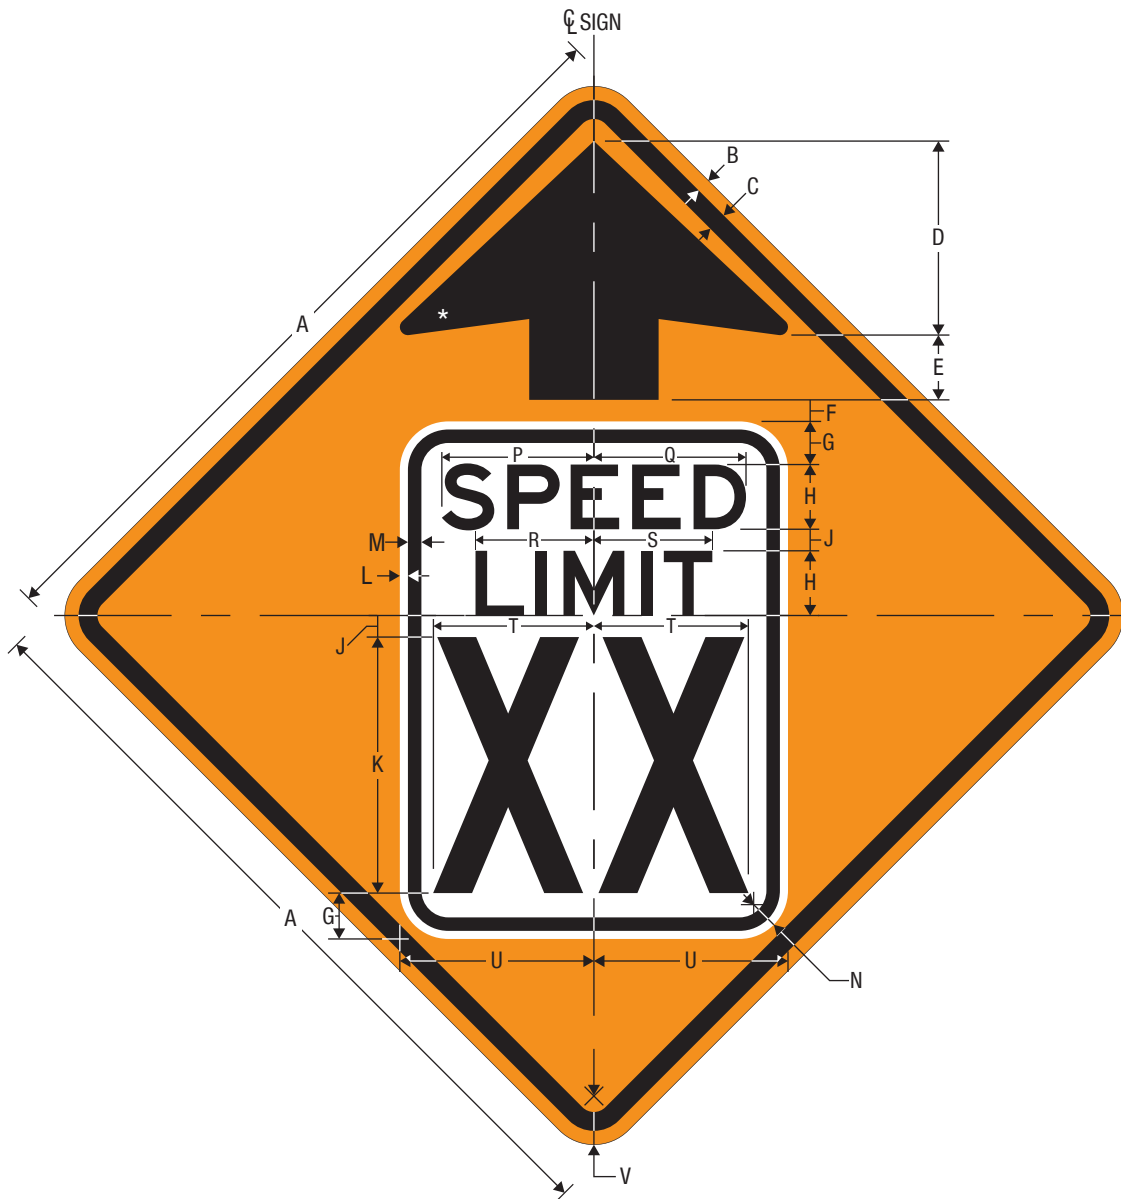

CW3-5
Reduced Speed Limit Ahead

*See Section 11 for arrow design.

**Optically space numerals about centerline.

A	B	C	D	E	F	G	H	J	K
30	0.5	0.75	10	2.5	0.5	1.625	2.5E	0.875	10C
36	0.625	0.875	12	3	1	2	3E	1	12C
48	0.75	1.25	16	4	1.5	2.25	4E	1.25	15C

L	M	N	P	Q	R	S	T	U	V
0.313	0.5	1.875	5.877	5.877	4.576	4.575	VAR**	7.5	1.875
0.375	0.625	2.25	7.053	7.052	5.491	5.491	VAR**	9	2.25
0.375	0.625	3	9.403	9.403	7.321	7.321	VAR**	12	3

COLORS: LEGEND, ARROW, BORDER - BLACK
INNER PANEL BACKGROUND - WHITE
BACKGROUND - ORANGE




CW3-5a
XX MPH SPEED ZONE AHEAD

A	B	C	D	E	F	G	H
30	0.5	0.75	4C	3	2	VAR	2.25
36	0.625	0.875	5C	3.625	2.5	VAR	3
48	0.75	1.25	7C	4.625	3.5	VAR	3.25

J	K	L	M	N	P	Q
8.804	13.645	2.5	11.164	7.003	7.002	1.875
11.005	17.056	3.125	13.955	8.753	8.753	2.25
15.407	23.879	4.25	19.537	12.255	12.254	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

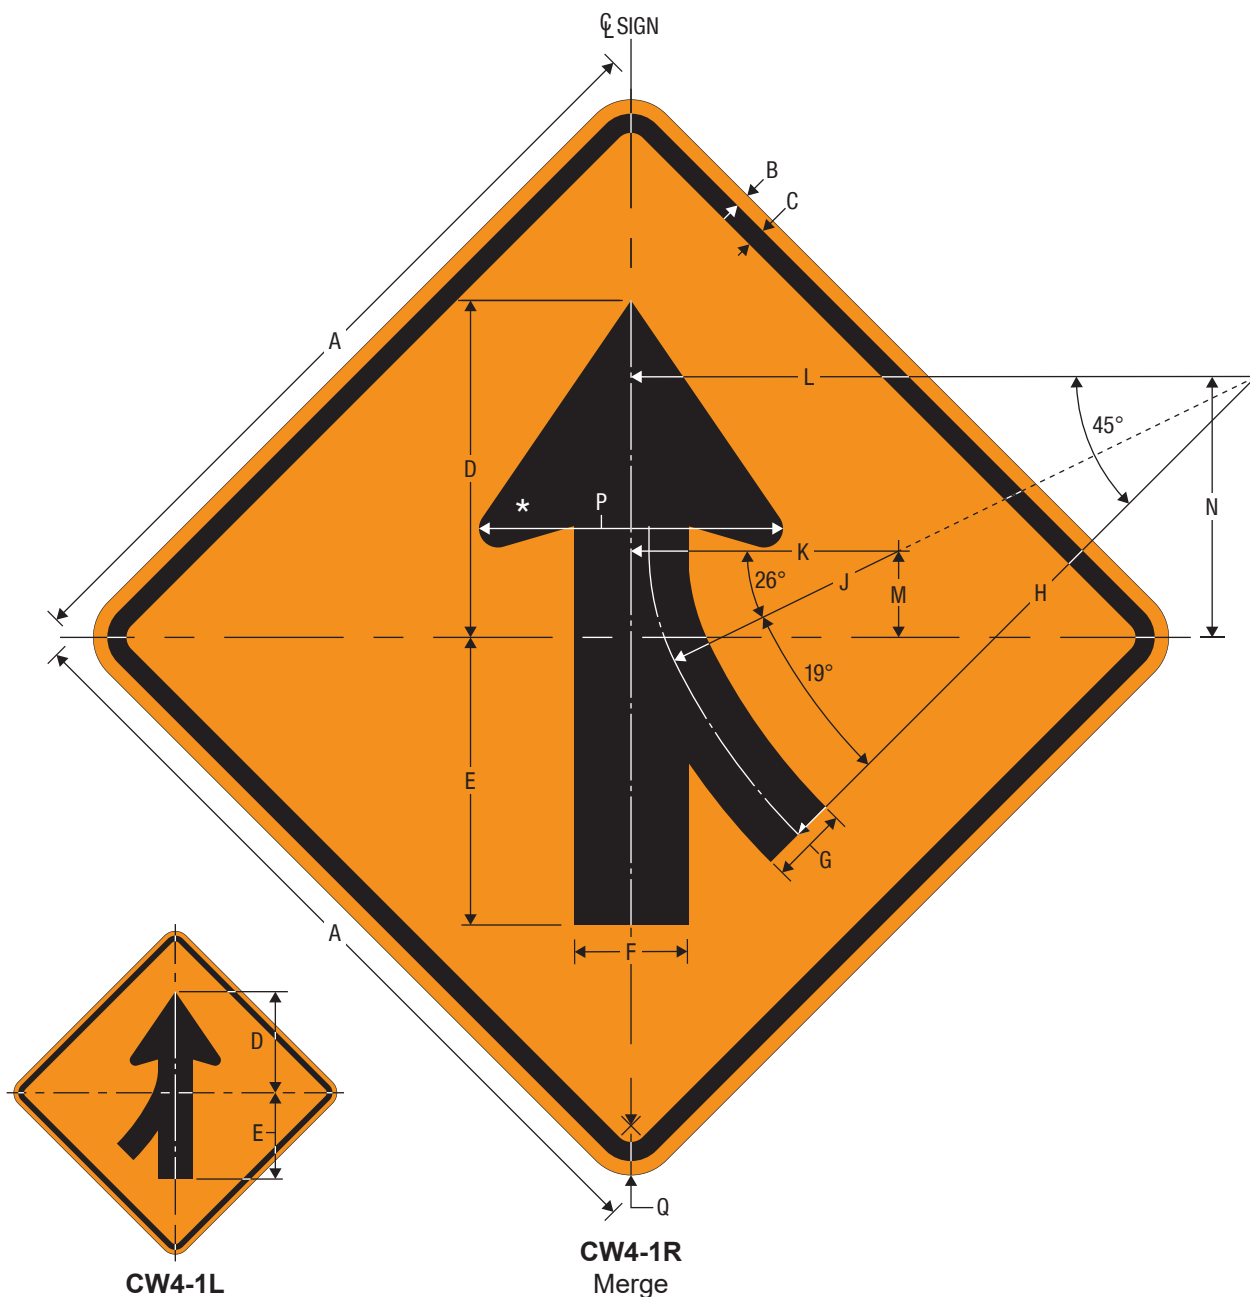


*See Section 11 for arrow design.

A	B	C	D	E	F	G	H
30	0.5	0.75	12.813	10.938	4.336	2.969	24.609
36	0.625	0.875	15.375	13.125	5.203	3.563	29.531
48	0.75	1.25	20.5	17.5	6.938	4.75	39.375

J	K	L	M	N	P	Q
9.492	10.176	23.763	3.281	9.908	11.563	1.875
11.391	12.211	28.516	3.938	11.890	13.875	2.25
15.188	16.281	38.021	5.25	15.853	18.5	3


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

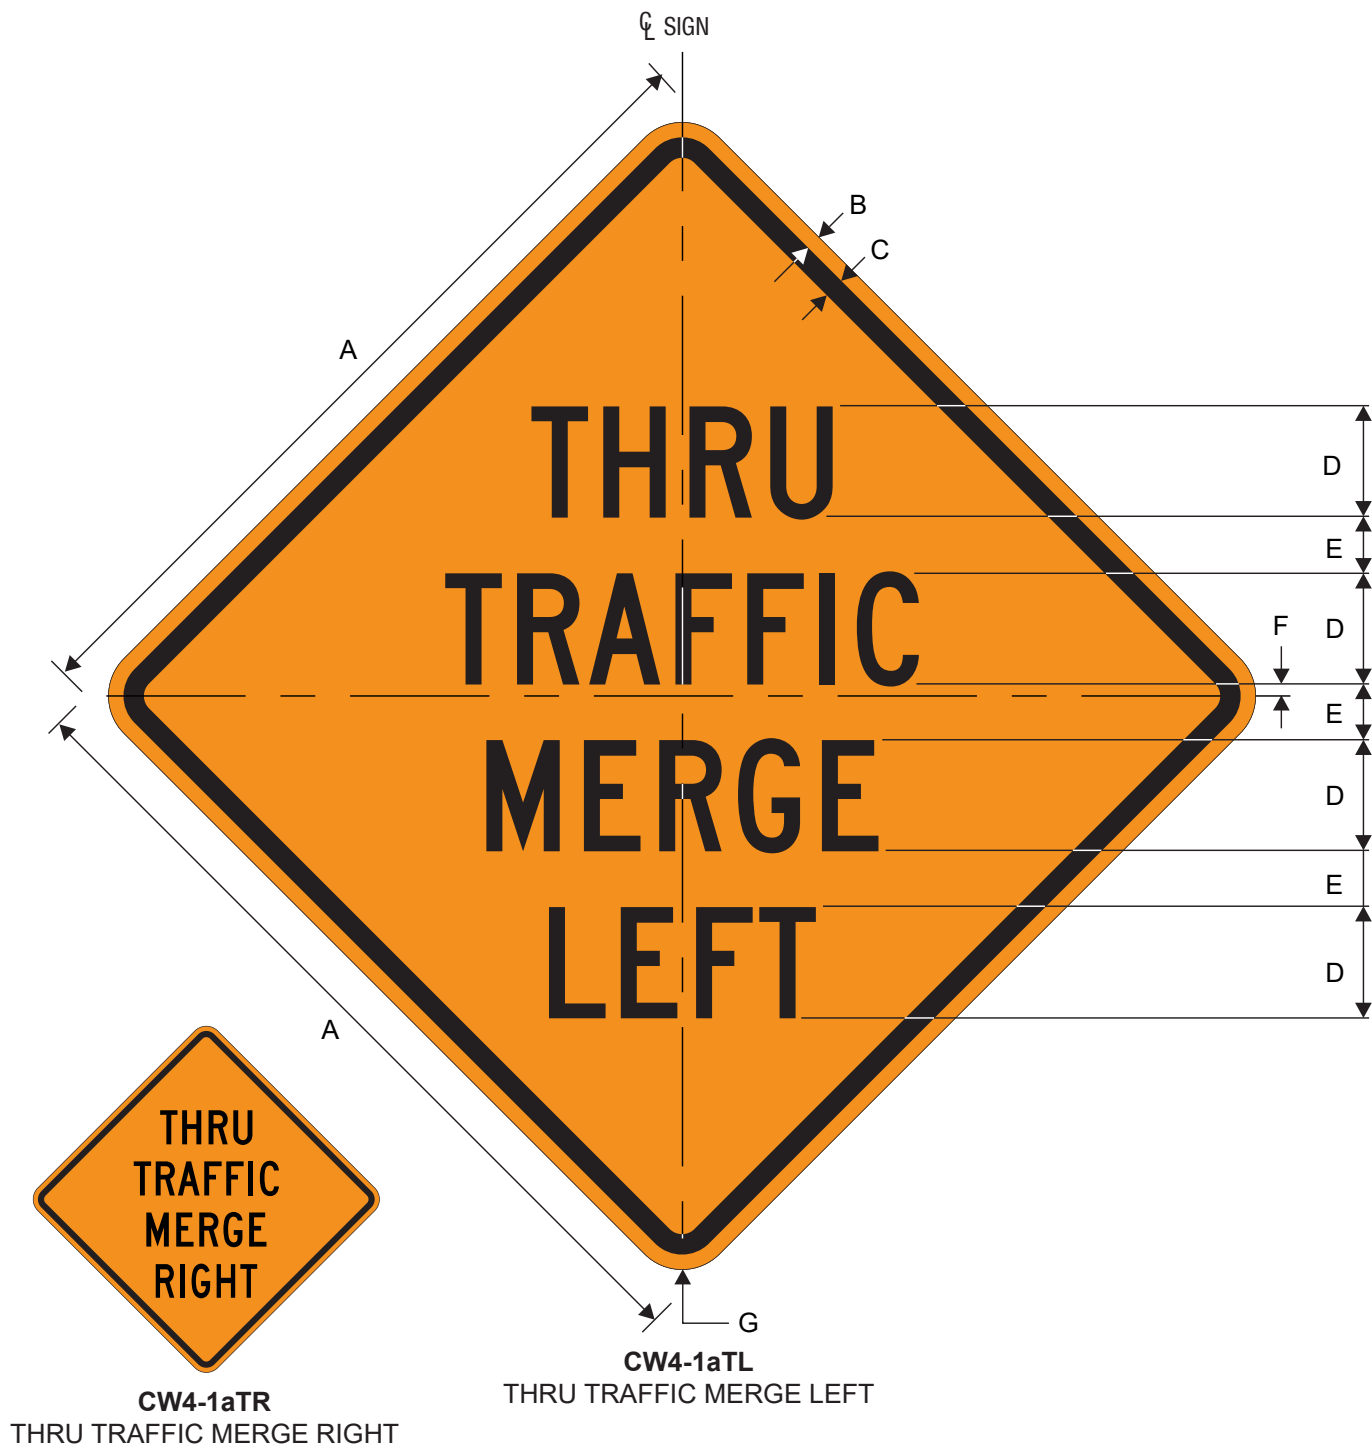

A	B	C	D	E	F	G
36	.625	.875	5C	2.4	.56	2.25
48	.75	1.25	6C	3	.72	3


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



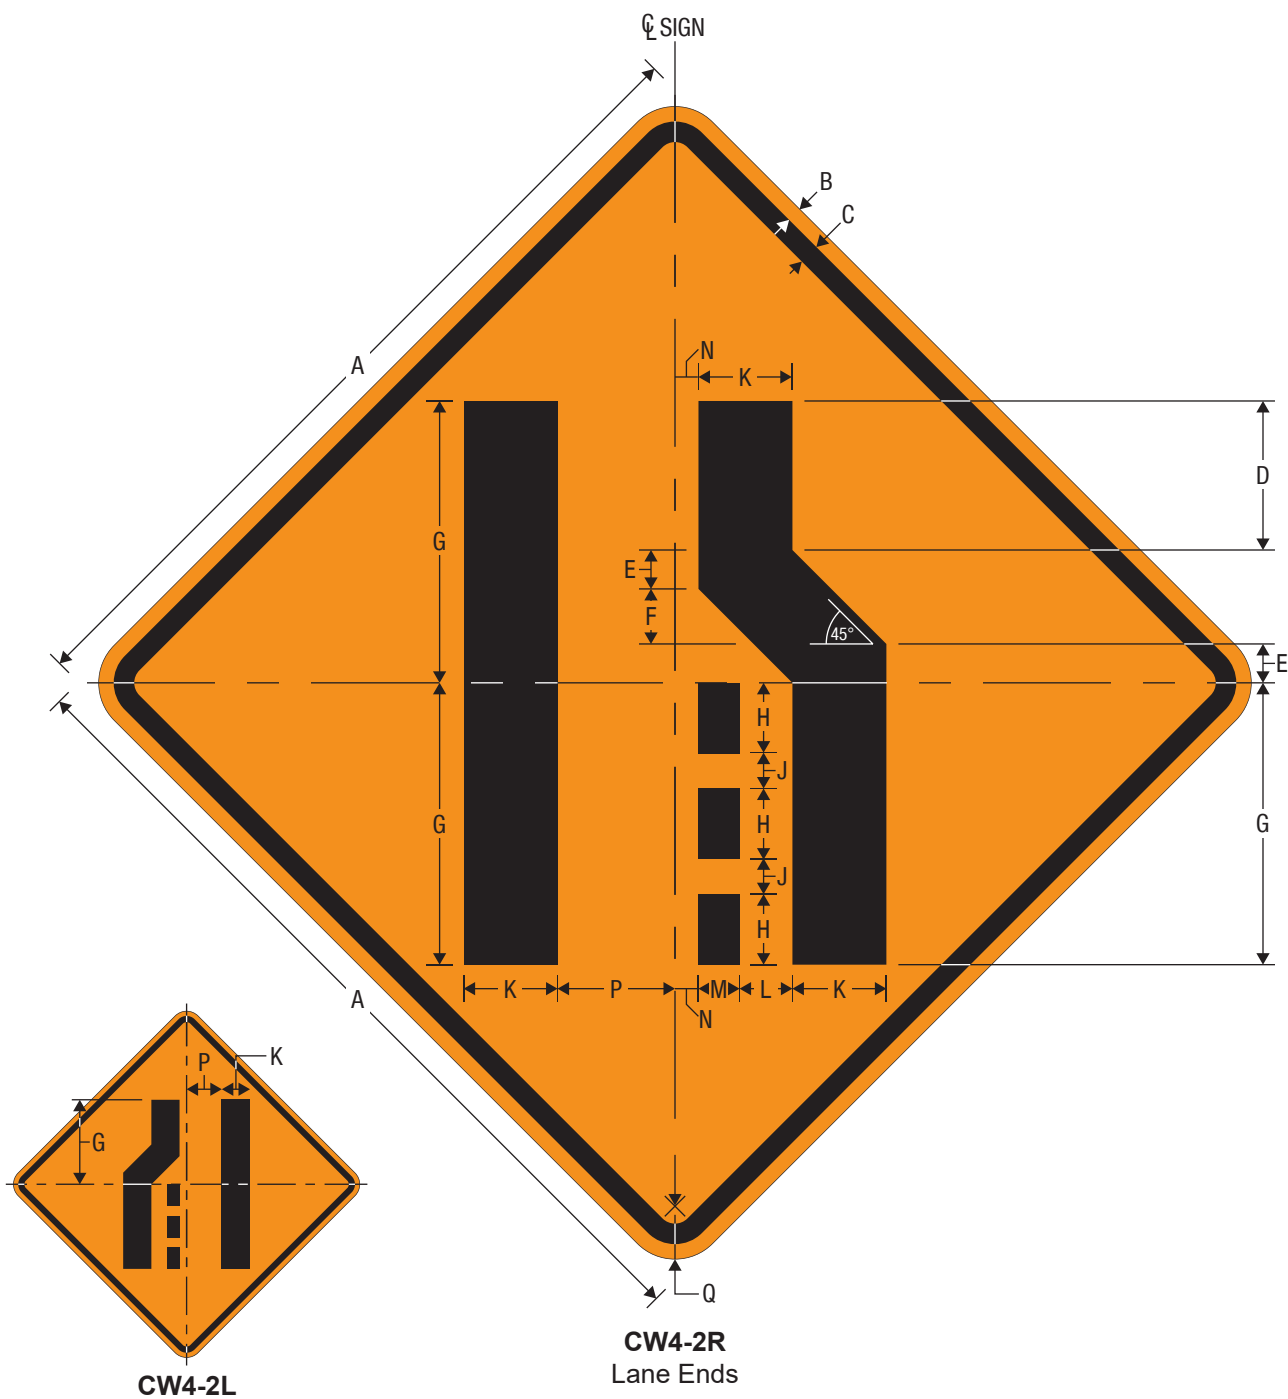

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q
30	0.5	0.75	5.290	1.398	1.914	10	2.5	1.25	3.375	1.813	1.5	0.875	4.188	1.875
36	0.625	0.875	6.344	1.656	2.344	12	3	1.5	4	2.25	1.75	1	5	2.25
48	0.75	1.25	8.336	2.226	3.212	16	4	2	5.375	3.063	2.375	1.25	6.688	3


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

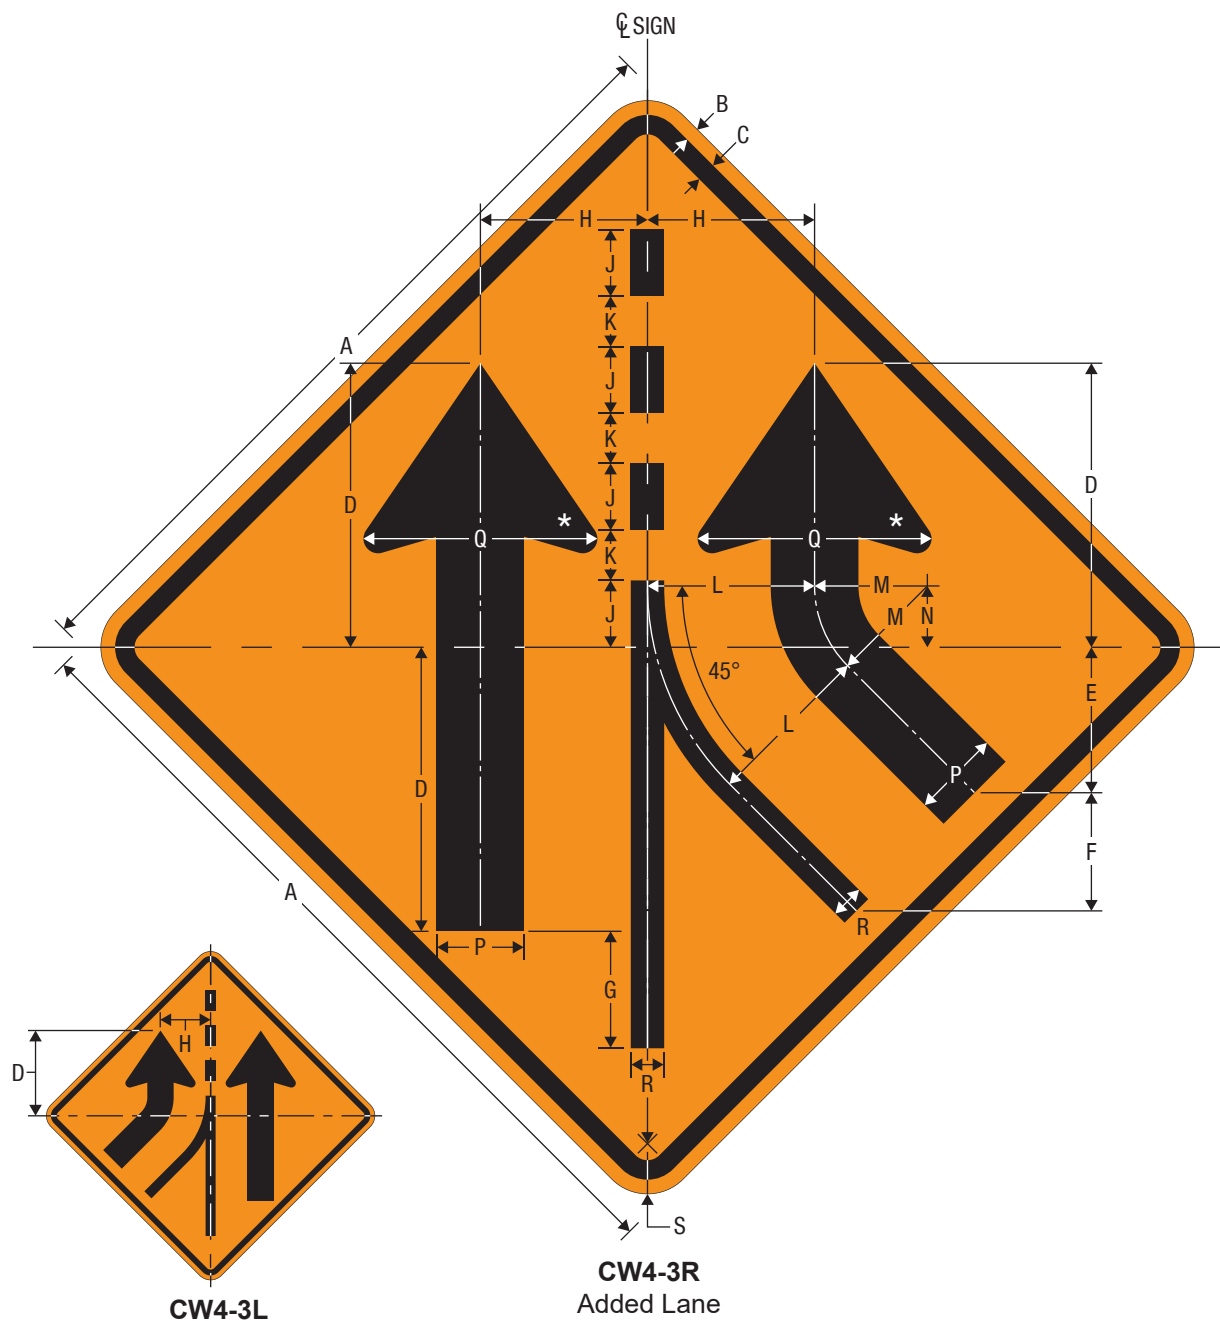

A	B	C	D	E	F	G	H	J
30	0.5	0.75	10.625	5.442	4.419	4.375	6.25	2.5
36	0.625	0.875	12.75	6.530	5.303	5.25	7.5	3
48	0.75	1.25	17	8.707	7.071	7	10	4

K	L	M	N	P	Q	R	S
1.875	6.25	4.219	2.292	3.281	8.75	1.25	1.875
2.25	7.5	5.063	2.75	3.938	10.5	1.5	2.25
3	10	6.75	3.667	5.25	14	2	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

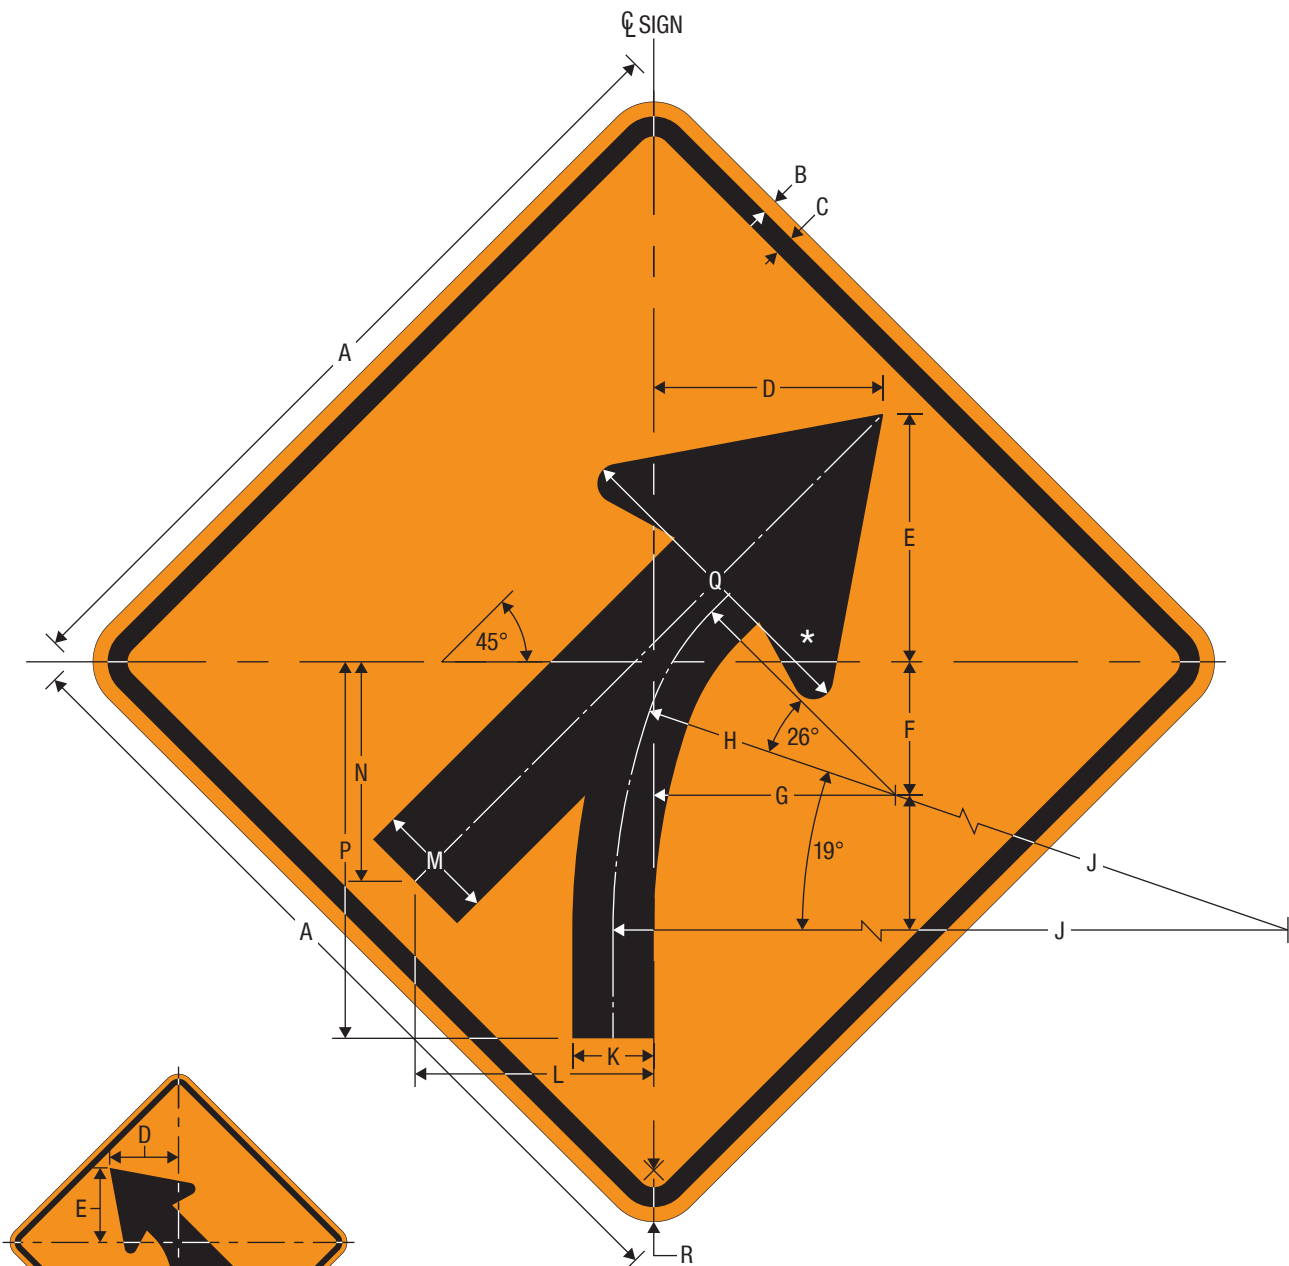

CW4-5R
Entering Roadway Merge

CW4-5L

*See Section 11 for arrow design.

A	B	C	D	E	F	G	H
36	0.625	0.875	10.051	10.875	5.847	10.598	11.391
48	0.75	1.25	13.401	14.5	7.796	14.130	15.188

J	K	L	M	N	P	Q	R
29.531	3.563	10.443	5.203	9.619	16.5	13.875	2.25
39.375	4.75	13.924	6.938	12.826	22	18.5	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE




CW4-5aP
NO MERGE AREA (Plaque)

*Reduce Spacing 20%.

A	B	C	D	E	F	G	H	J	K	L	M	N	P
18	24	0.375	0.625	3.5	4C	2.5	4C*	2.701	2.701	6.787	5.502	5.502	1.5
24	30	0.375	0.625	4.25	5C	3.25	5C	3.377	3.376	8.854	6.878	6.877	1.5

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

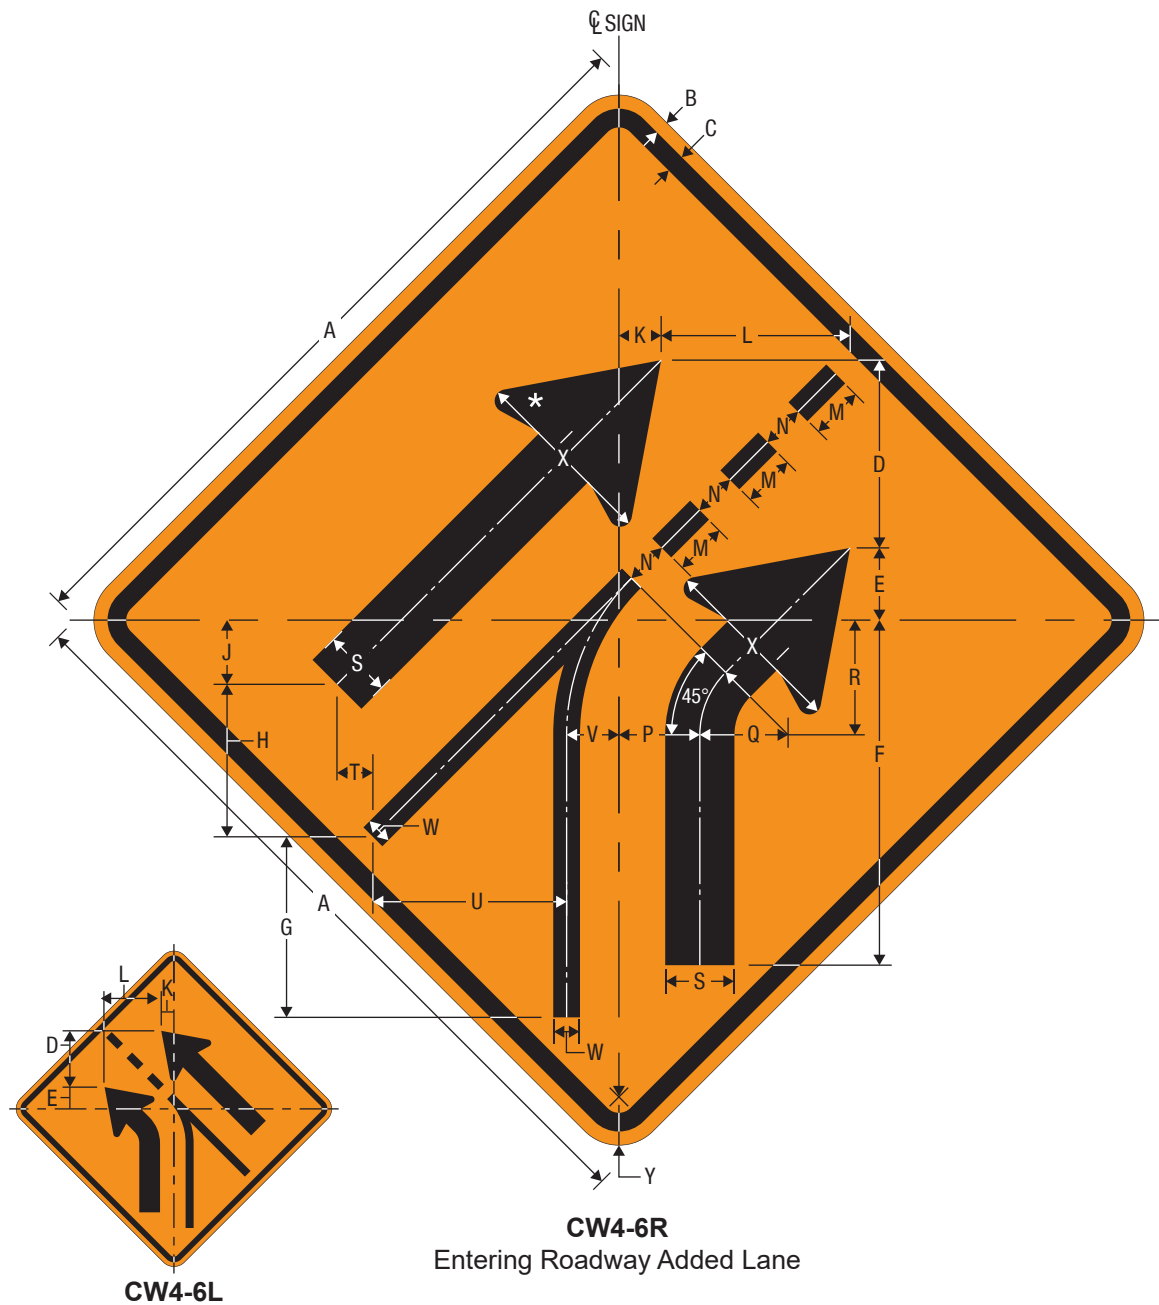

*See Section 11 for arrow design.

A	B	C	D	E	F	G	H	J	K	L	M
30	0.5	0.75	7.312	2.813	13.438	7.031	5.938	2.5	1.645	7.361	2.083
36	0.625	0.875	8.774	3.375	16.125	8.438	7.125	3	1.974	8.833	2.5
48	0.75	1.25	11.699	4.5	21.5	11.25	9.5	4	2.632	11.777	3.333

N	P	Q	R	S	T	U	V	W	X	Y
1.667	3.150	3.438	4.467	2.695	1.399	7.544	2.037	1.041	7.188	1.875
2	3.780	4.125	5.360	3.234	1.678	9.052	2.445	1.249	8.625	2.25
2.667	5.041	5.5	7.146	4.313	2.238	12.070	3.259	1.666	11.5	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW5-1
ROAD NARROWS

A	B	C	D	E	F	G	H	J	K	L	M
30	0.5	0.75	5D	3	1.75	3.25	8.382	8.381	15.012	15.011	1.875
36	0.625	0.875	6D	3.5	2	4	10.058	10.057	18.014	18.013	2.25
48	0.75	1.25	8D	4	3	5	13.410	13.410	24.018	24.018	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



*Reduce Spacing 20%.

	A	B	C	D	E	F	G	H	J	K
	18	0.375	0.625	3D*	0.375	1.125	7.641	7.640	6.455	1.5
	30	0.5	0.75	5D*	0.5	2	12.735	12.734	10.758	1.875
	36	0.625	0.875	6D*	0.75	2.25	15.282	15.281	12.910	2.25
	48	0.75	1.25	8D*	0.5	3.5	20.375	20.375	17.213	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW5-2a
NARROW UNDERPASS

*Reduce Spacing 30%.

A	B	C	D	E	F	G	H	J	K	L
30	0.5	0.75	5C*	2.5	0.625	4.375	10.440	10.439	14.973	1.875
36	0.625	0.875	6C*	3	0.75	5.25	12.528	12.527	17.968	2.25
48	0.75	1.25	8C*	4	1	7	16.703	16.703	23.957	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW5-3
ONE LANE BRIDGE

A	B	C	D	E	F	G	H	J
30	0.5	0.75	5 C	3.25	10.404	13.205	9.578	1.875
36	0.625	0.875	6 C	4	12.485	15.846	11.494	2.25
48	0.75	1.25	8 C	5	16.646	21.128	15.325	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW5-3a
ONE LANE UNDERPASS

*Reduce Spacing 20%.

A	B	C	D	E	F	G	H	J	K	L	M	N
30	0.5	0.75	4D	2	0.5	4D*	9.886	3	12.887	14.520	14.520	1.875
36	0.625	0.875	5C	2.5	0.5	5C	10.404	3.75	13.205	15.956	15.955	2.25
48	0.75	1.25	7C	3.25	0.75	7C	14.565	5	18.487	22.338	22.338	3


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW5-4
RAMP NARROWS

A	B	C	D	E	F	G	H	J	K	L	M
30	0.5	0.75	5D	2.75	1.25	3.75	8.657	8.656	15.012	15.011	1.875
36	0.625	0.875	6D	3.25	1.75	4.25	10.388	10.387	18.014	18.013	2.25
48	0.75	1.25	8D	4.25	2.25	5.75	13.850	13.850	24.018	24.018	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

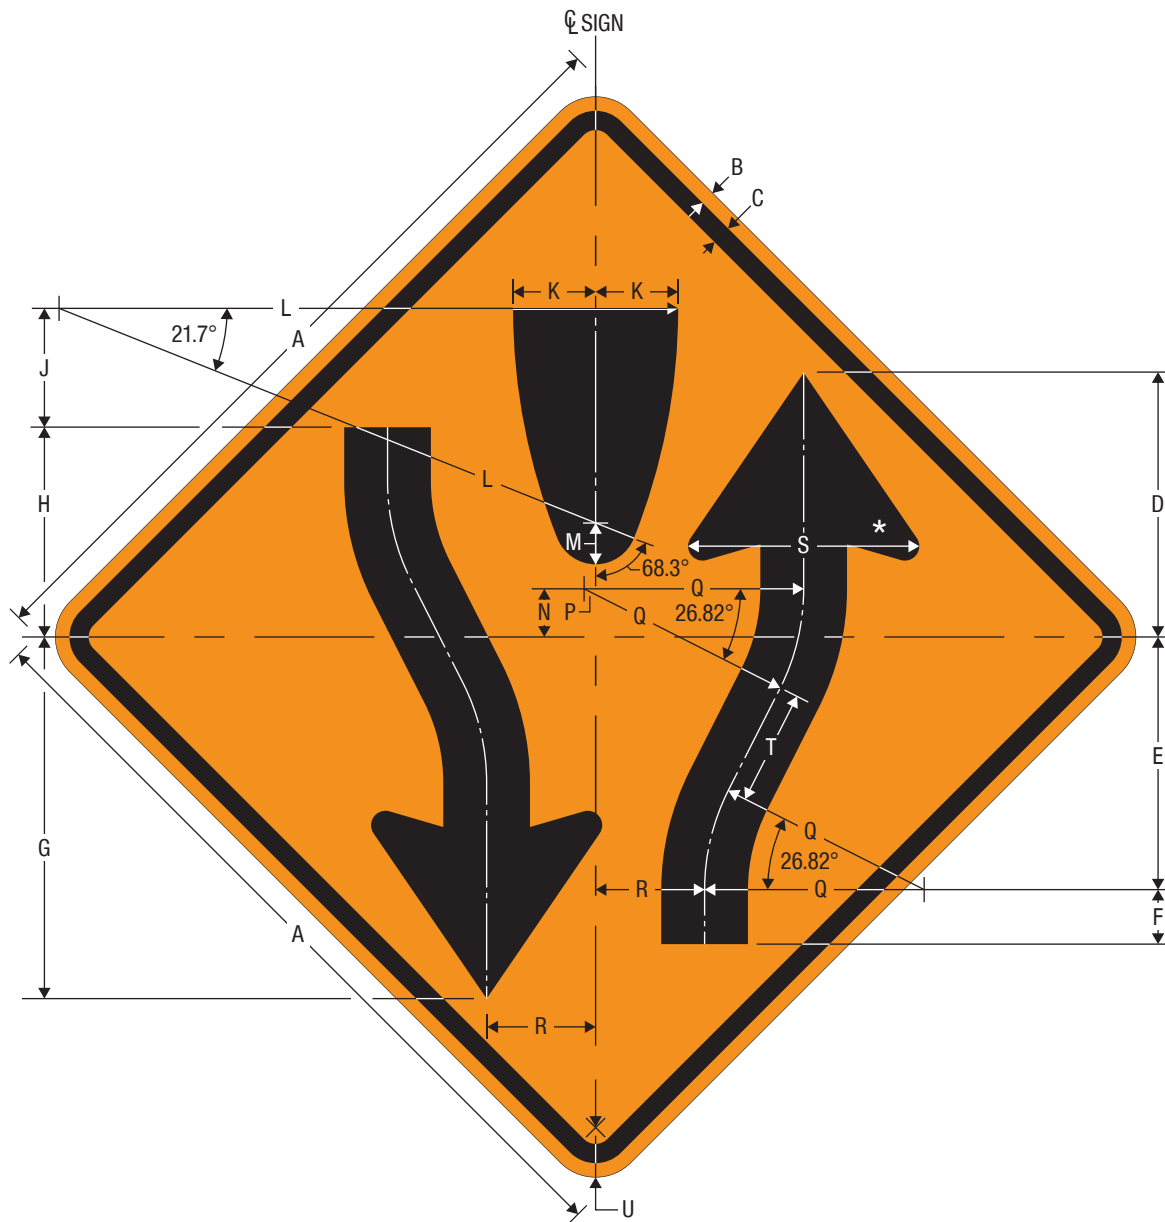


CW6-1
Divided Highway

*See Section 11 for arrow design.

A	B	C	D	E	F	G	H	J	K
30	0.5	0.75	10	9.562	2.063	13.687	7.938	4.500	3.125
36	0.625	0.875	12	11.450	2.5	16.425	9.525	5.400	3.75
48	0.75	1.25	16	15.299	3.301	21.900	12.700	7.200	5

L	M	N	P	Q	R	S	T	U
23.438	1.563	1.818	0.438	8.313	4.125	8.75	4.346	1.875
28.125	1.875	2.182	0.525	9.975	4.950	10.5	5.215	2.25
37.5	2.5	2.909	0.700	13.300	6.600	14	6.953	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

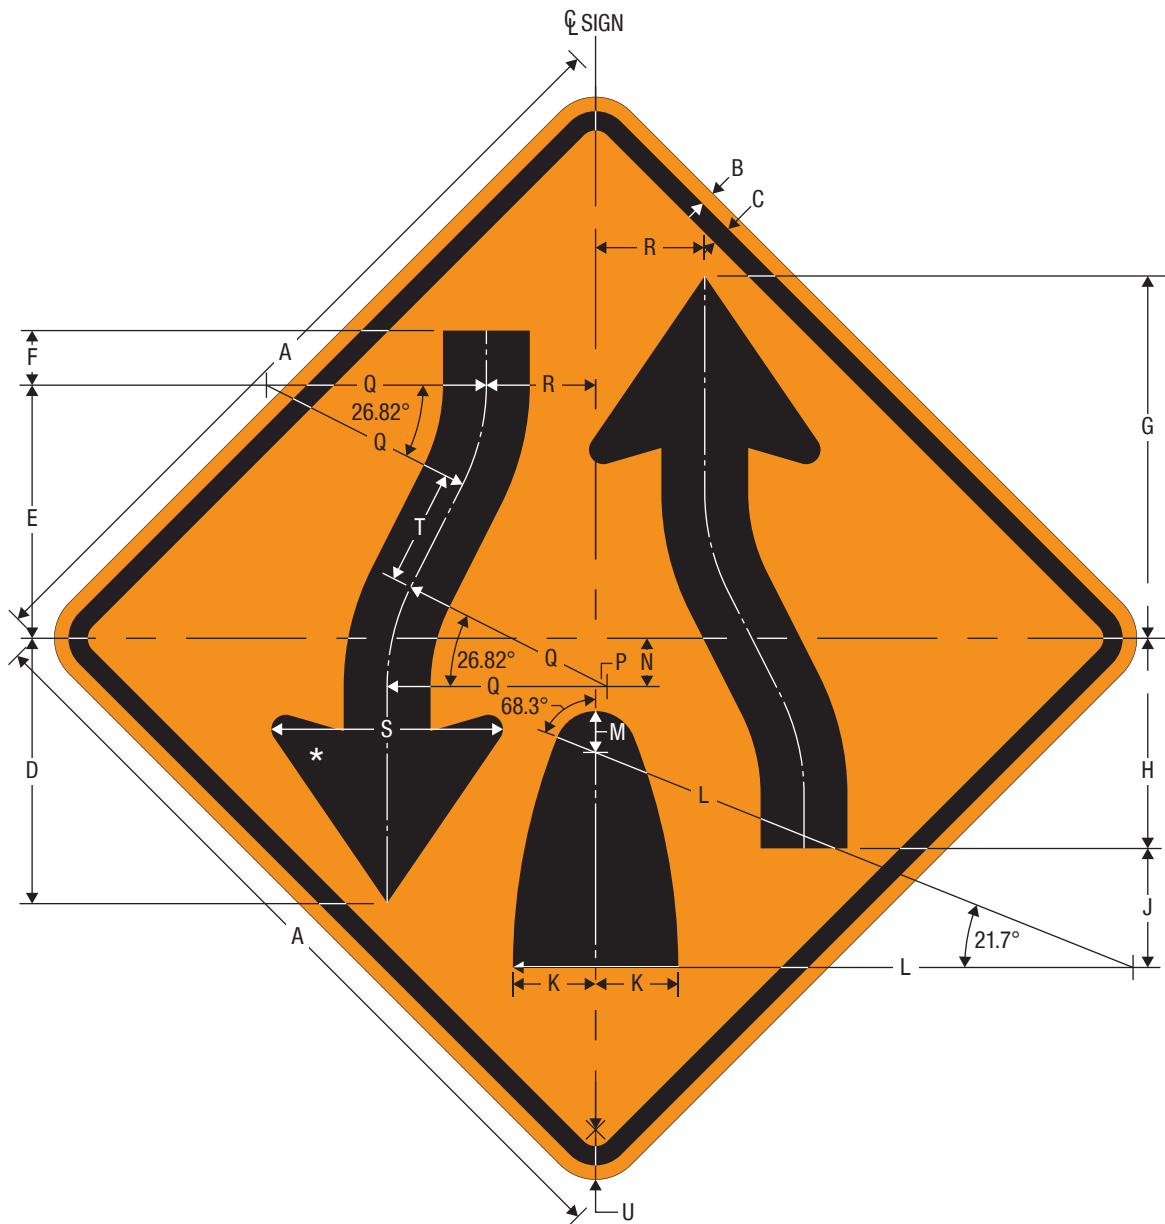


CW6-2
Divided Highway Ends

*See Section 11 for arrow design.

A	B	C	D	E	F	G	H	J	K
30	0.5	0.75	10	9.562	2.063	13.687	7.938	4.500	3.125
36	0.625	0.875	12	11.450	2.5	16.425	9.525	5.400	3.75
48	0.75	1.25	16	15.299	3.301	21.900	12.700	7.200	5

L	M	N	P	Q	R	S	T	U
23.438	1.563	1.818	0.438	8.313	4.125	8.75	4.346	1.875
28.125	1.875	2.182	0.525	9.975	4.950	10.5	5.215	2.25
37.5	2.5	2.909	0.700	13.300	6.600	14	6.953	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

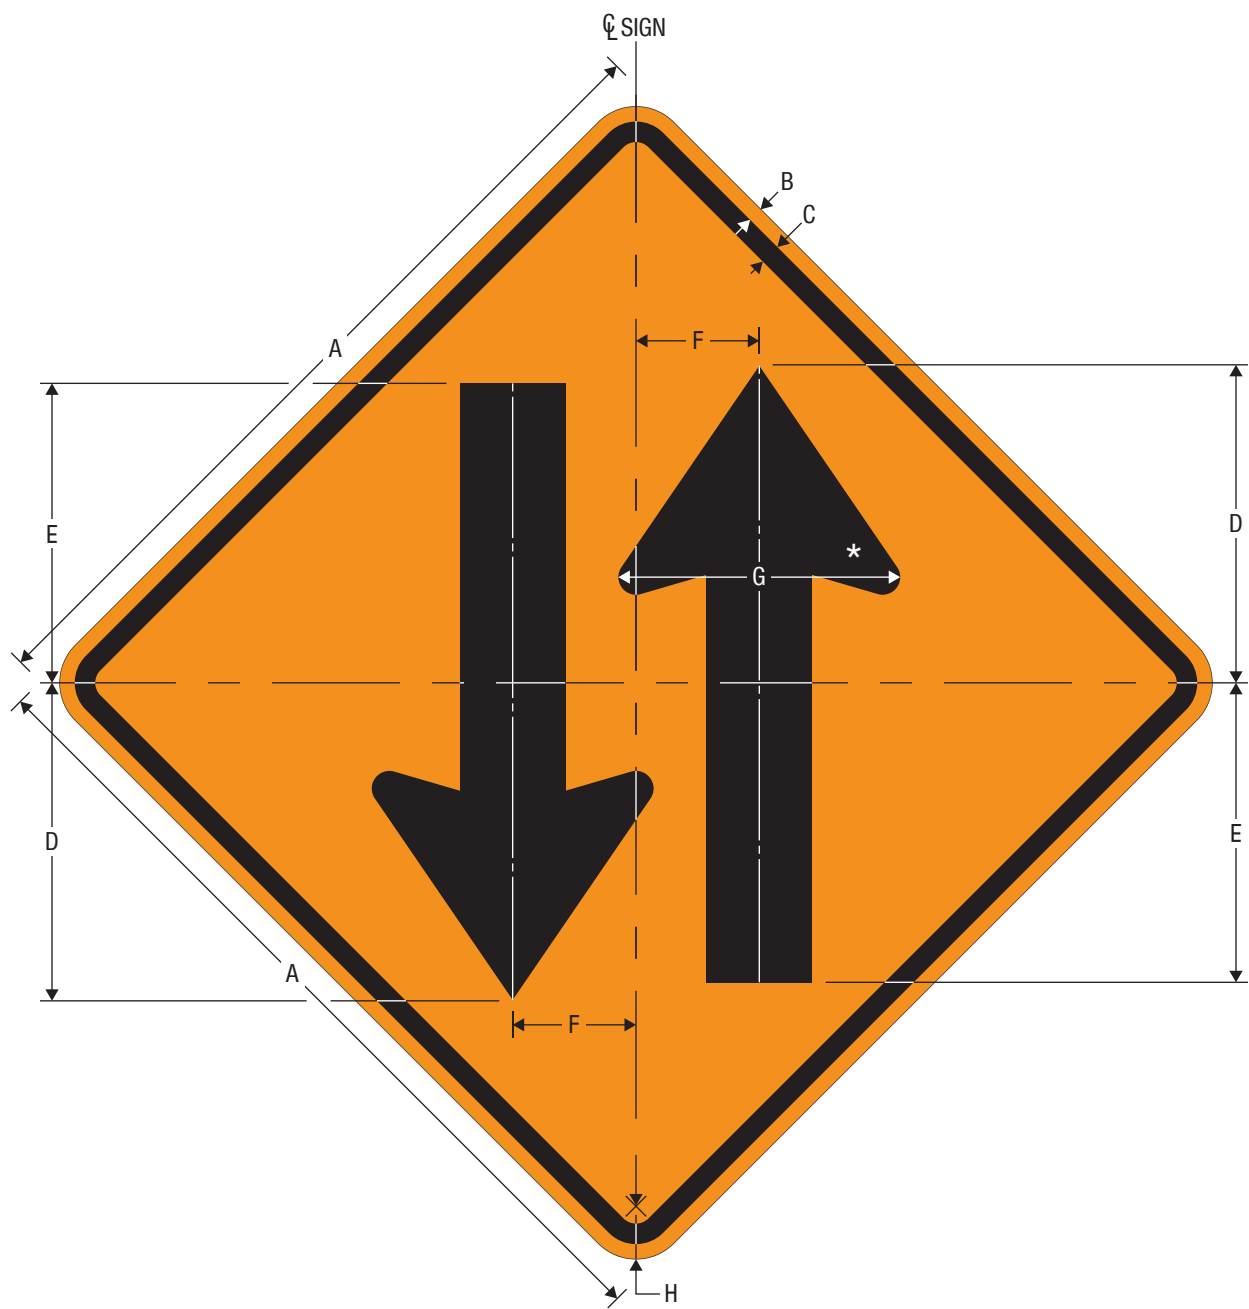


CW6-3
Two-Way Traffic

*See Section 11 for arrow design.

A	B	C	D	E	F	G	H
30	0.5	0.75	11.25	10.625	4.375	10	1.875
36	0.625	0.875	13.5	12.75	5.25	12	2.25
48	0.75	1.25	18	17	7	16	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

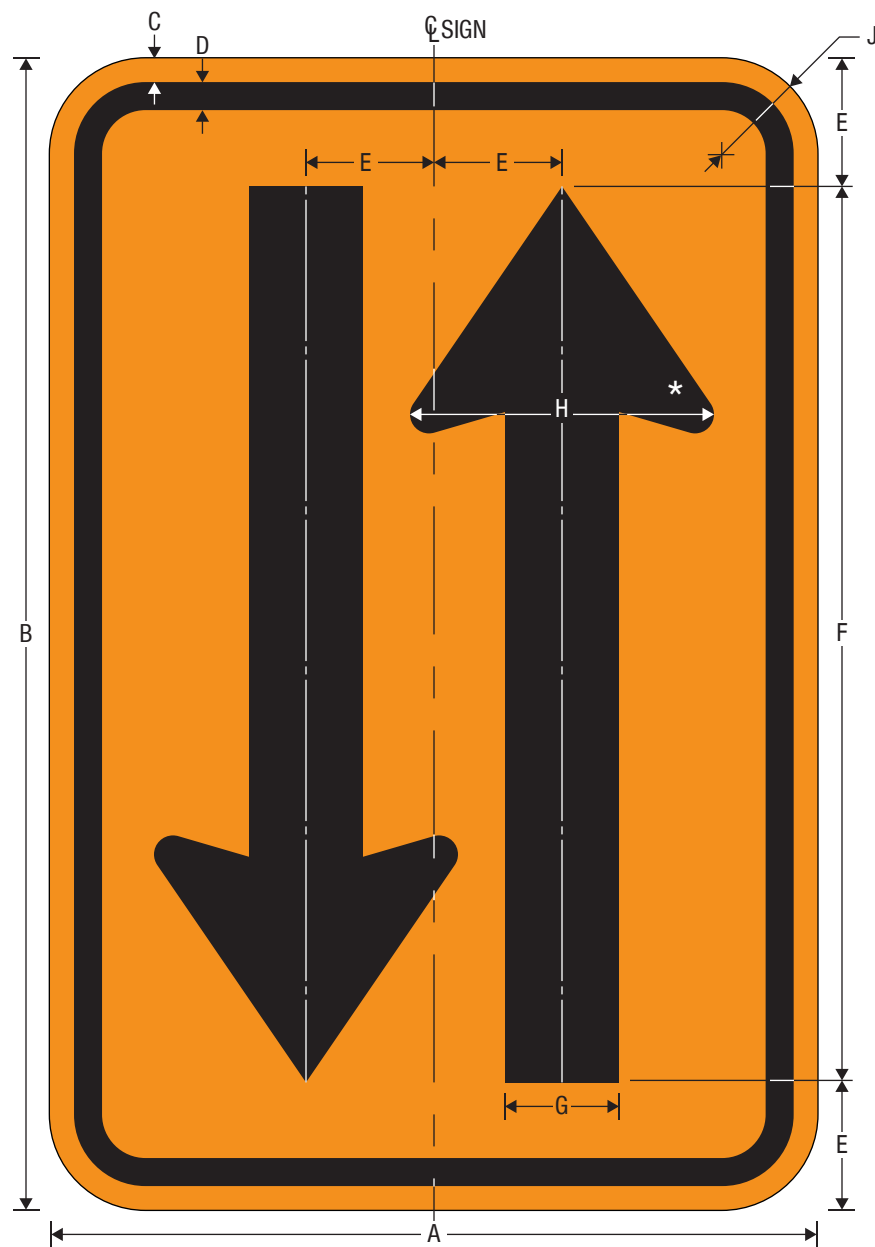


CW6-4
Narrow Two-Way Traffic

*See Section 11 for arrow design.

A	B	C	D	E	F	G	H	J
12	18	0.375	0.438	2	14	1.781	4.75	1.5


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

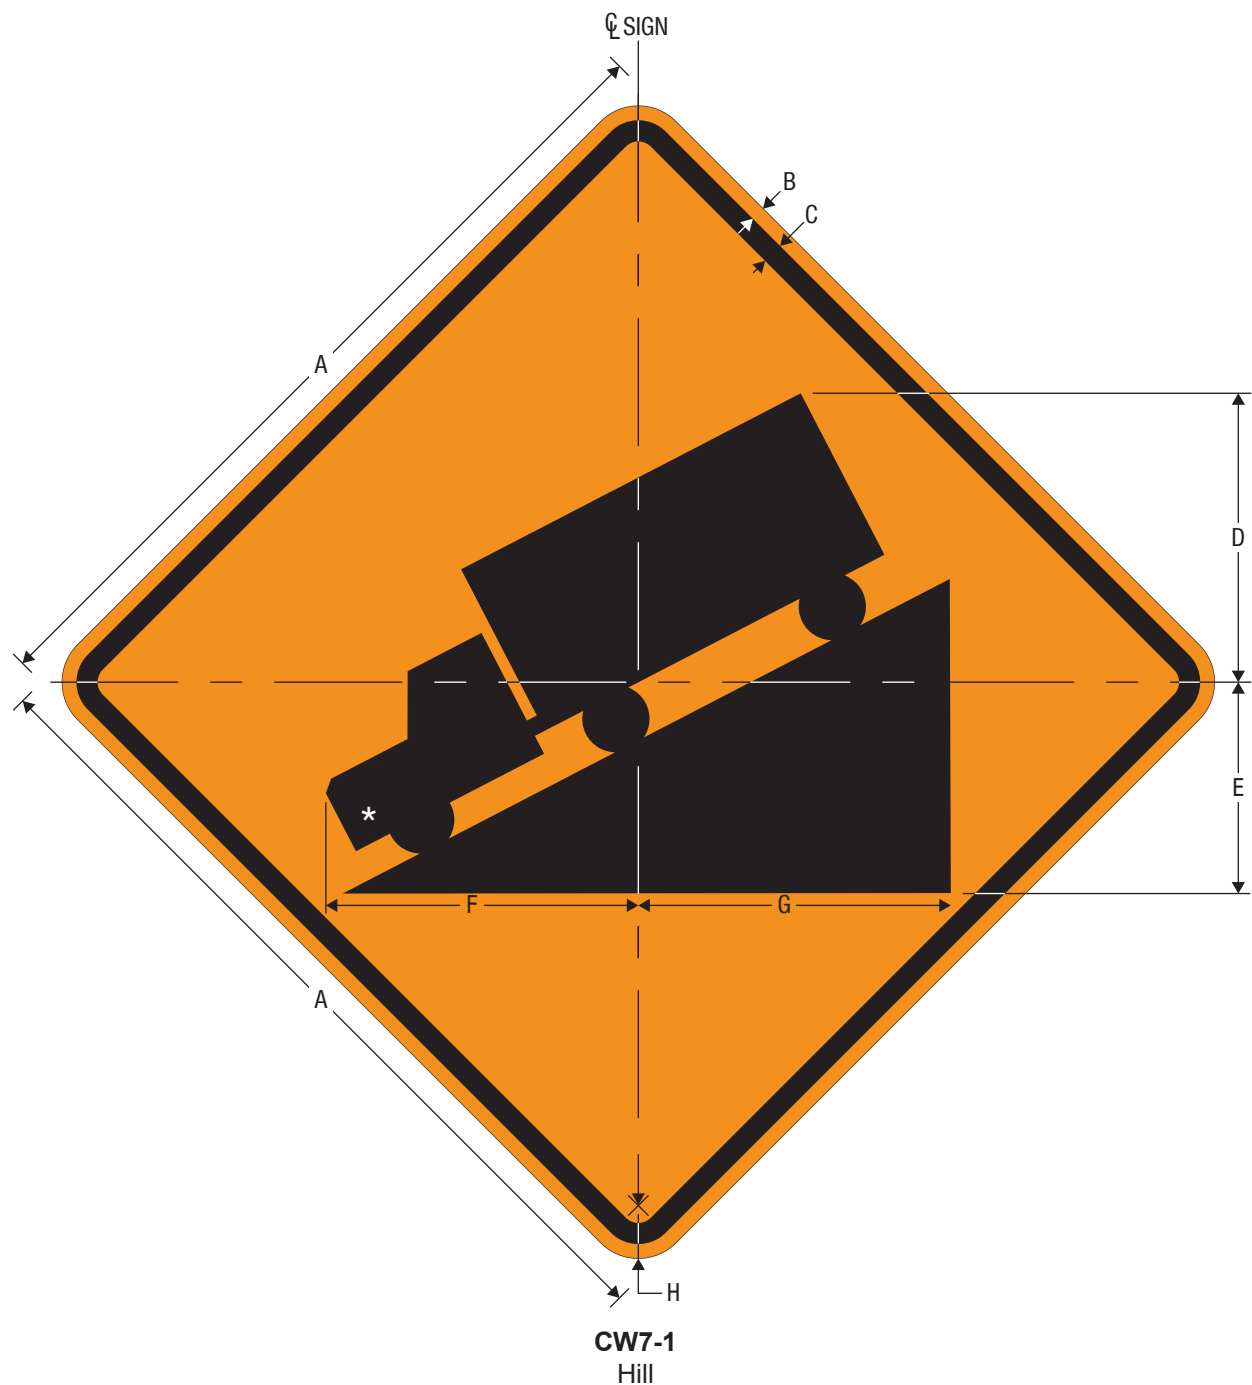

*See Section 11 for symbol design.

A	B	C	D	E	F	G	H
24	0.375	0.625	8	6	8.745	8.744	1.5
30	0.5	0.75	10.25	7.5	11.087	11.087	1.875
36	0.625	0.875	12.25	9	13.273	13.273	2.25
48	0.75	1.25	16	12	17.489	17.489	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

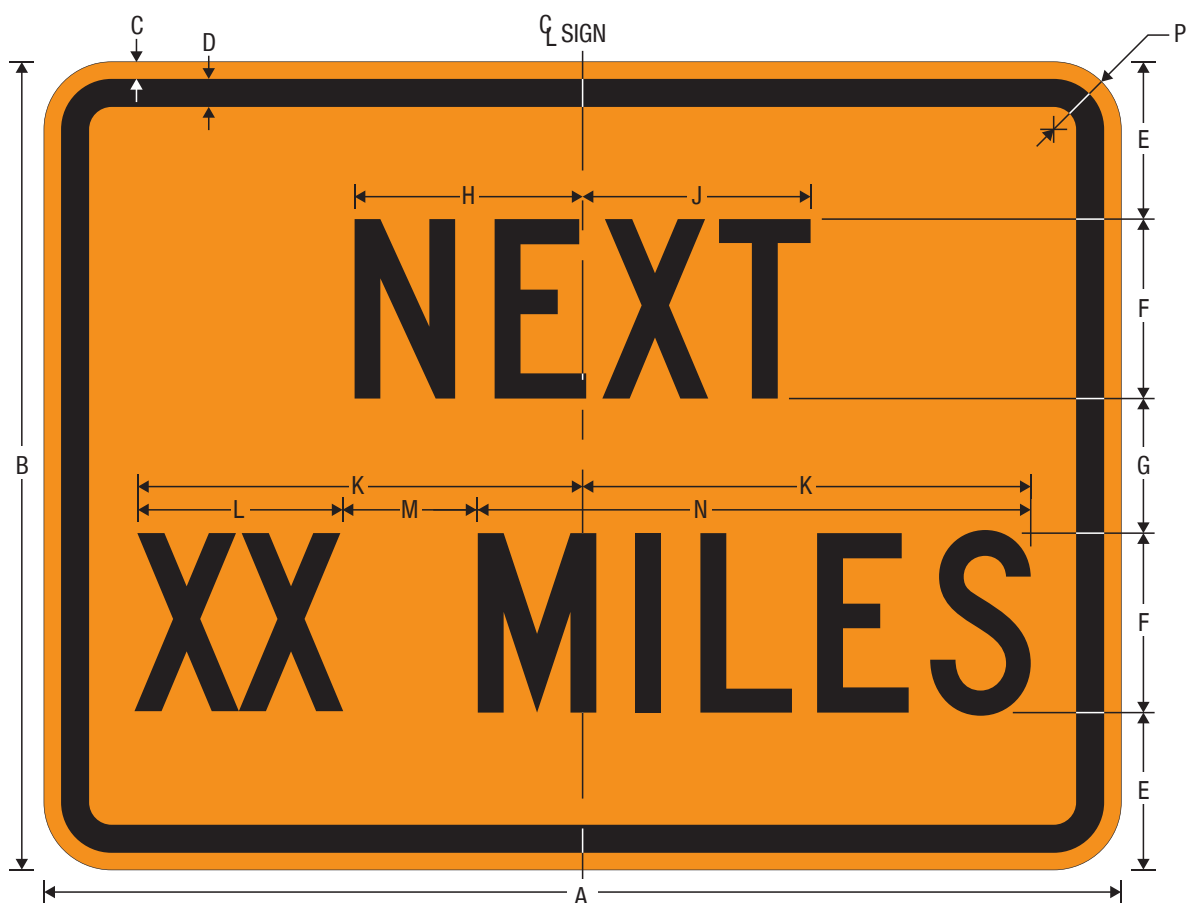


CW7-3aP
NEXT XX MILES (Plaque)

A	B	C	D	E	F	G
24	18	0.375	0.625	3.5	4C	3
30	24	0.375	0.625	5	6C	4
36	30	0.5	0.75	6.5	7C	5


H	J	K	L	M	N	P
5.082	5.082	VAR	VAR	3	12.325	1.5
6.353	6.352	VAR	VAR	4	15.406	1.5
7.623	7.623	VAR	VAR	5	18.488	1.875

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

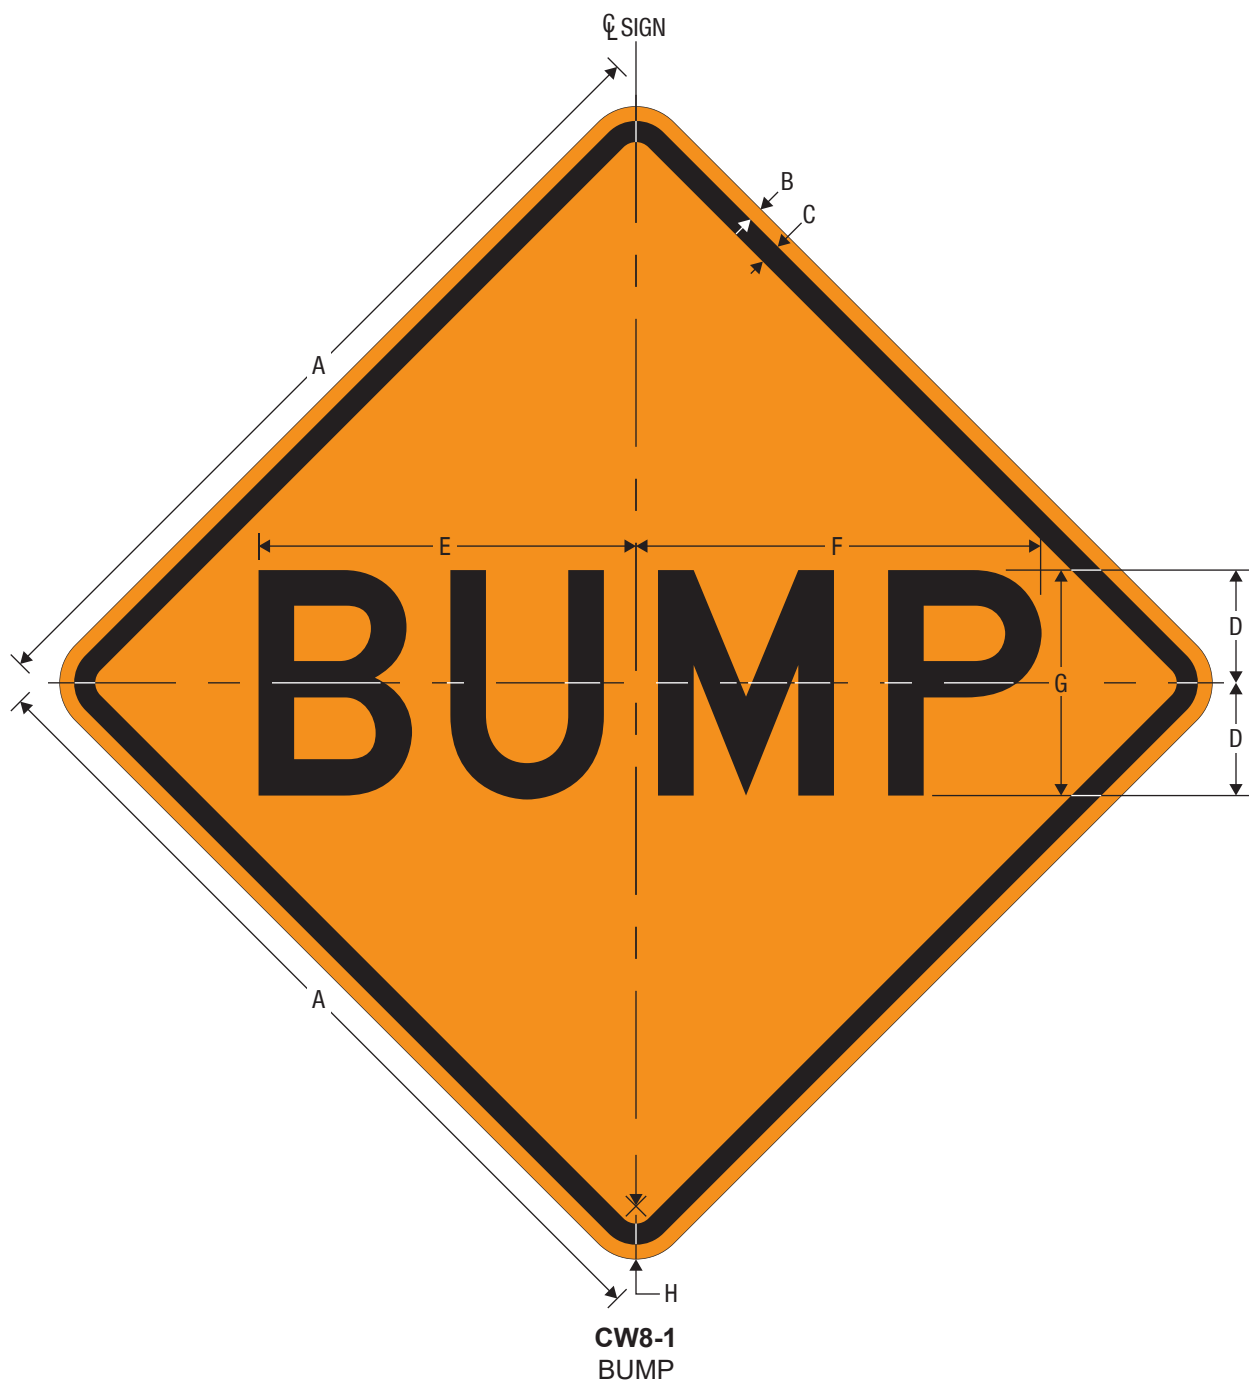

A	B	C	D	E	F	G	H
18	0.375	0.625	2	6.821	7.070	4D	1.5
24	0.375	0.625	3	10.169	10.668	6D	1.5
30	0.5	0.75	4	13.391	14.391	8D	1.875
36	0.625	0.875	5	16.614	18.114	10D	2.25
48	0.75	1.25	6	20.087	21.586	12D	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

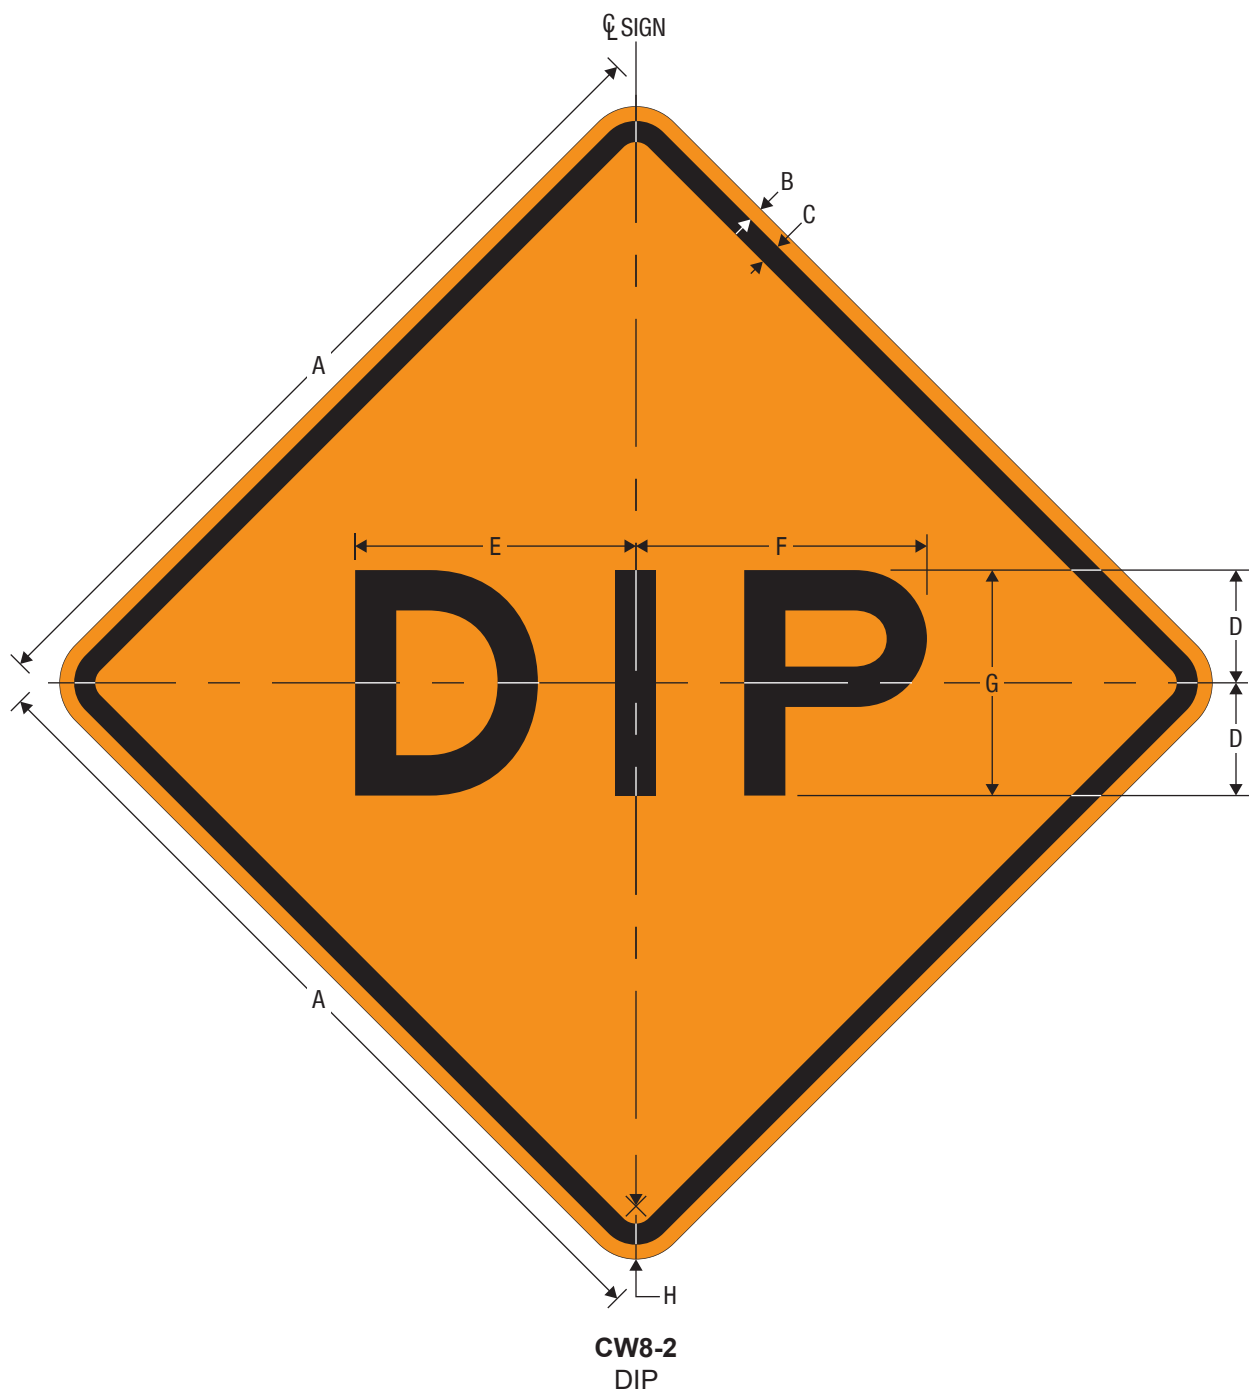

*Increase spacing 50%.

	A	B	C	D	E	F	G	H
	18	0.375	0.625	2.5	6.215	6.465	5E*	1.5
	24	0.375	0.625	3	7.483	7.733	6E*	1.5
	30	0.5	0.75	4	10.019	10.269	8E*	1.875
	36	0.625	0.875	5	12.430	12.930	10E*	2.25
	48	0.75	1.25	6	14.966	15.466	12E*	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE




CW8-3
PAVEMENT ENDS



A	B	C	D	E	F	G	H	J	K	L	M
18	0.375	0.625	2.5	0.5	1.75	3C	8.389	8.388	4.097	4.096	1.5
30	0.5	0.75	4.25	0.75	3	5C	13.981	13.980	6.828	6.827	1.875
36	0.625	0.875	5	1	3.5	6C	16.777	16.777	8.193	8.193	2.25
48	0.75	1.25	7	1	5	8C	22.369	22.369	10.924	10.924	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

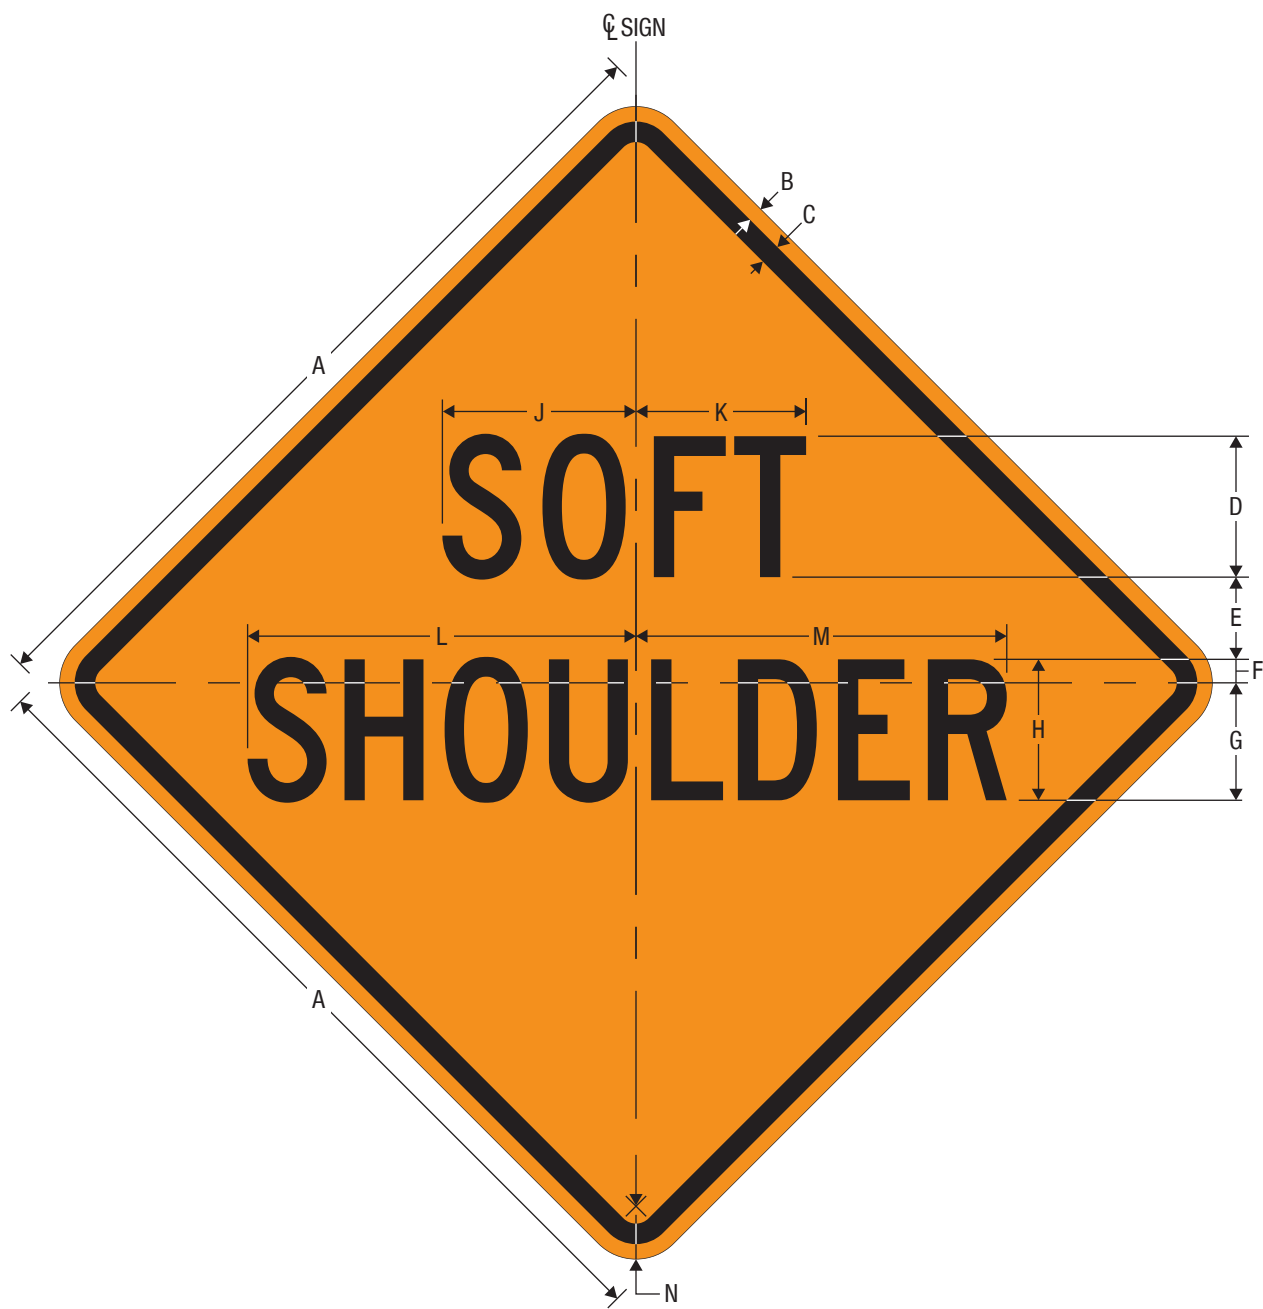


CW8-4
SOFT SHOULDER

*Reduce Spacing 25%.

A	B	C	D	E	F	G	H	J	K	L	M	N
24	0.375	0.625	4C	2.5	0.5	3.5	4C*	5.537	4.787	11.024	10.524	1.5
30	0.5	0.75	5C	3	0.75	4.25	5C*	6.890	6.015	13.780	13.155	1.875
36	0.625	0.875	6C	3.5	1	5	6C*	8.243	7.243	16.536	15.786	2.25
48	0.75	1.25	8C	5	1.25	6.75	8C*	10.949	9.699	22.048	21.048	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

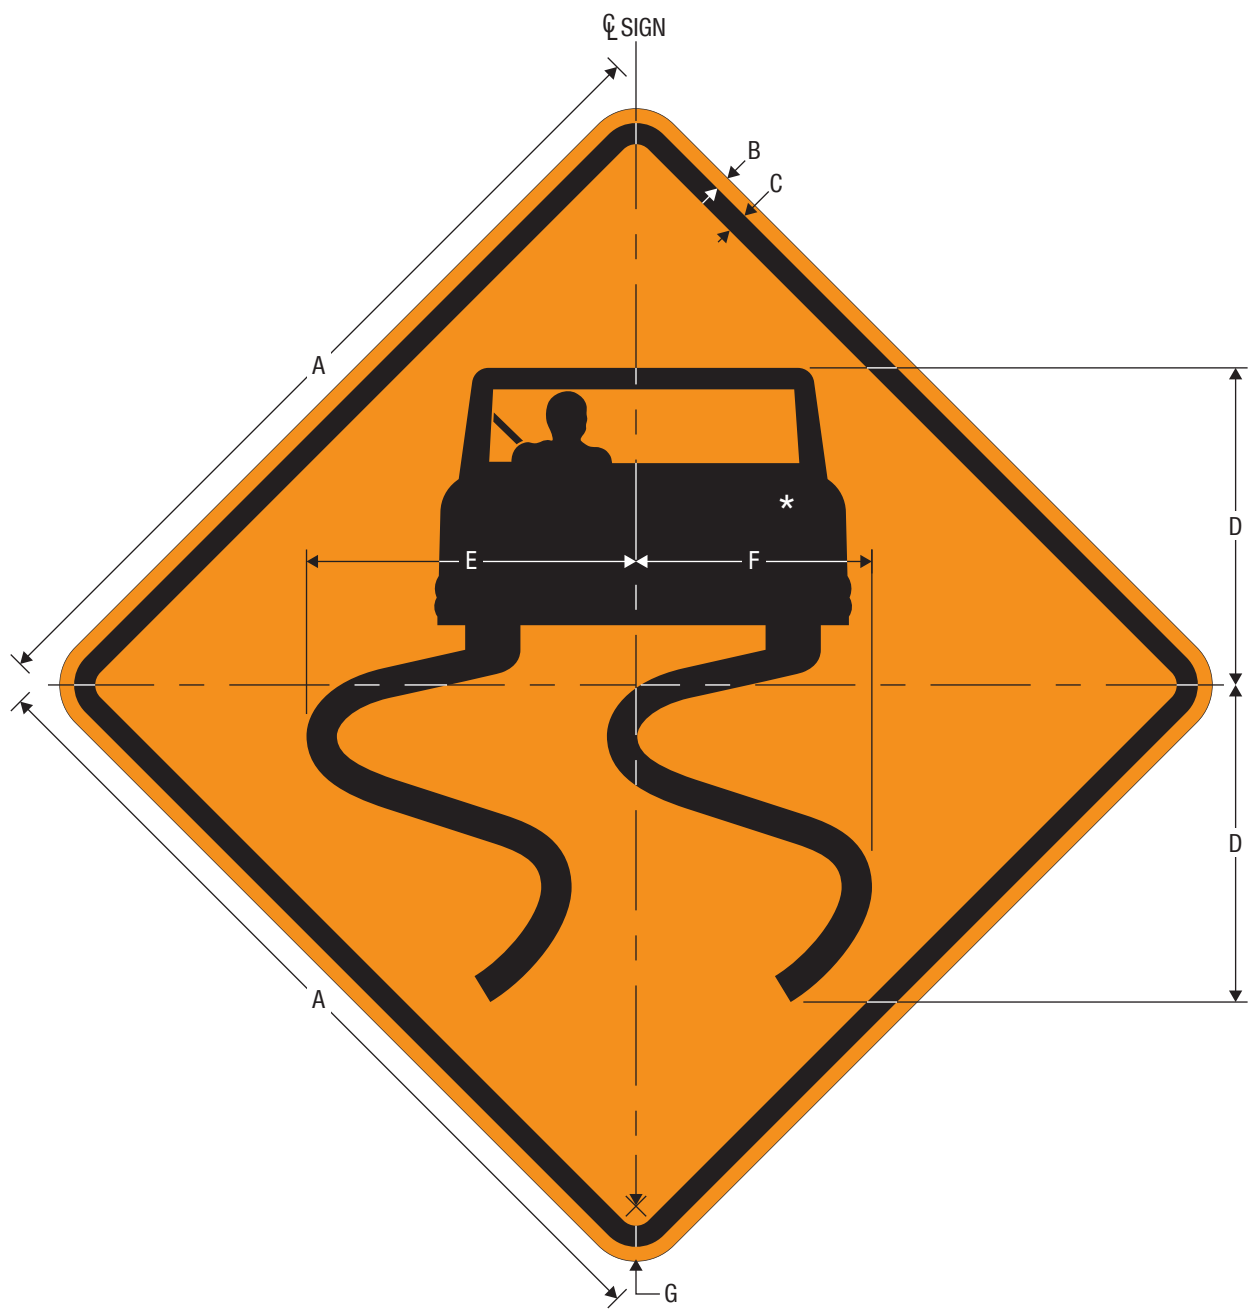


CW8-5
Slippery When Wet

*See Section 11 for symbol design.

A	B	C	D	E	F	G
30	0.5	0.75	11.25	11.690	8.373	1.875
36	0.625	0.875	13.5	14.028	10.048	2.25
48	0.75	1.25	18	18.704	13.397	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

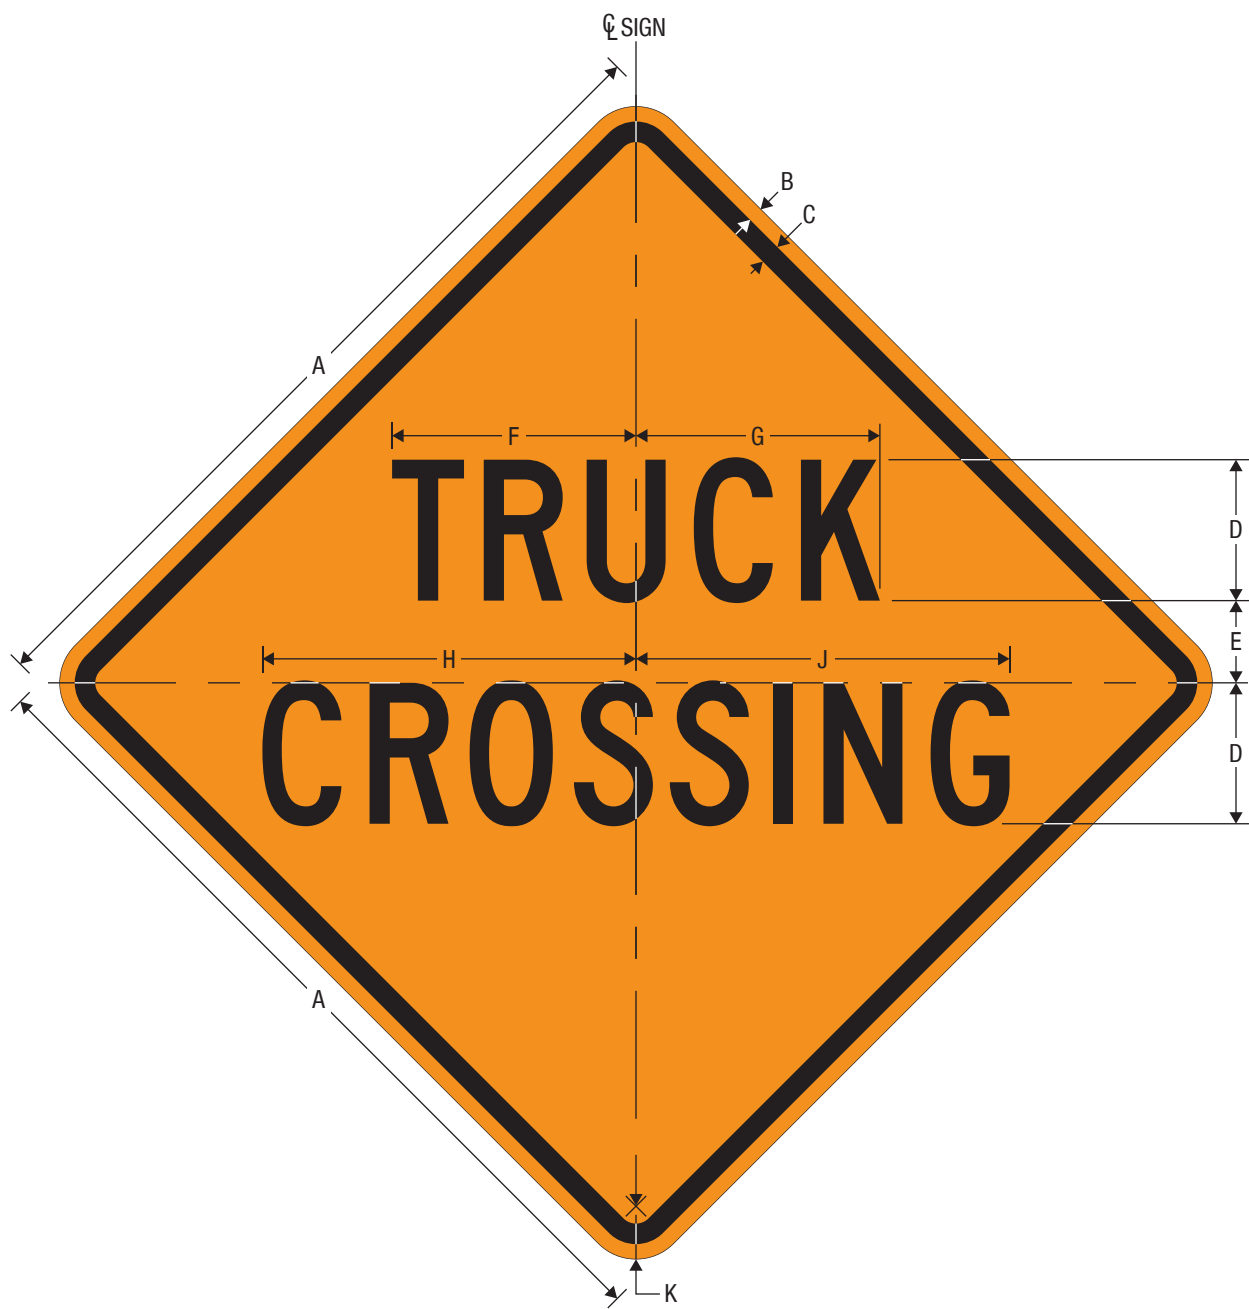

CW8-6
TRUCK CROSSING

A	B	C	D	E	F	G	H	J	K
24	0.375	0.625	4C	2.5	6.923	6.922	10.604	10.603	1.5
30	0.5	0.75	5C	3	8.653	8.653	13.255	13.254	1.875
36	0.625	0.875	6C	3.5	10.384	10.384	15.906	15.905	2.25
48	0.75	1.25	8C	5	13.845	13.845	21.207	21.207	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW8-7
LOOSE GRAVEL

A	B	C	D	E	F	G	H	J	K	L	M
24	0.375	0.625	4D	2.25	0.5	4D	7.465	7.464	8.954	8.954	1.5
30	0.5	0.75	5D	2.875	0.625	5D	9.331	9.330	12.233	12.232	1.875
36	0.625	0.875	6D	3.375	0.75	6D	11.197	11.196	14.679	14.679	2.25
48	0.75	1.25	8D*	4.5	1	8D	14.929	14.929	19.572	19.572	3


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW8-8
ROUGH ROAD

A	B	C	D	E	F	G	H	J	K	L
24	0.375	0.625	4D	0.75	2.25	8.487	8.487	6.705	6.705	1.5
36	0.625	0.875	6D	1	4	12.7317	12.730	10.058	10.057	2.25
48	0.75	1.25	8D	1.5	4.5	16.974	16.974	13.410	13.410	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

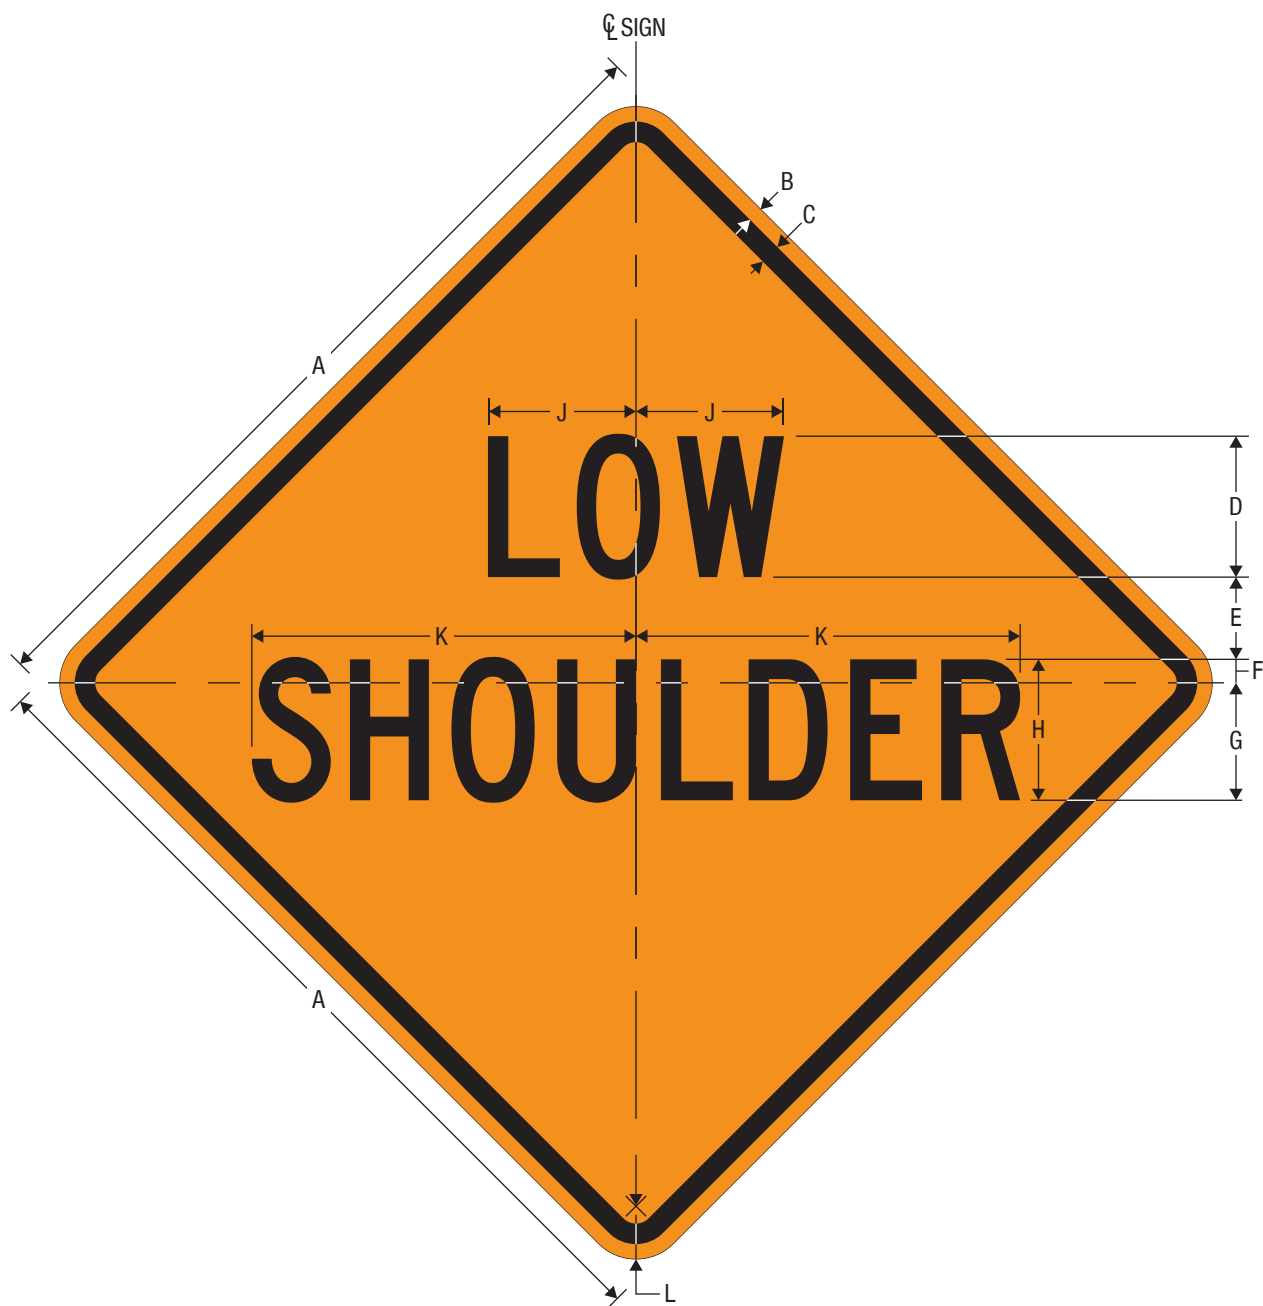

CW8-9
LOW SHOULDER

*Reduce spacing 20%.

A	B	C	D	E	F	G	H	J	K	L
24	0.375	0.625	4C	2.25	0.5	3.5	4C*	4.202	10.904	1.5
36	0.625	0.875	6C	3.5	1	5	6C*	6.303	16.356	2.25
48	0.75	1.25	8C	5	1.25	6.75	8C*	8.404	21.808	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW8-11
UNEVEN LANES

A	B	C	D	E	F	G	H	J	K
30	0.5	0.75	5D	0.75	3	12.308	10.007	10.006	1.875
36	0.625	0.875	6D	1	3.5	14.770	12.008	12.007	2.25
48	0.75	1.25	8D	1.25	4.75	19.693	16.010	16.010	3


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW8-12
NO CENTER LINE

A	B	C	D	E	F	G	H	J	K	L	M	N
30	0.5	0.75	5D	3.75	3.5	1.5	4.028	4.028	11.908	11.907	6.778	1.875
36	0.625	0.875	6D	4.5	4	2	4.834	4.833	14.289	14.289	8.134	2.25
48	0.75	1.25	8D	6	5.75	2.25	6.445	6.445	19.052	19.052	10.845	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

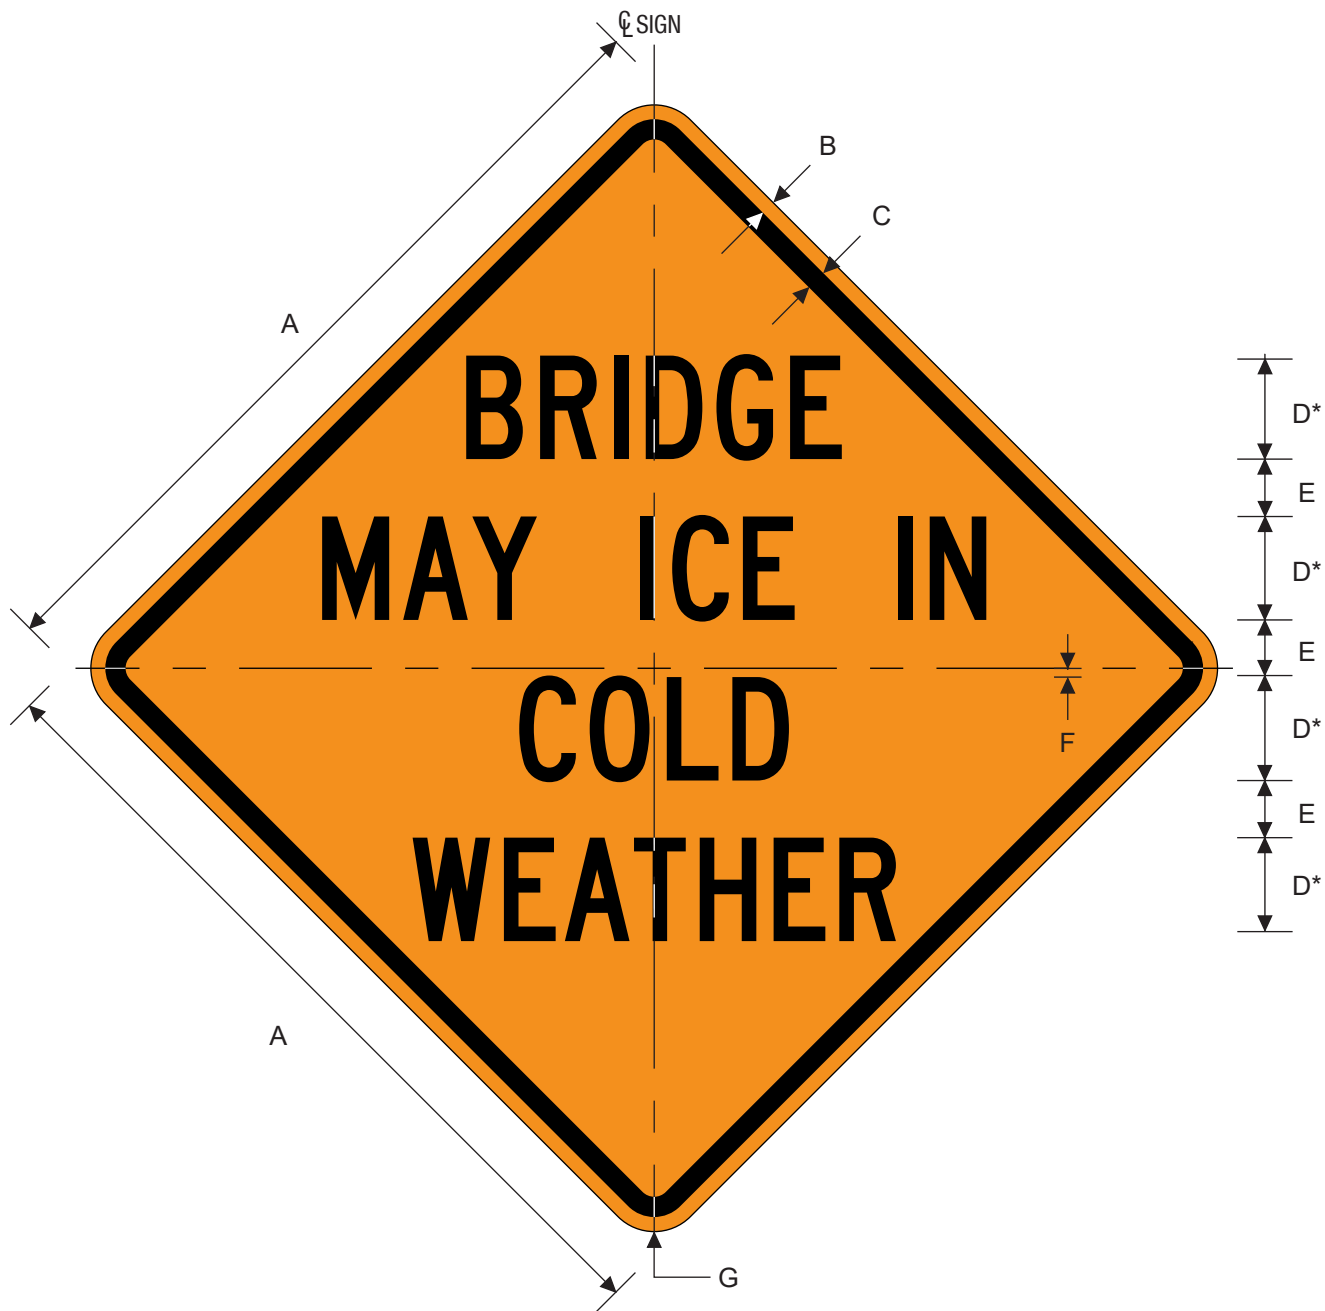

CW8-13aT
BRIDGE MAY ICE IN COLD WEATHER

*Reduce spacing 20%.

A	B	C	D	E	F	G
36	.625	.875	4.5C	2.25	.45	2.25
48	.75	1.25	6C	4	.85	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE






CW8-14
FALLEN ROCKS

A	B	C	D	E	F	G	H	J	K	L
24	0.375	0.625	4D	1	2	9.385	9.384	7.997	8.496	1.5
30	0.5	0.75	5D	1.125	2.5	11.731	11.730	10.058	10.558	1.875
36	0.625	0.875	6D	1.5	3	14.077	14.077	12.120	12.620	2.25
48	0.75	1.25	8D	2	4	18.769	18.769	15.993	16.993	3


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

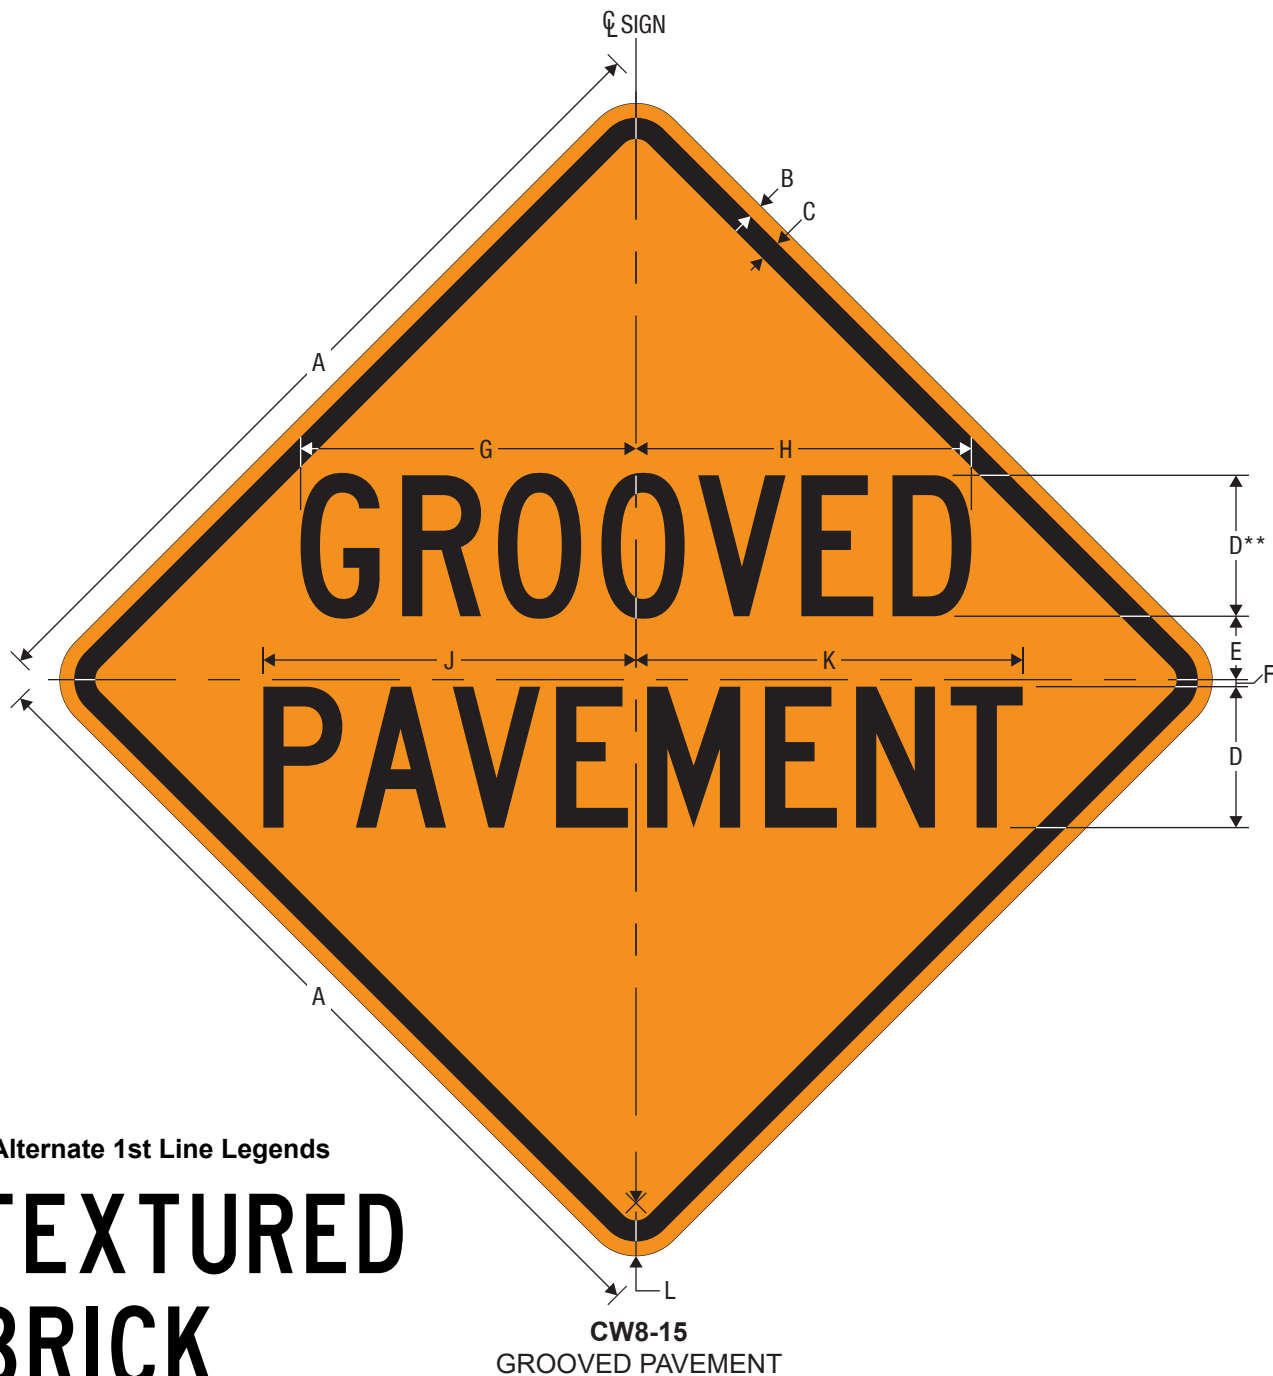

*Reduce spacing 20%.

A	B	C	D	E	F	G	H	J	K	L
24	0.375	0.625	4C*	2	0.25	9.520	9.519	10.527	11.026	1.5
30	0.5	0.75	5C*	2.5	0.25	11.900	11.899	13.221	13.720	1.875
36	0.625	0.875	6C*	3	0.375	14.280	14.279	15.665	16.665	2.25
48	0.75	1.25	8C*	4	0.5	19.039	19.039	21.053	22.053	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

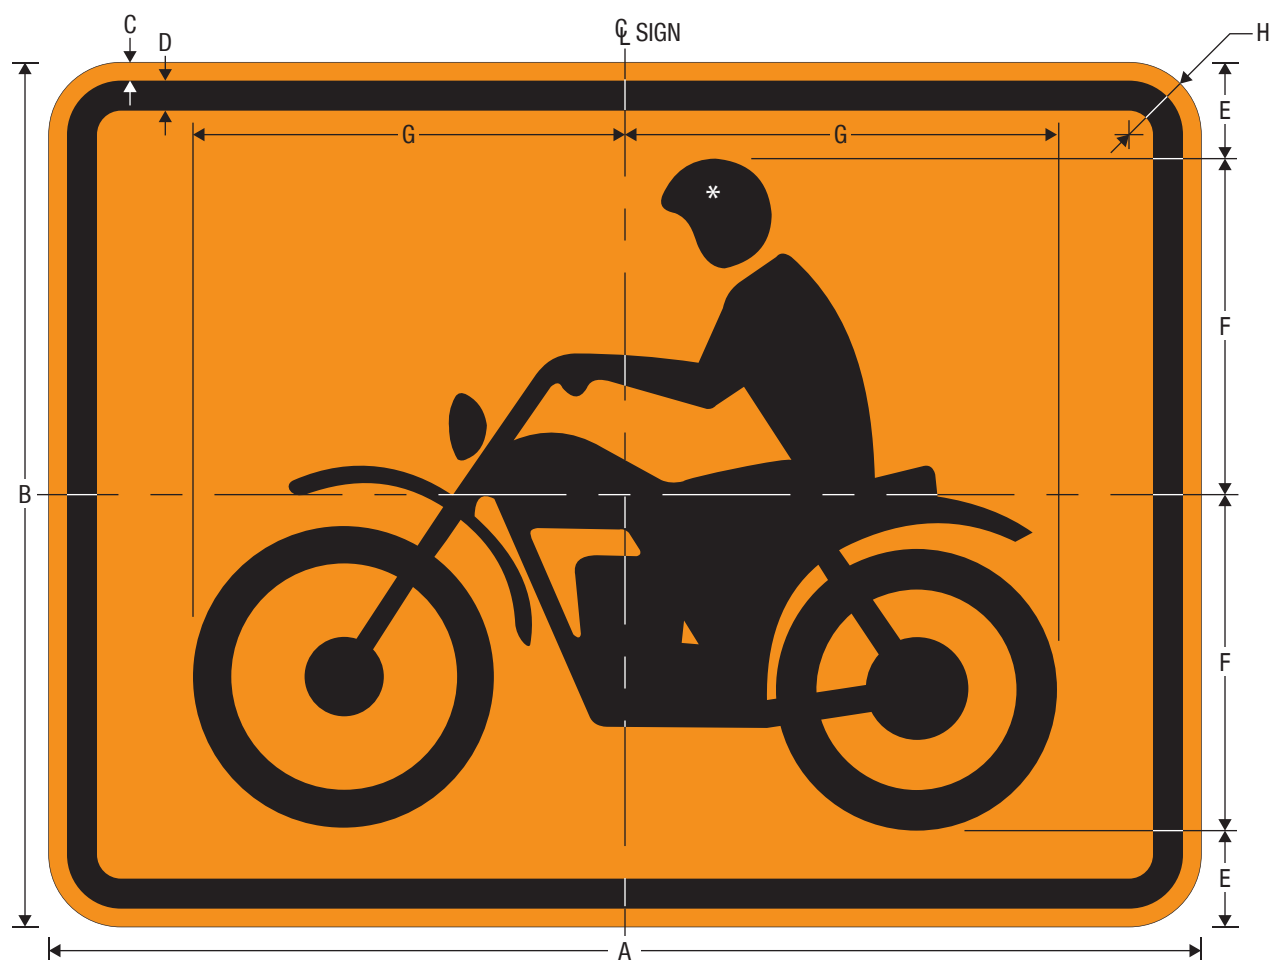


CW8-15aP
Motorcycle (Plaque)

*See Section 11 for symbol design.

A	B	C	D	E	F	G	H
24	18	0.375	0.625	2	7	9	1.5
30	24	0.375	0.625	3.25	8.75	11.25	1.5
36	30	0.5	0.75	4.5	10.5	13.5	1.875


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

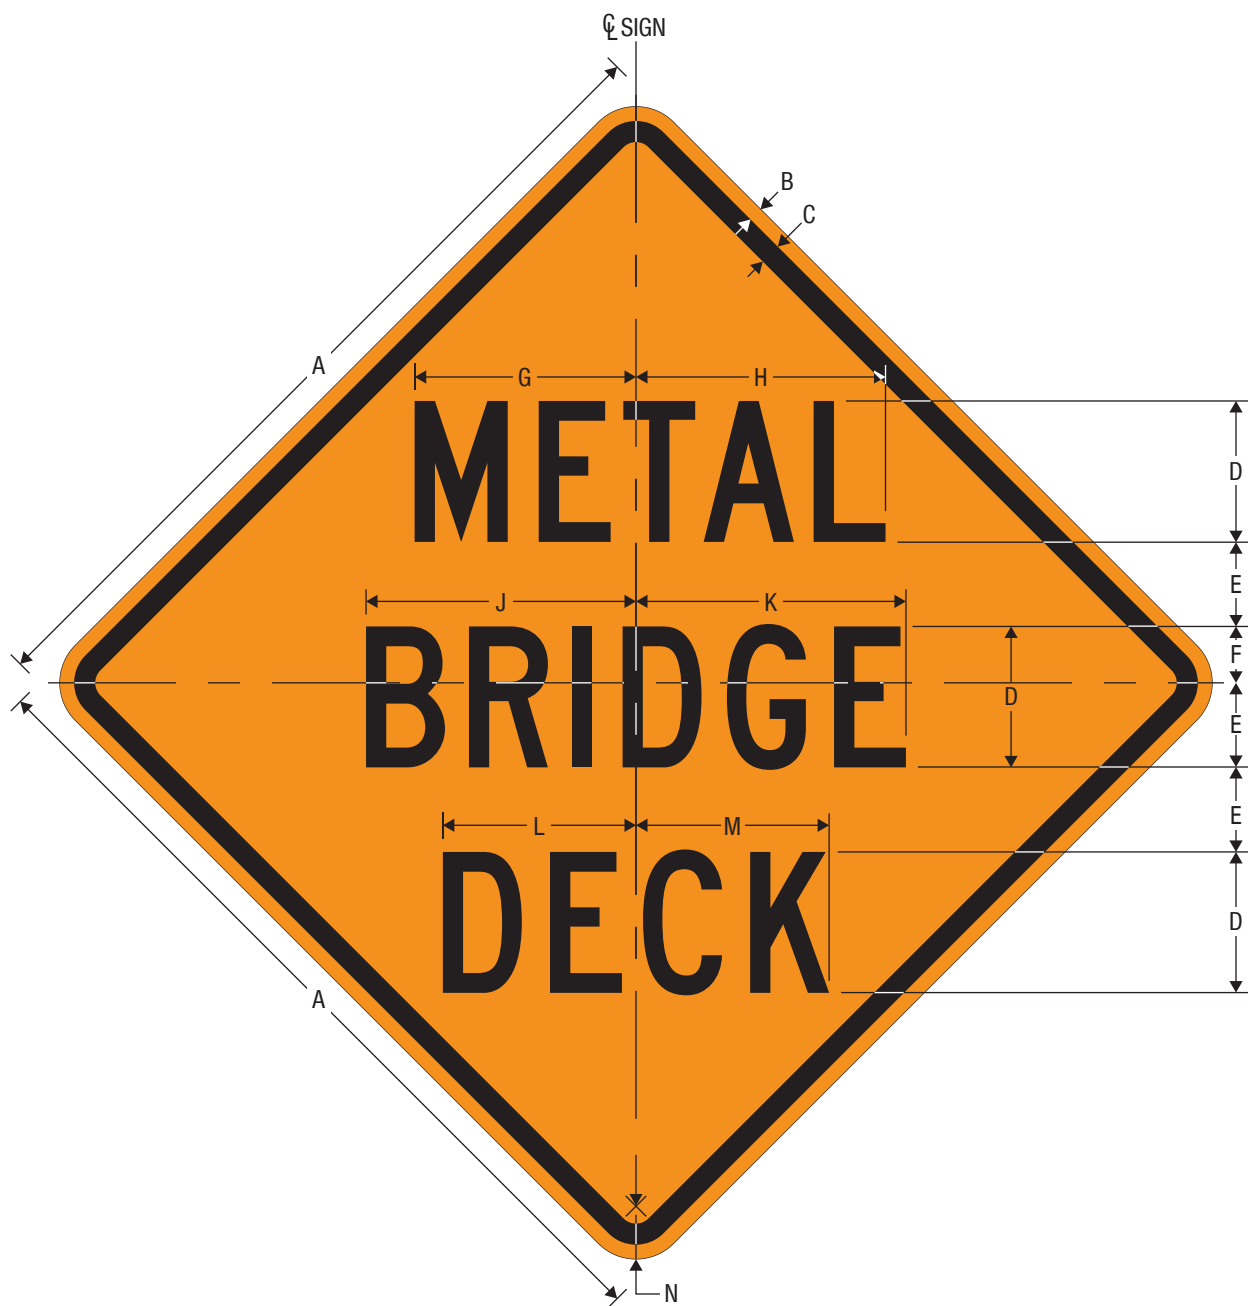

CW8-16
METAL BRIDGE DECK

A	B	C	D	E	F	G	H	J	K	L	M	N
24	0.375	0.625	4C	2.5	1.5	6.308	7.058	7.663	7.662	5.482	5.482	1.5
30	0.5	0.75	5C	3	2	7.854	8.853	9.578	9.578	6.853	6.852	1.875
36	0.625	0.875	6C	3.75	2.25	9.462	10.587	11.494	11.493	8.223	8.223	2.25
48	0.75	1.25	8C	5	3	12.616	14.116	15.325	15.325	10.964	10.964	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

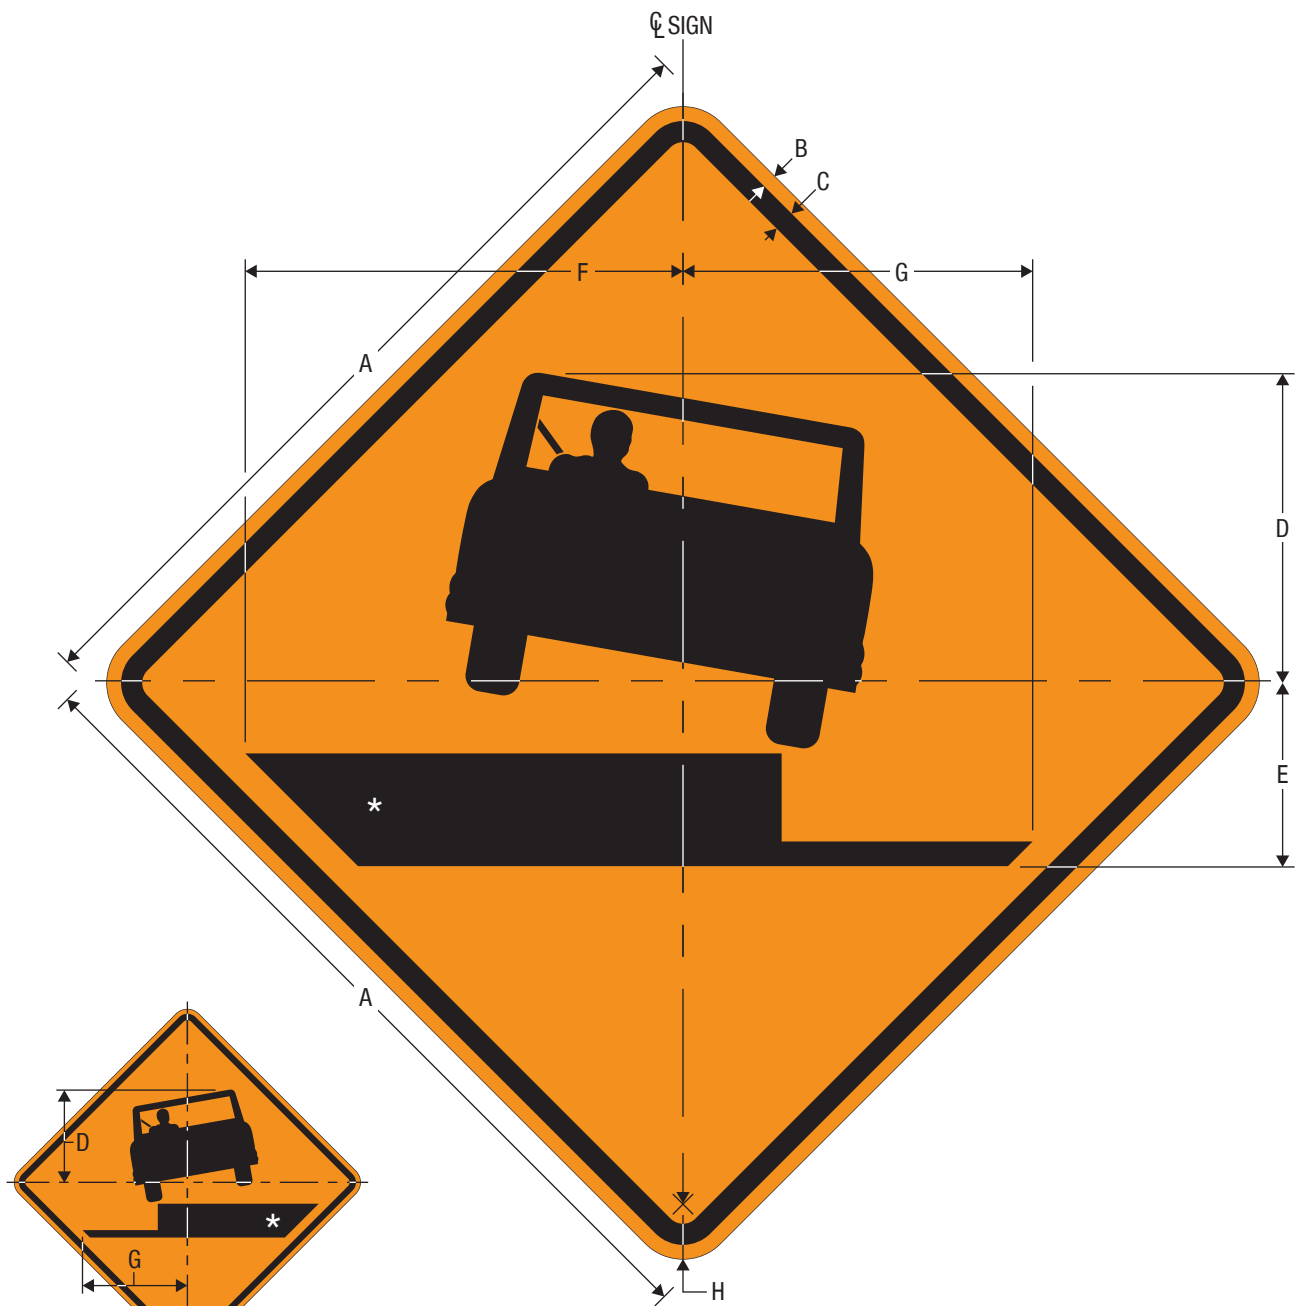


CW8-17L

CW8-17R
Shoulder Drop Off

*See Section 11 for symbol design.

A	B	C	D	E	F	G	H
24	0.375	0.625	9	5	12.425	9.925	1.5
30	0.5	0.75	11	6.5	15.531	12.406	1.875
36	0.625	0.875	13.5	7.5	18.640	14.885	2.25
48	0.75	1.25	18	10	24.850	19.850	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

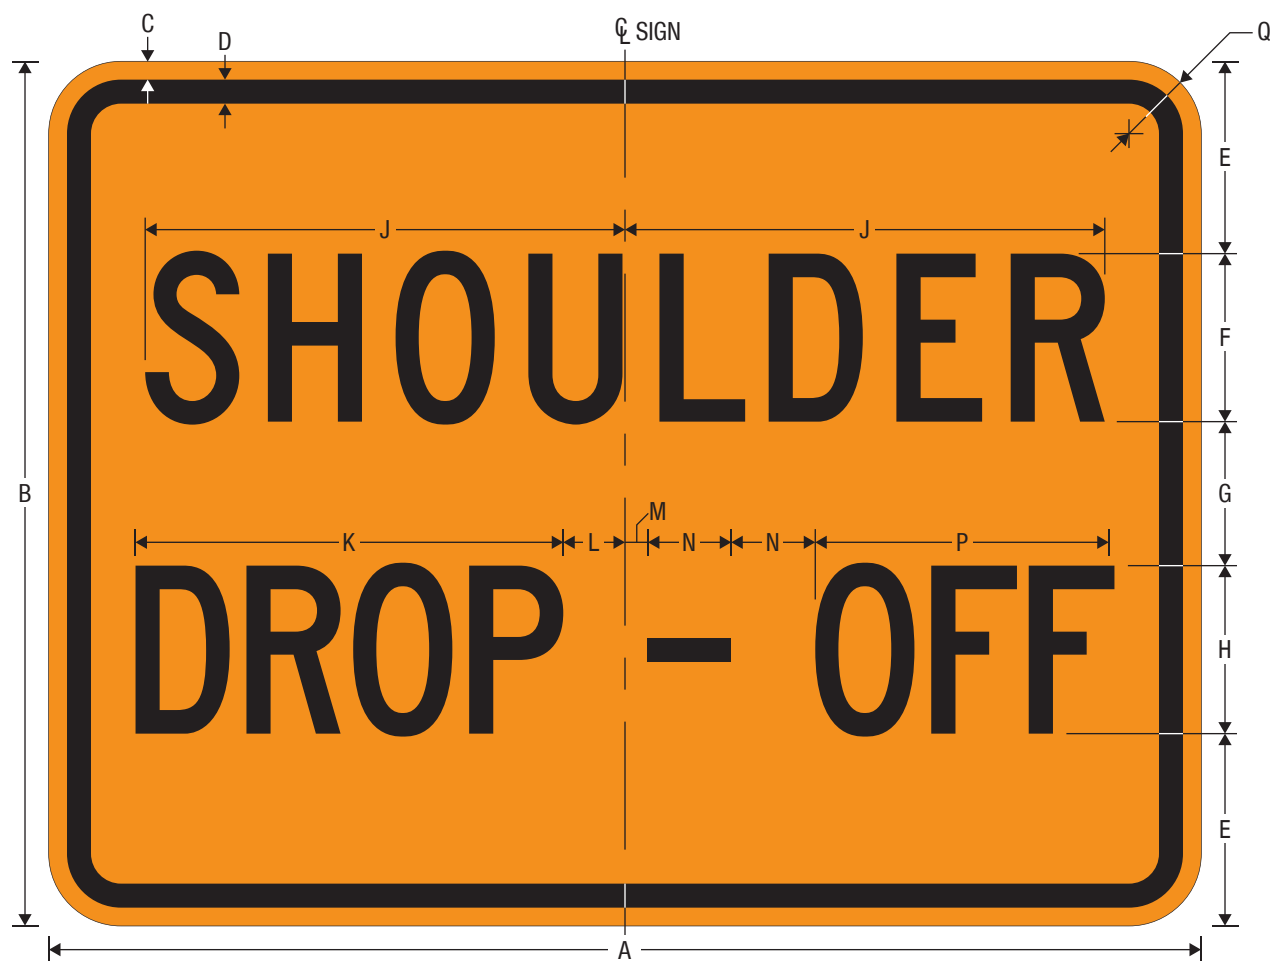

CW8-17P
SHOULDER DROP-OFF (Plaque)

*Reduce Spacing 50%.

**Reduce Spacing 30%.

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q
24	18	0.375	0.625	4	3.5C	3	3.5C*	9.996	8.911	1.286	0.464	1.75	6.233	1.5
30	24	0.375	0.625	6	4C	4	4C	11.424	11.284	1.260	0.740	2	7.803	1.5
36	30	0.5	0.75	7.5	5C	5	5C**	14.280	13.280	1.732	0.768	2.5	9.244	1.875

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW8-18
ROAD MAY FLOOD

A	B	C	D	E	F	G	H	J	K	L	M	N	P
24	0.375	0.625	4C	2	2.5	1.5	5.522	5.522	4.282	4.282	6.553	7.053	1.5
30	0.5	0.75	5C	2.5	3.125	1.875	6.903	6.902	5.353	5.352	8.253	8.753	1.875
36	0.625	0.875	6C	3	4	2	8.283	8.283	6.423	6.423	9.954	10.454	2.25
48	0.75	1.25	8C	4	5	3	11.044	11.044	8.564	8.564	13.105	14.105	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW8-23
NO SHOULDER


A	B	C	D	E	F	G	H	J	K	L	M
24	0.375	0.625	4C	3	0.5	3.5	2.701	2.701	11.674	11.174	1.5
30	0.5	0.75	5C	3.75	0.625	4.375	3.377	3.376	14.592	13.968	1.875
36	0.625	0.875	6C	4.5	0.75	5.25	4.052	4.051	17.511	16.761	2.25
48	0.75	1.25	8C	6	1	7	5.402	5.402	23.348	22.348	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



A	B	C	D	E	F	G	H	J	K	L	M	N	P
30	0.5	0.75	4 D	3	2.5	1.5	7.214	7.713	7.374	7.874	8.356	8.855	1.875
36	0.625	0.875	5 D	3.5	3.5	1.5	9	9.659	9.280	9.780	10.5	11.014	2.25
48	0.75	1.25	7 D	4.5	4.75	2.25	12.561	13.561	12.842	13.842	14.560	15.559	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

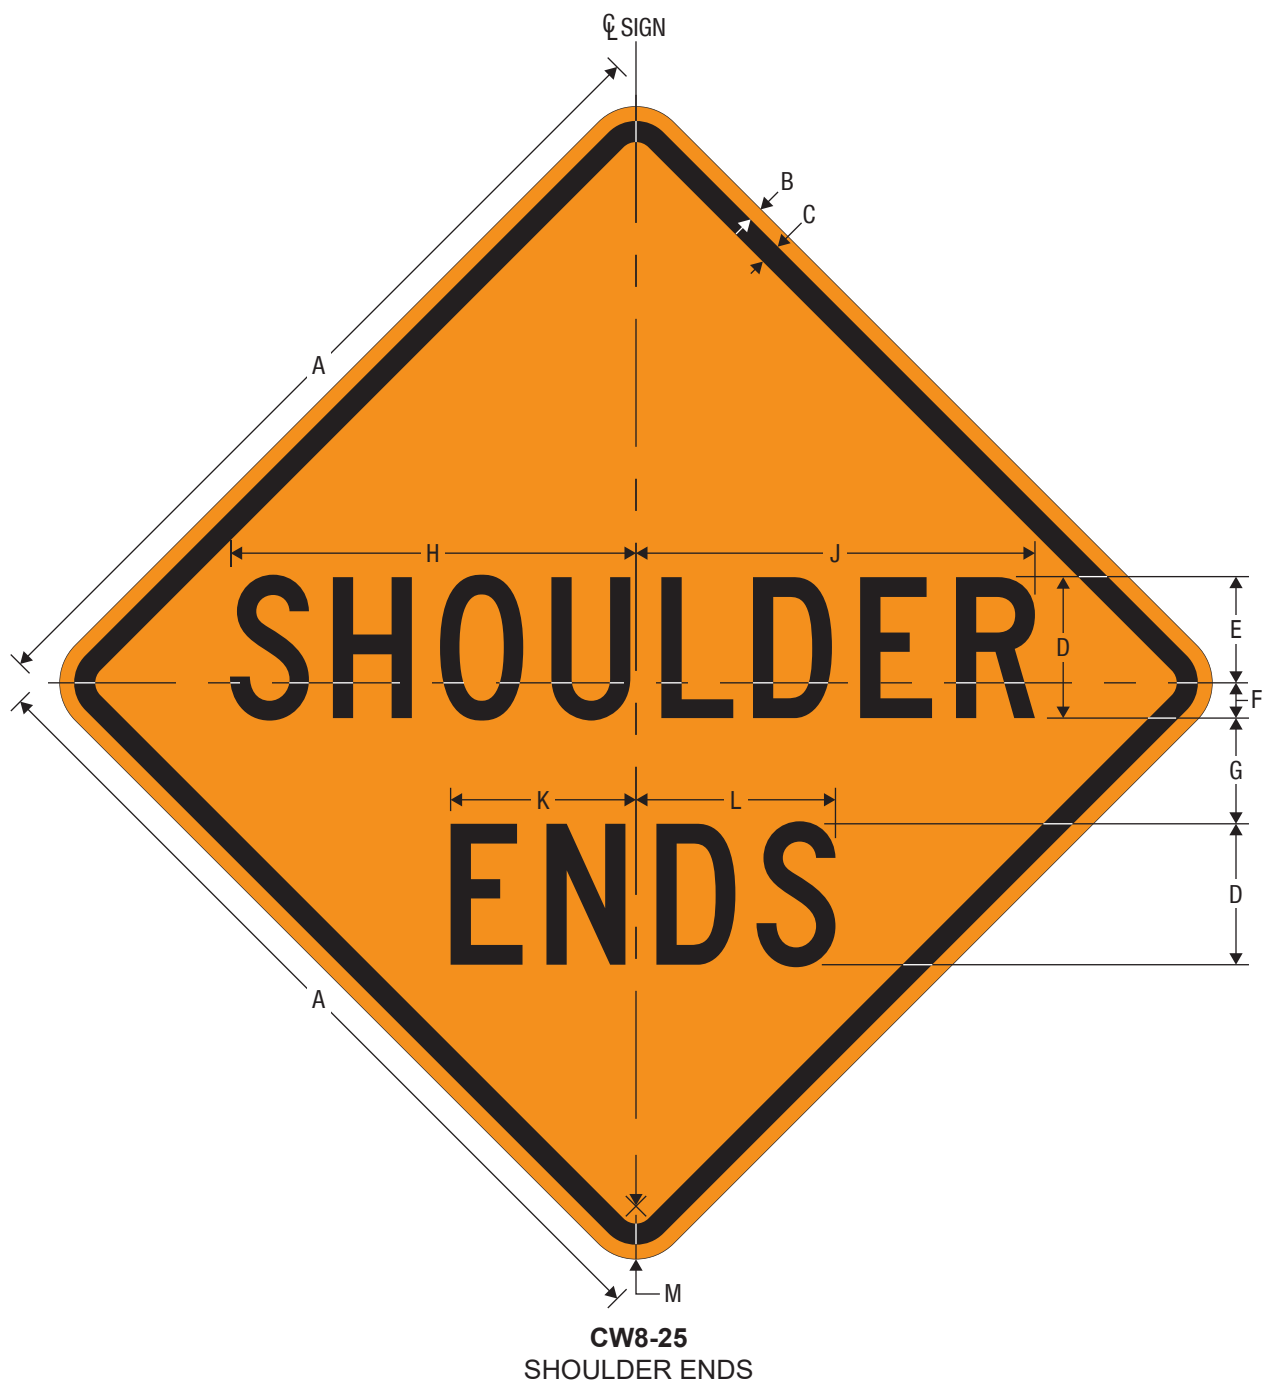

A	B	C	D	E	F	G	H	J	K	L	M
24	0.375	0.625	4 C	3	1	3	11.424	11.424	5.212	5.712	1.5
30	0.5	0.75	5 C	3.75	1.25	3.75	14.280	14.280	6.578	7.077	1.875
36	0.625	0.875	6 C	4.75	1.25	4.5	17.261	17.011	7.693	8.693	2.25
48	0.75	1.25	8 C	6	2	6	22.973	22.723	10.424	11.424	3


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



A	B	C	D	E	F	G	H
30	0.5	0.75	5D	2.5	1.5	3.5	8.582
36	0.625	0.875	6D	3	2	4	10.373
48	0.75	1.25	8D	4	3	5	13.830

J	K	L	M	N	P	Q	R
9.331	8.055	8.054	7.807	8.306	1.875	7.153	7.152
11.122	9.666	9.665	9.293	10.042	2.25	8.583	8.583
14.830	12.887	12.887	12.390	13.390	3	11.444	11.444

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

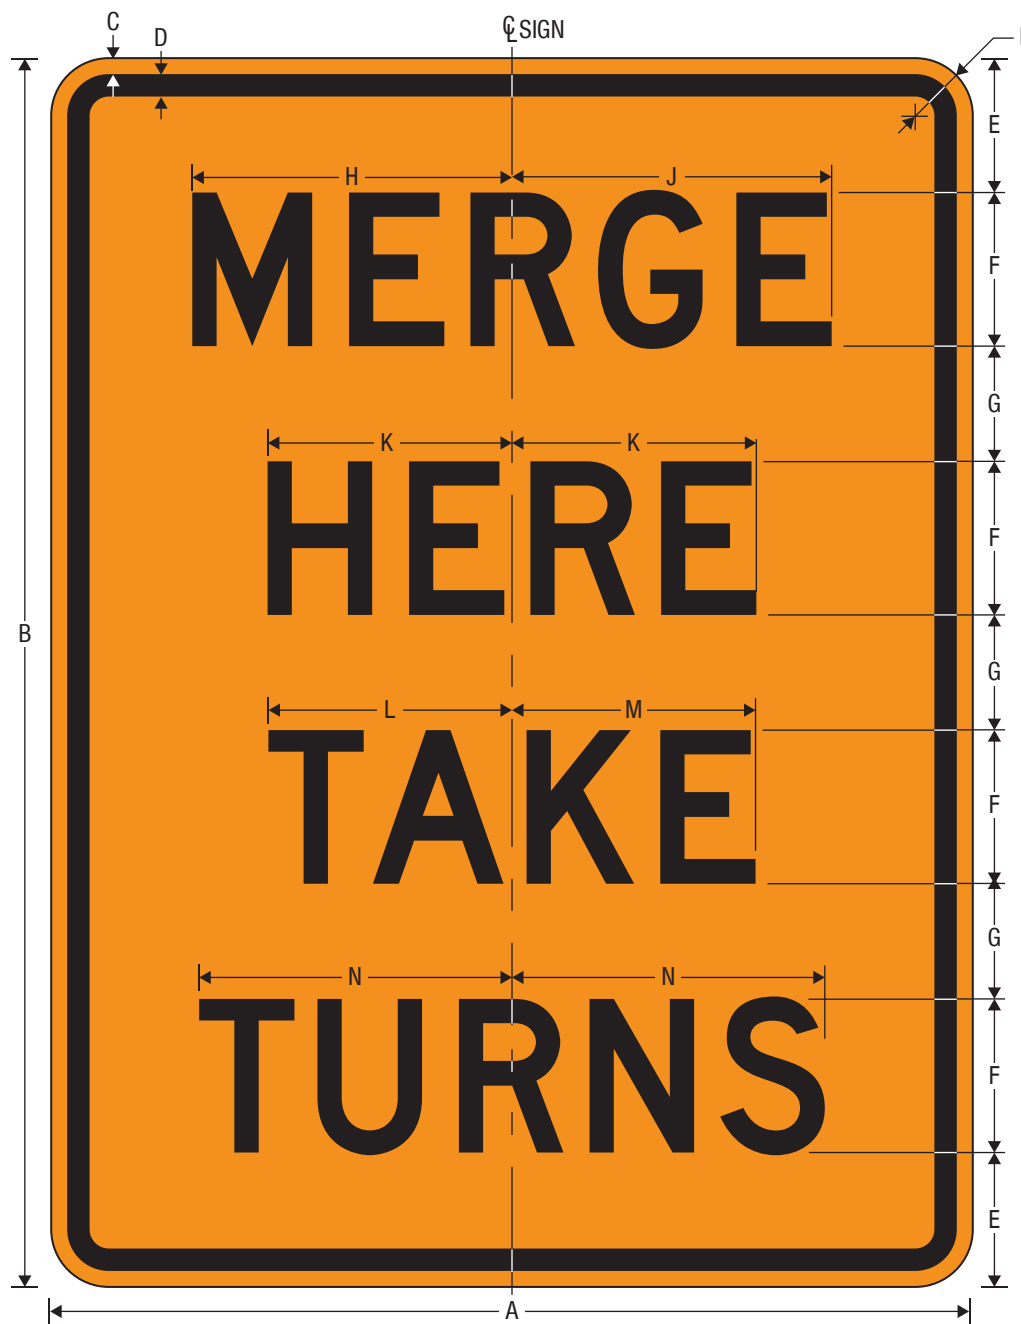


CW9-2a
MERGE HERE TAKE TURNS

A	B	C	D	E	F	G
36	48	0.625	0.875	5.25	6 D	4.5

H	J	K	L	M	N	P
12.488	12.487	9.546	9.515	9.514	12.220	2.25

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

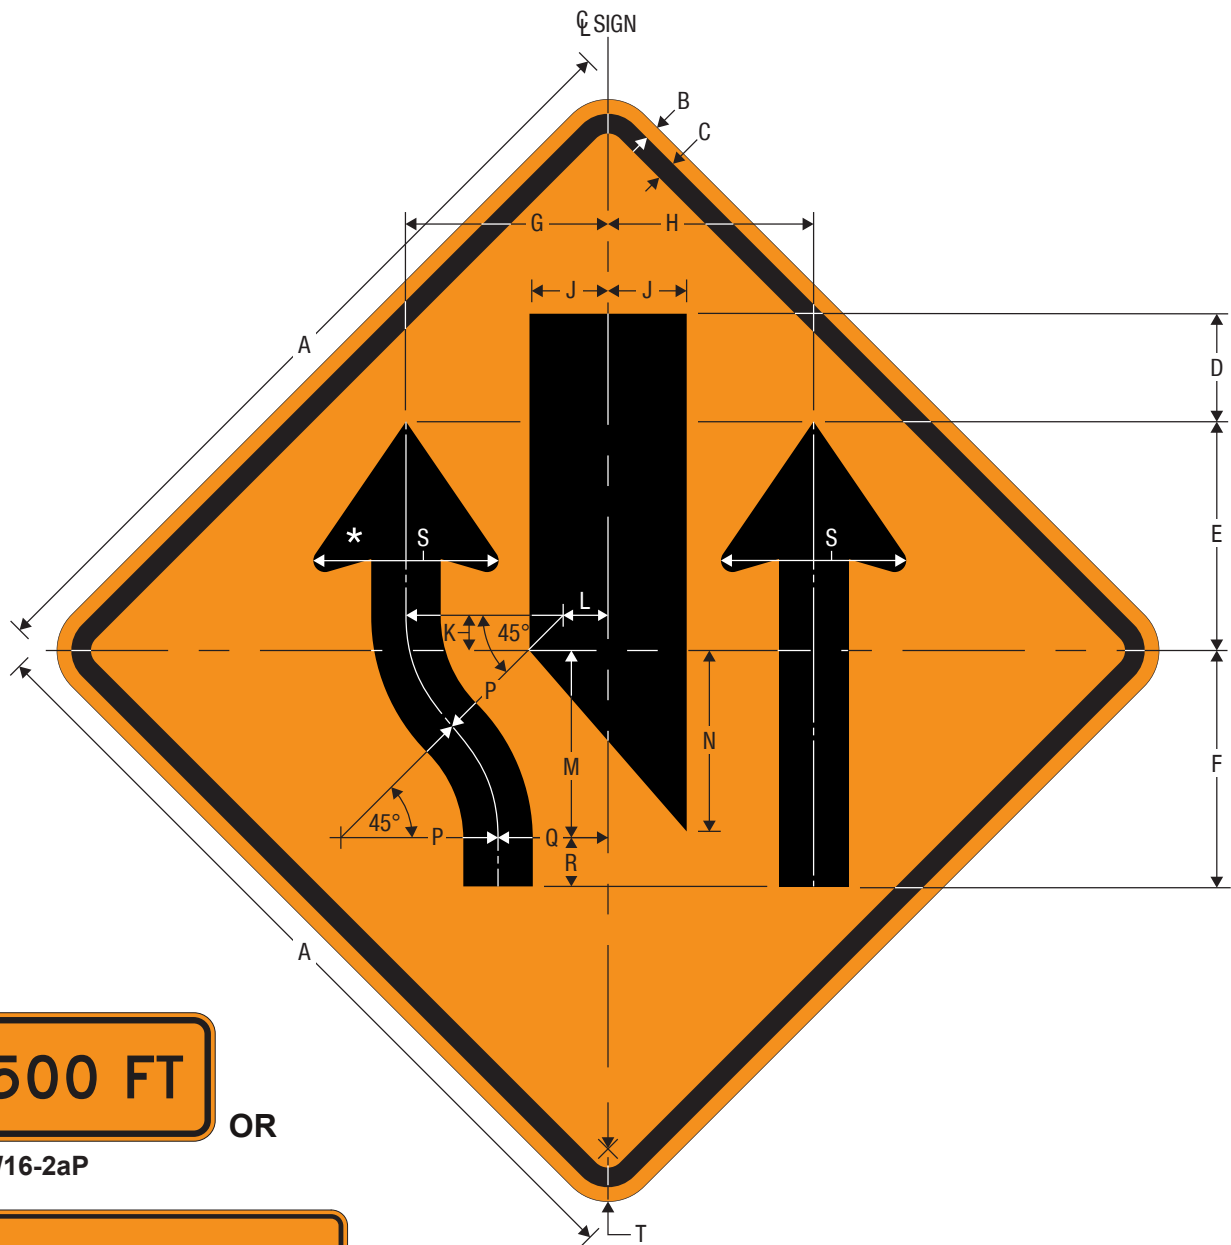

OR
CW16-2aP



CW16-3aP

Alternate Legends

1000 FT

1500 FT

1 MILE


CW9-3
Interior Lane Shift Ahead

*See Section 11 for arrow design.

A	B	C	D	E	F	G	H	J
30	0.5	0.75	4	8.5	8.75	7.5	7.625	2.917
36	0.625	0.875	4.8	10.2	10.5	9	9.15	3.5
48	0.75	1.25	6.4	13.6	14	12	12.2	4.667

K	L	M	N	P	Q	R	S	T
1.25	1.666	7	6.710	5.833	4.083	1.75	6.875	1.875
1.5	2	8.399	8.053	7	4.899	2.101	8.25	2.25
2	2.666	11.199	10.737	9.333	6.533	2.801	11	3

COLORS: LEGEND - BLACK
BACKGROUND - ORANGE

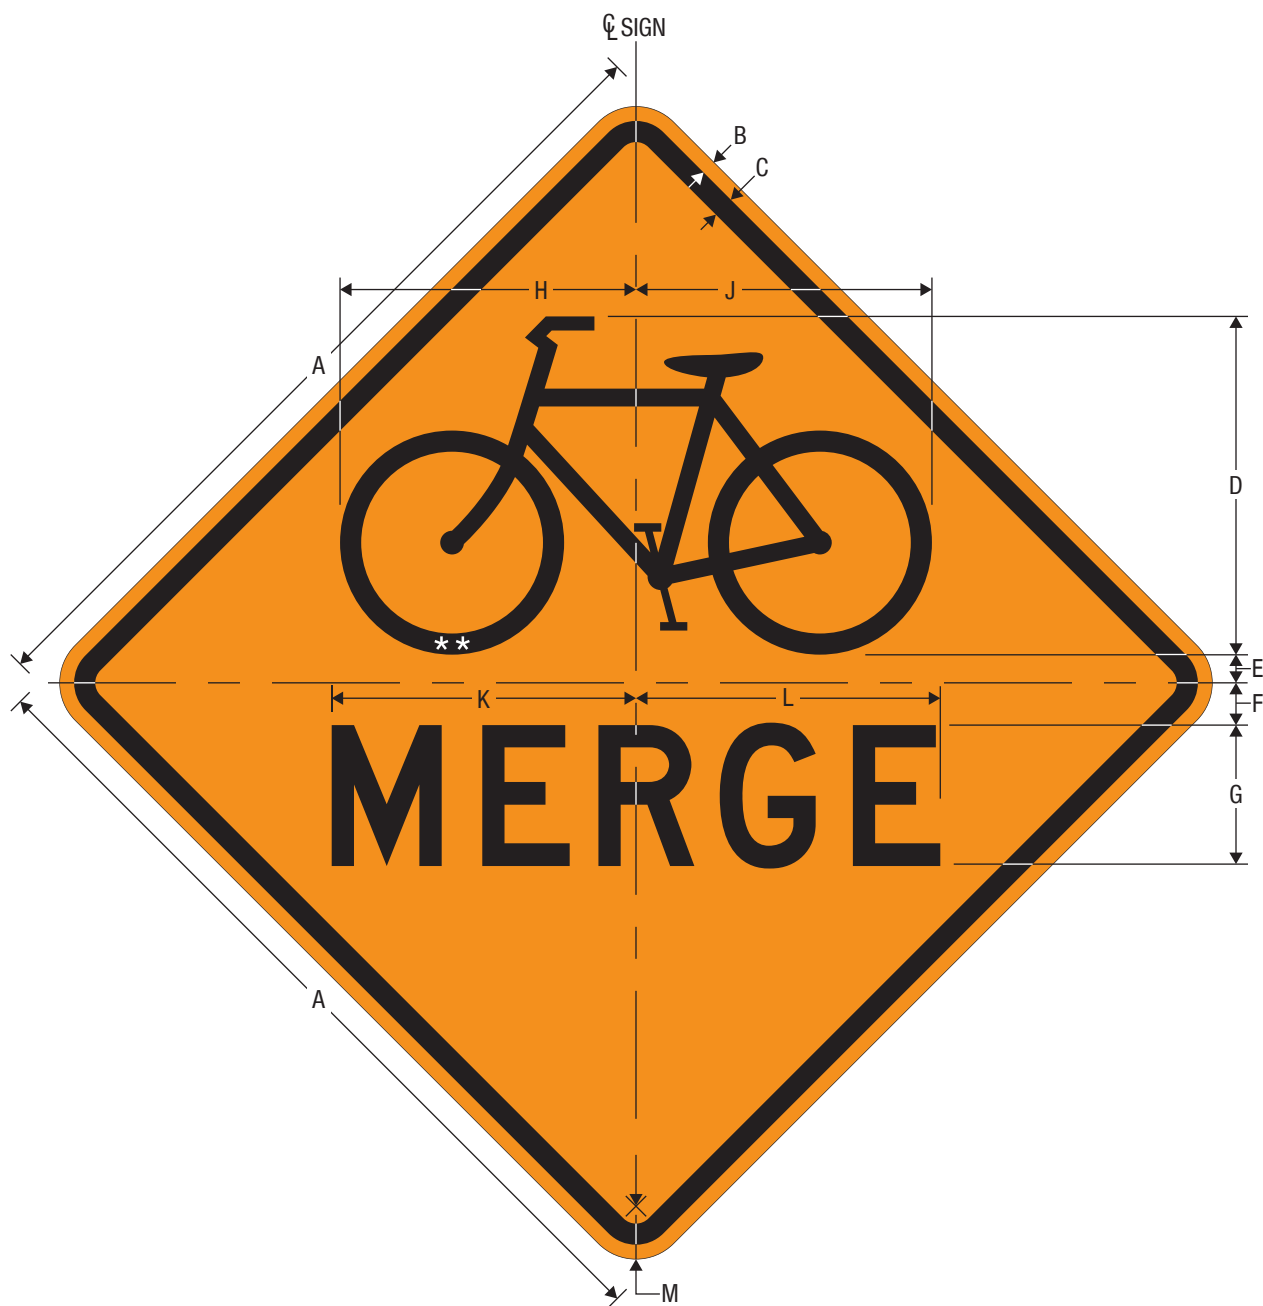


CW9-5a
Bicycles Merging

*Increase Spacing 20%.

**See Section 11 for symbol design.

A	B	C	D	E	F	G	H	J	K	L	M
18	0.375	0.625	7.25	0.375	0.75	3D*	6.345	6.344	6.478	6.478	1.5
30	0.5	0.75	12	1	1.5	5D*	10.5	10.5	10.797	10.796	1.875


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

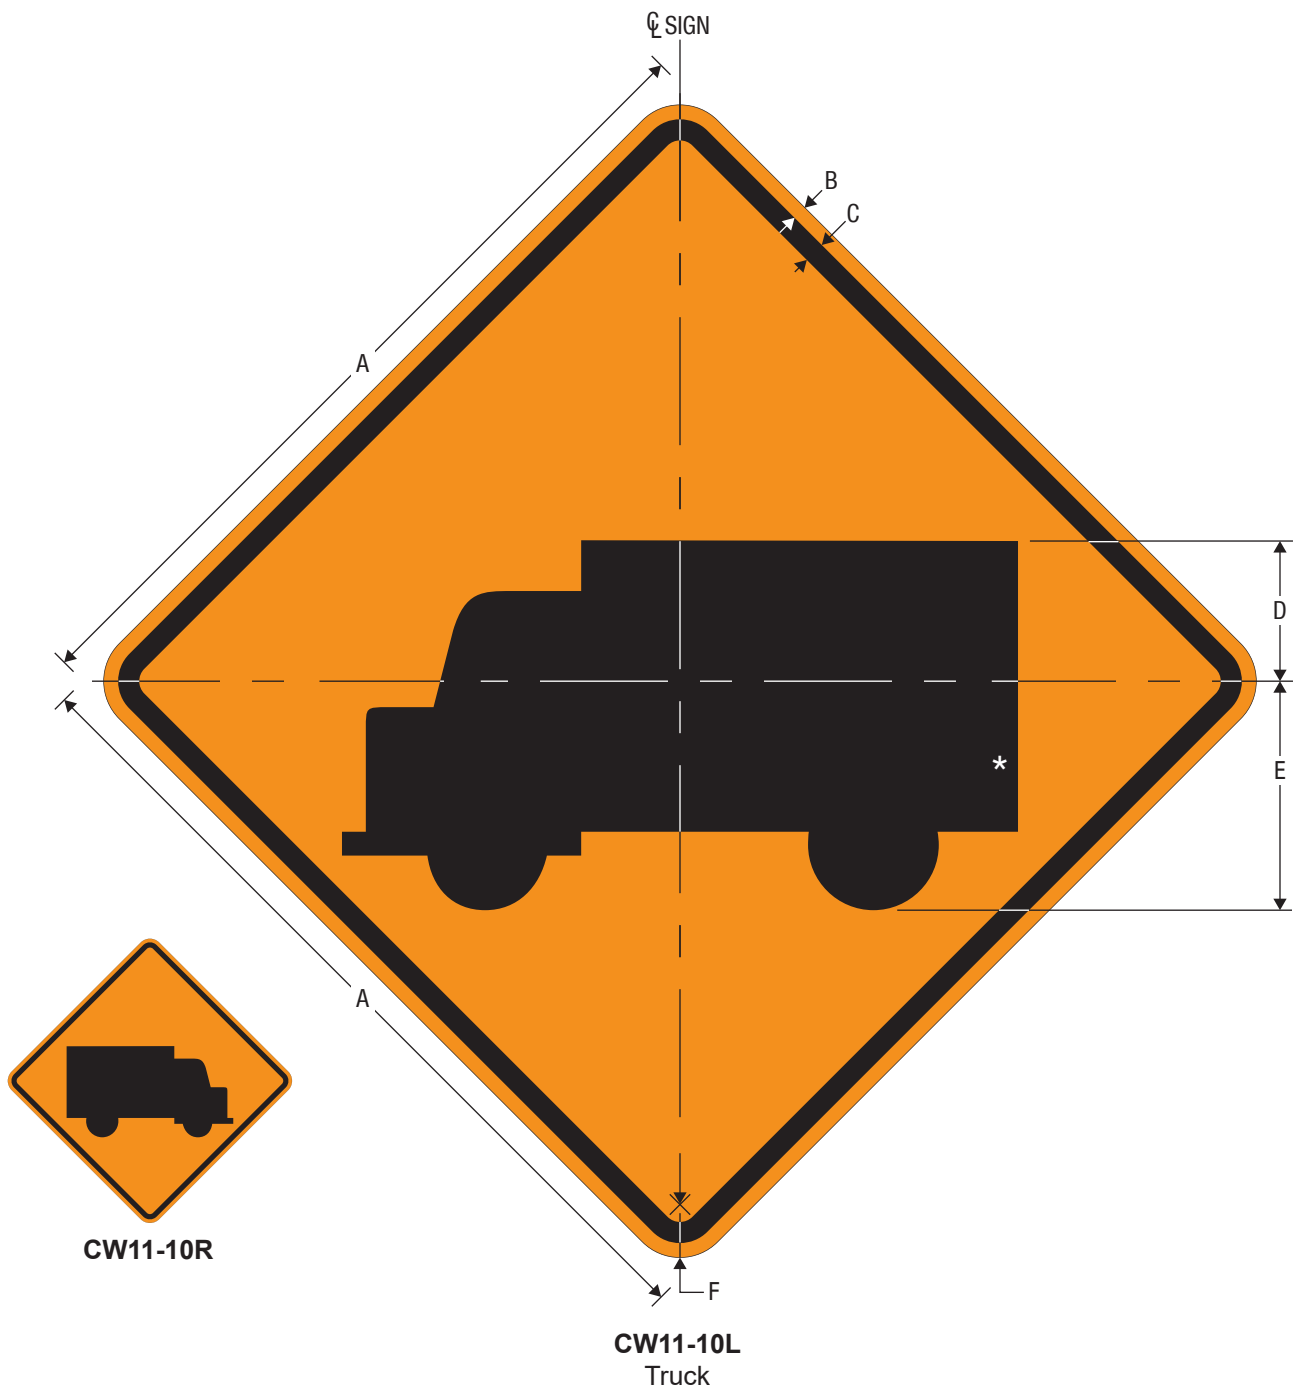

*See Section 11 for symbol design.

A	B	C	D	E	F
24	0.375	0.625	4	6.5	1.5
30	0.5	0.75	5	8.125	1.875
36	0.625	0.875	6	9.5	2.25
48	0.75	1.25	8	12.75	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

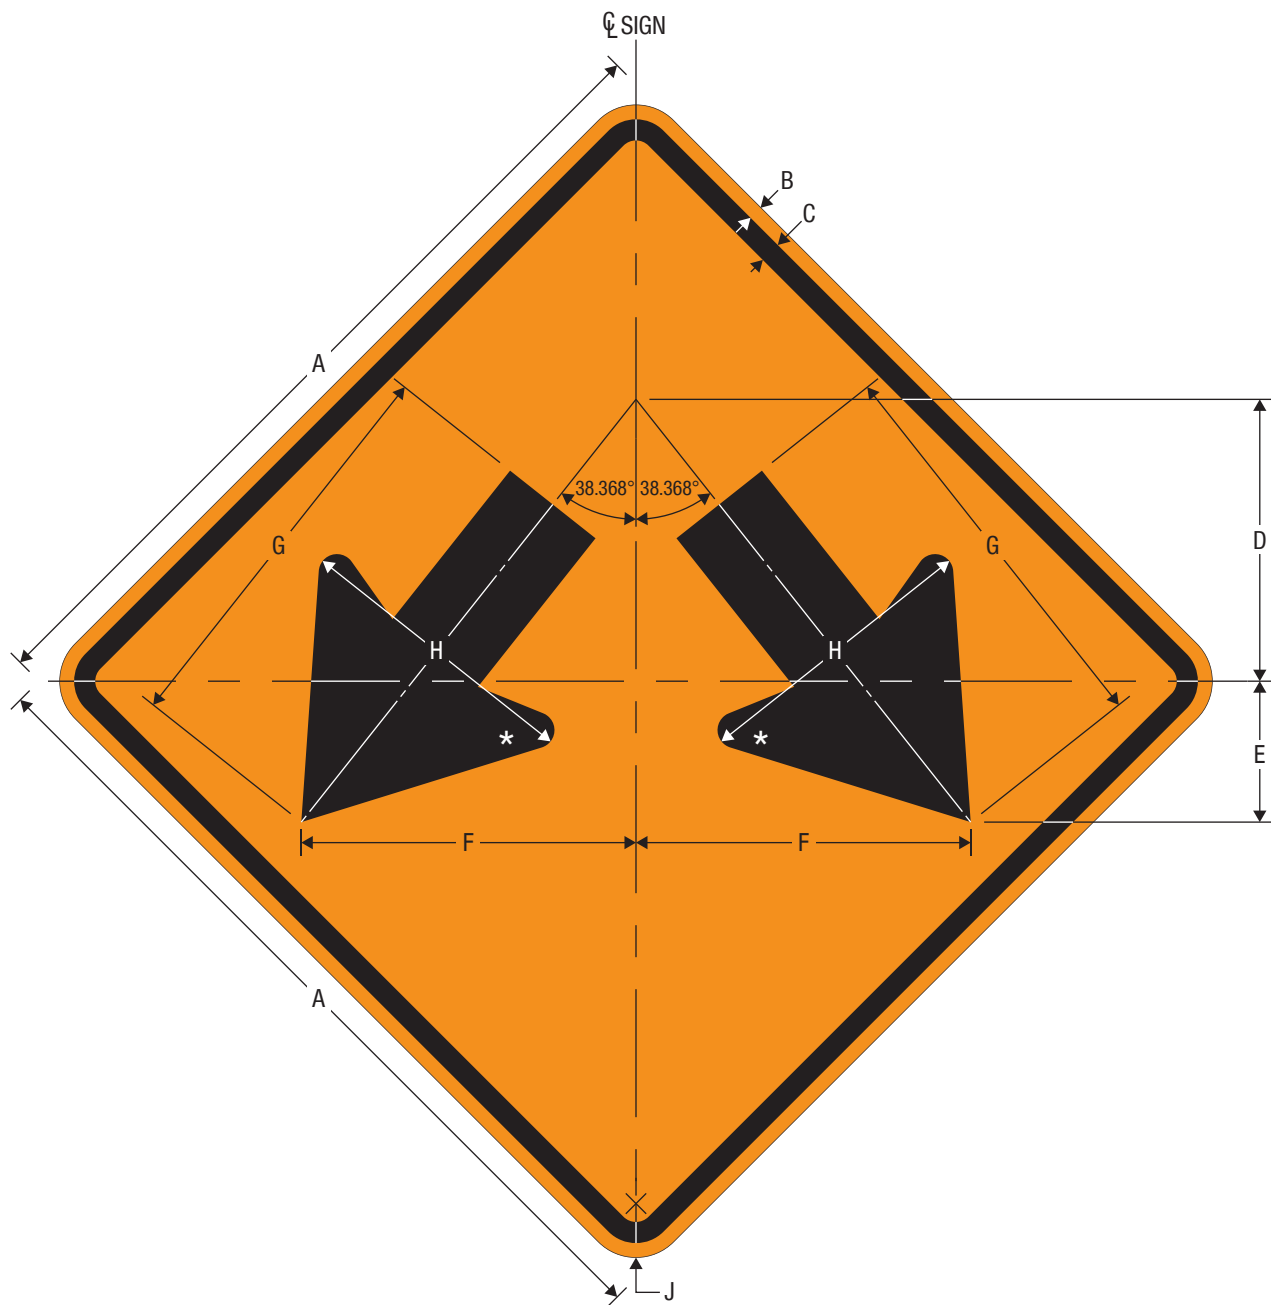


CW12-1
Double Arrow

*See Section 11 for arrow design.

A	B	C	D	E	F	G	H	J
30	0.5	0.75	10	5	11.875	14.375	10.313	1.875
36	0.625	0.875	12	6	14.25	17.25	12.375	2.25

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

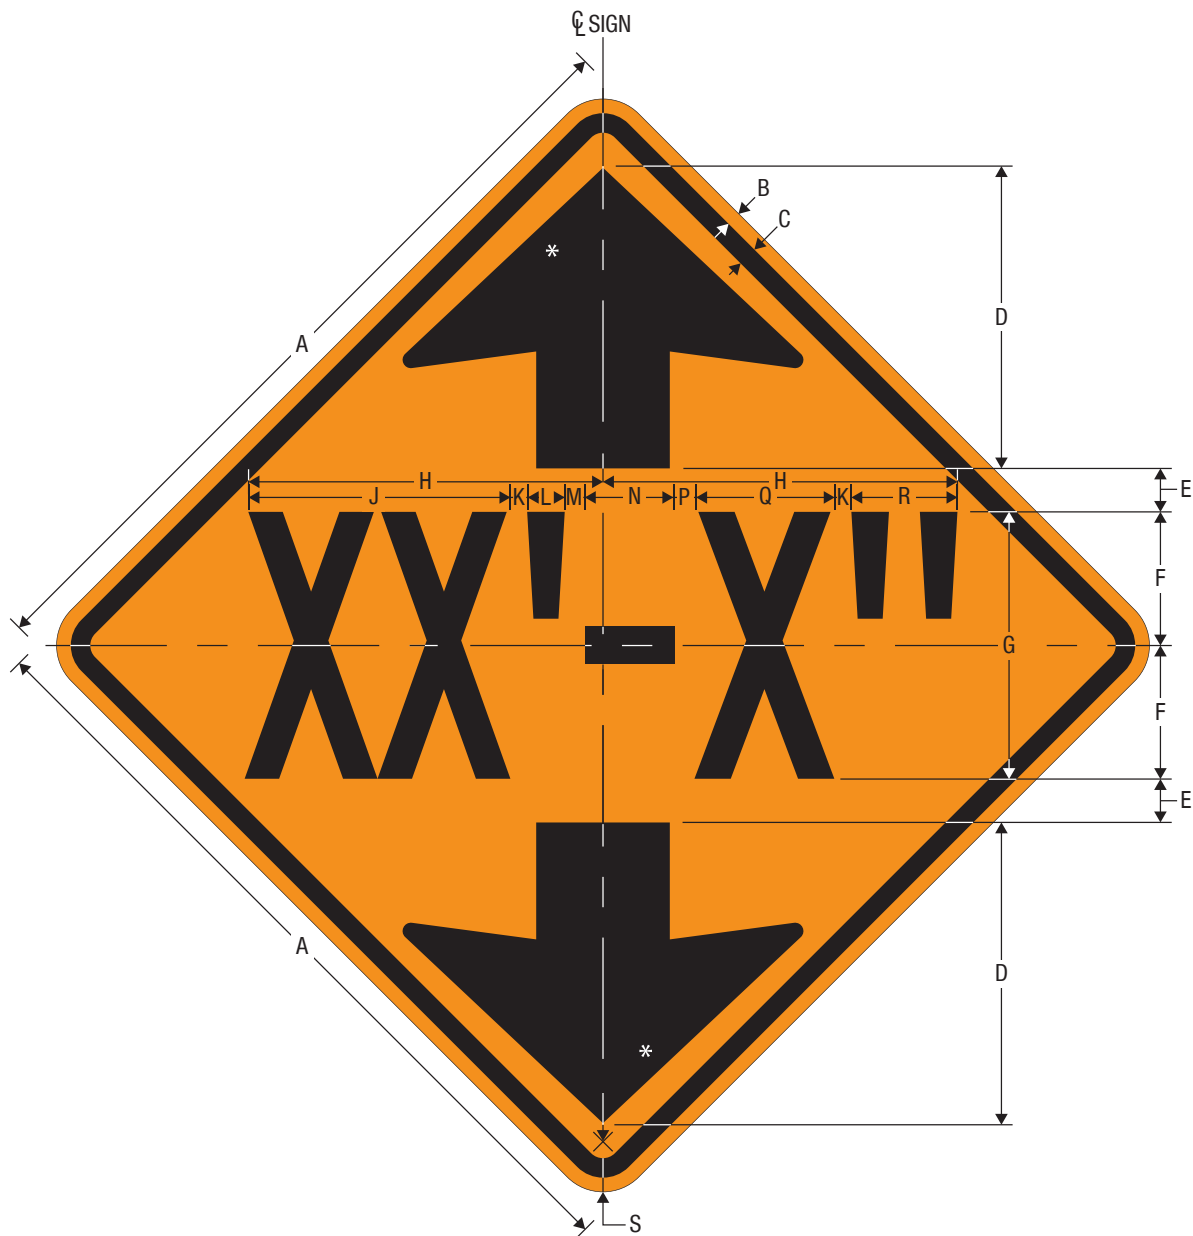


CW12-2
Clearance Advance

*See Section 11 for arrow design.

	A	B	C	D	E	F	G	H	J
18	18	0.375	0.625	6.75	0.975	3	6C	VAR	VAR
30	30	0.5	0.75	11.25	1.625	5	10C	VAR	VAR
36	36	0.625	0.875	13.5	1.950	6	12C	VAR	VAR
48	48	0.75	1.25	18	2.600	8	16C	VAR	VAR

	K	L	M	N	P	Q	R	S
0.375	0.375	0.844	0.438	2	0.5	VAR	2.381	1.5
0.625	0.625	1.406	0.729	3.333	0.833	VAR	3.969	1.875
0.75	0.75	1.687	0.875	4	1	VAR	4.762	2.25
1	1	2.25	1.667	5.333	1.333	VAR	6.350	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

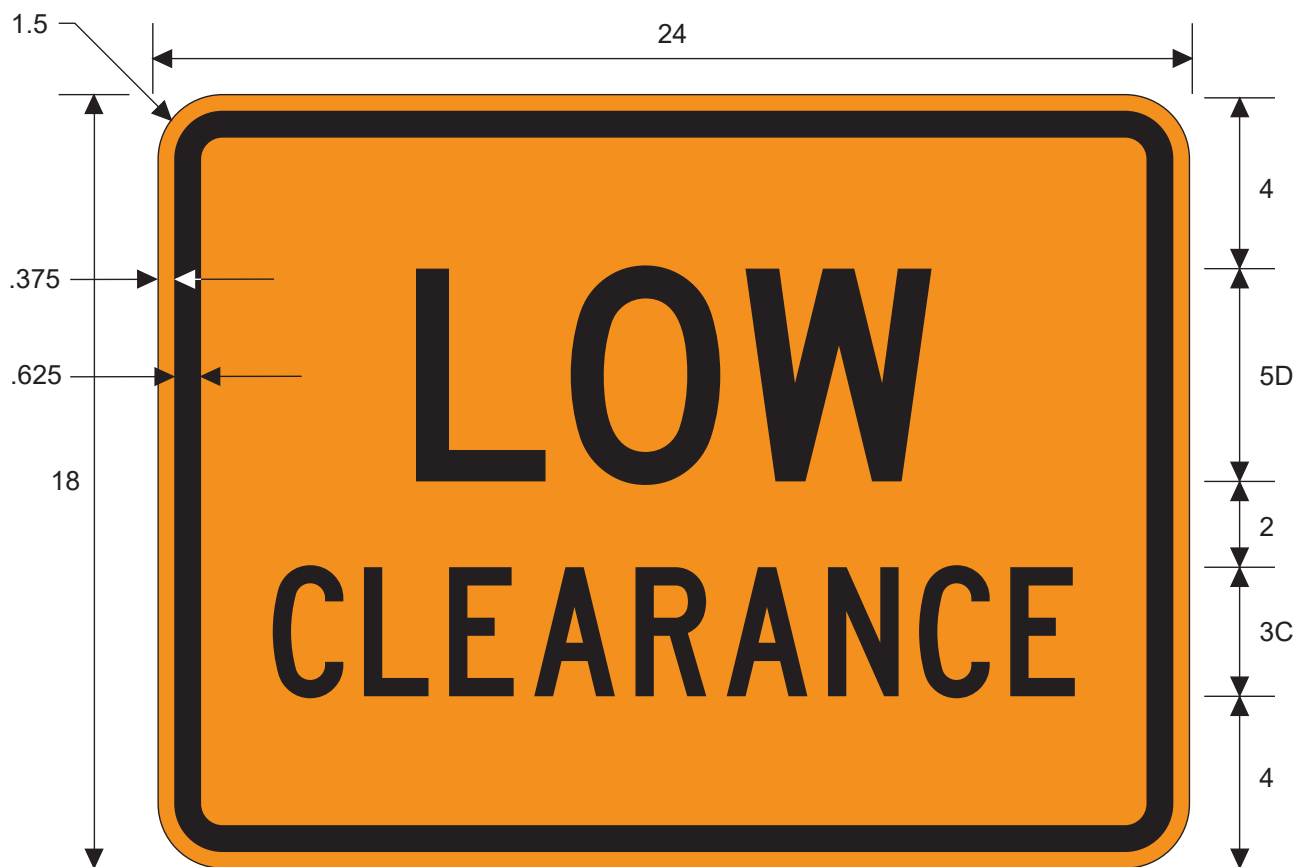


CW12-2PT
Low Clearance (Plaque)



COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

For use in advance of points when the Clearance Advance (W12-2) sign legend is 14 feet 5 inches or less.



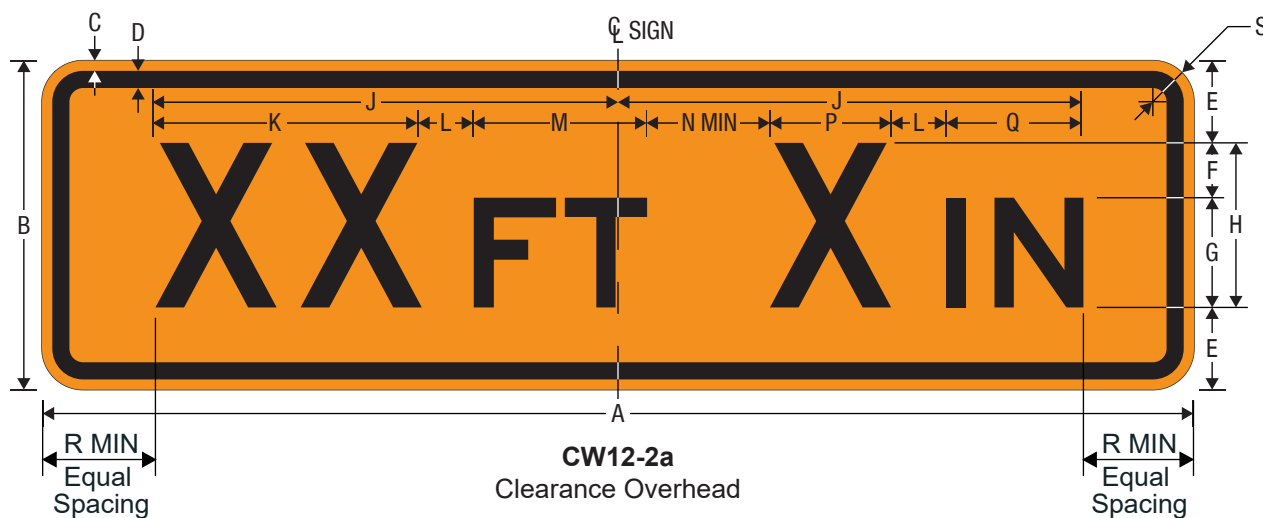

*Only to be used in conjunction with TURNAROUND (D13-1T) sign.


A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S
66*	12*	0.375	0.625	2.5	4	5E	7E	VAR	VAR	4	8.5	7	VAR	6.5	6	1.5
96*	18*	0.375	0.625	4	4	8E	10E	VAR	VAR	4	13	10	VAR	10	8	1.5
84	24	0.75	0.625	6	4	8E	12E	VAR	VAR	4	12.5	8	VAR	9	6	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



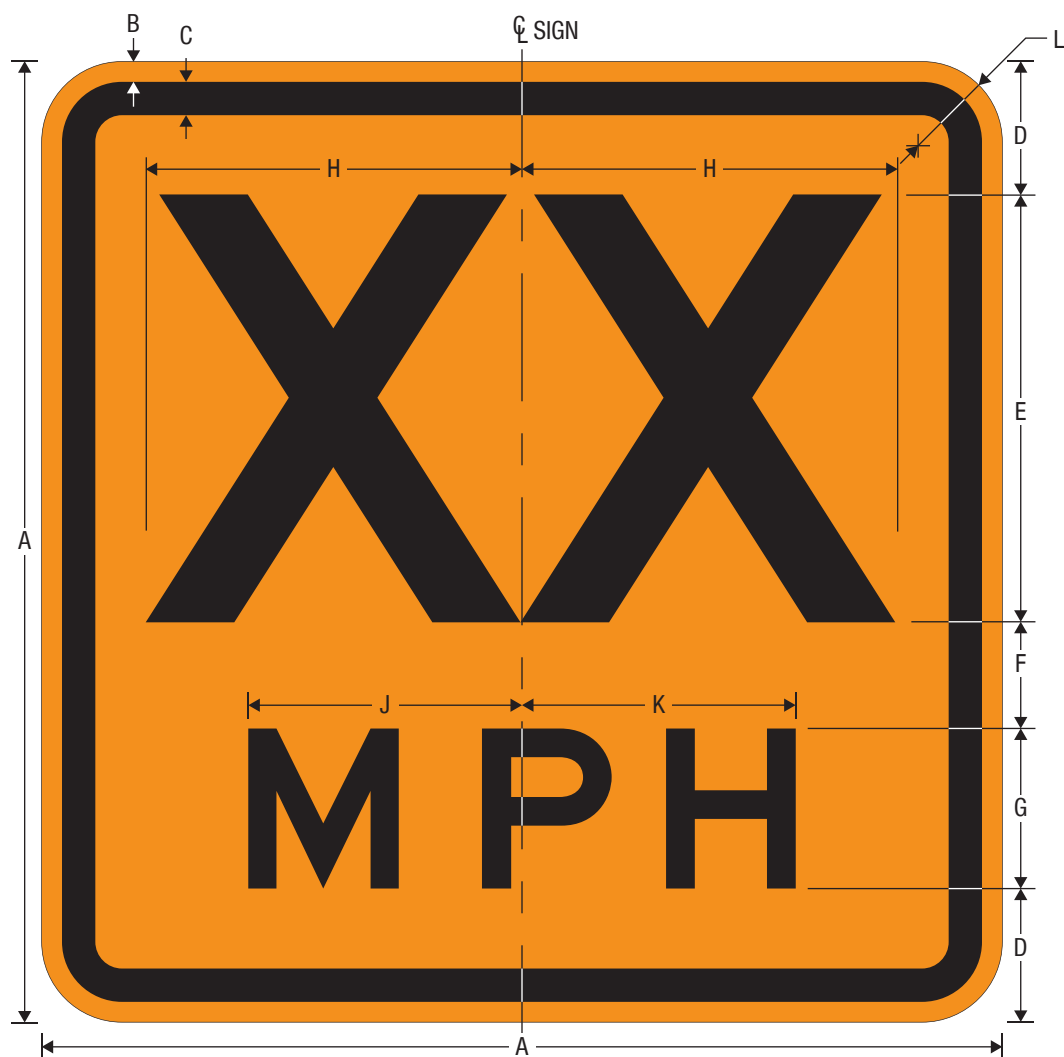

CW13-1P
Advisory Speed (Plaque)

*Increase spacing 100%.

**Optically space numerals about vertical center line.

A	B	C	D	E	F	G	H	J	K	L
18	0.375	0.625	2.5	8E**	2	3E*	VAR	5.133	5.132	1.5
24	0.375	0.625	3.625	10E**	2.75	4E*	VAR	6.843	6.843	1.5
30	0.5	0.75	4.5	12E**	4	5E*	VAR	8.554	8.554	1.875


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW13-4P
ON RAMP (Plaque)

A	B	C	D	E	F	G	H	J
36	0.625	0.875	7.25	8D	5.5	6.445	13.850	2.25

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

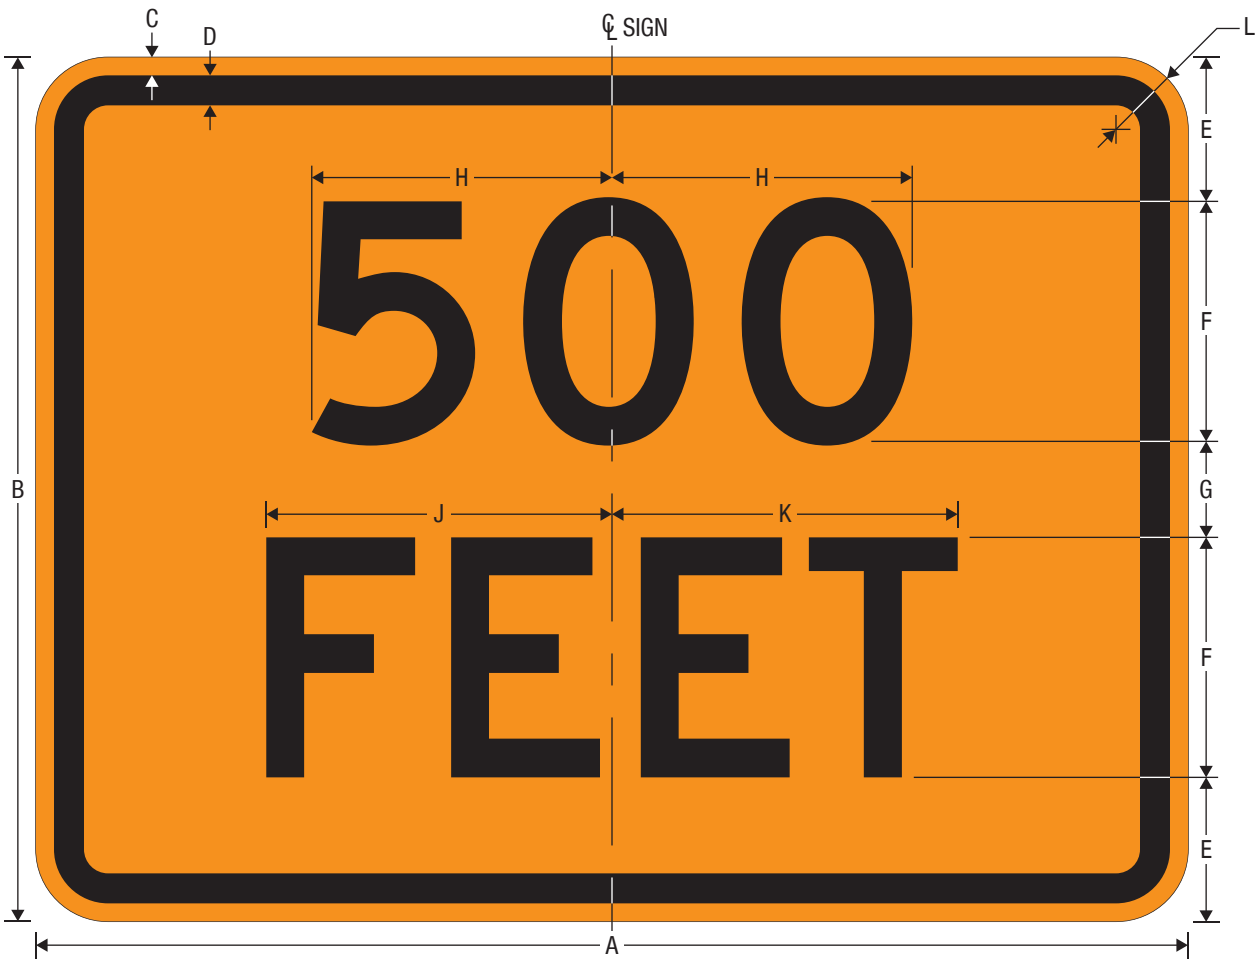

CW16-2P

[Distance Plaque] XX FEET (2-Line Plaque)

Distances should be in 500 ft increments:


1000

1500



A	B	C	D	E	F	G	H	J	K	L
18	12	0.375	0.438	2	3D	2	VAR	4.322	4.321	1.5
24	18	0.375	0.625	3	5D	2	VAR	7.203	7.202	1.5
30	24	0.375	0.625	4.375	6D	3.25	VAR	8.643	8.643	1.5

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

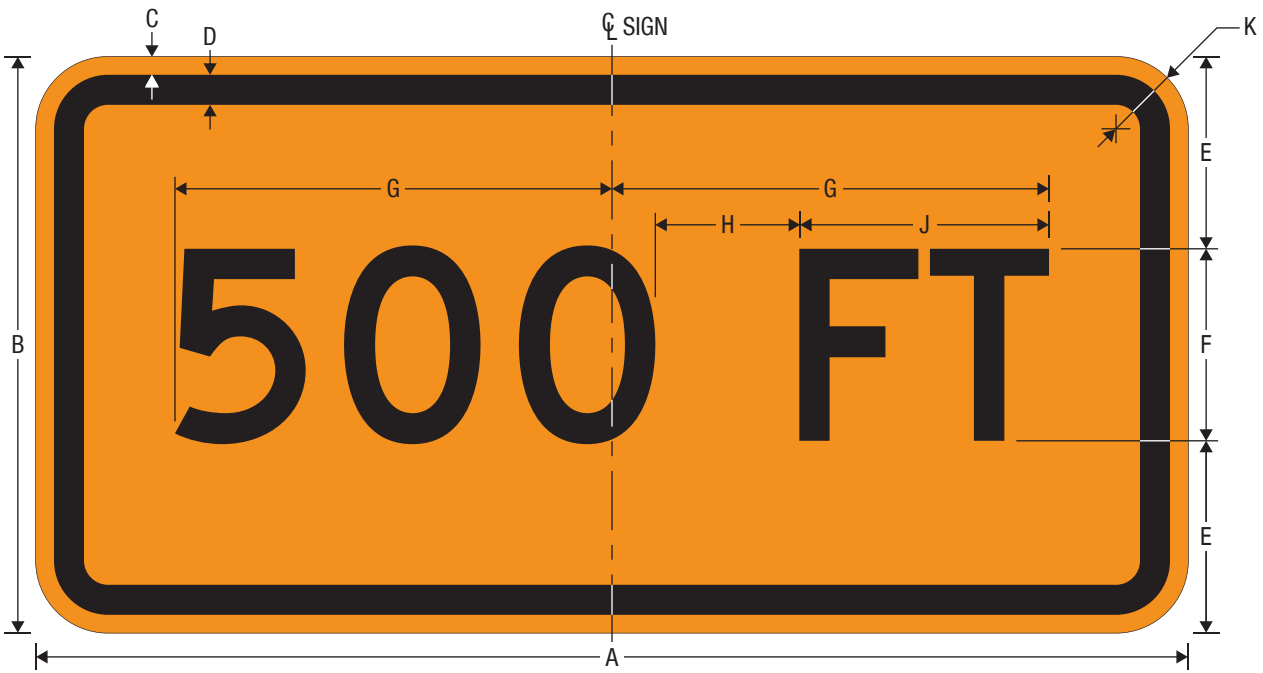

CW16-2aP
[Distance Plaque] XX FT (1-Line Plaque)

Distances should be in 500 ft increments:

1000 FT

1500 FT

Vary letter and word spacing as needed.



A	B	C	D	E	F	G	H	J	K
12	9	0.375	0.375	3.25	2.5C	VAR	1.25	2.701	1
24	12	0.375	0.438	4	4D	VAR	3	5.202	1.5
30	18	0.375	0.625	6	6C	VAR	4	6.483	1.5

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW16-3P [4]
[Distance Plaque] XX MILES (2-Line Plaque)

Distances should be in ½ mile increments:
Distance may vary.



CW16-3P [1]



CW16-3P [2]




CW16-3P [3]

A	B	C	D	E	F	G	H	J
30	24	.375	.625	1.5	4.375	6D	3.25	4.5
36	24	.375	.625	1.5	3.5	7D	3.25	4.5

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



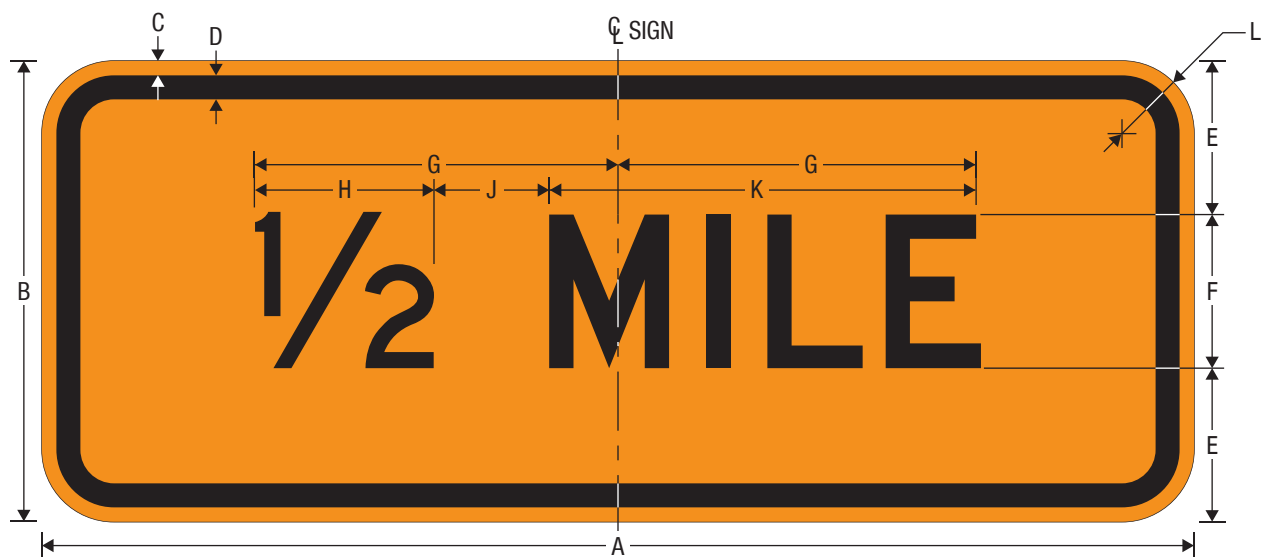

CW16-3aP [1]

[Distance Plaque] XX MILES (1-Line Plaque)

A	B	C	D	E	F	G	H	J	K	L
30	12	0.375	0.438	4	4D	VAR	VAR	3	11.244	1.5

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW16-3aP [2]



A	B	C	D	E	F	G	H
36	.625	.875	4D	2.5	6E	1	2.25
48	.75	1.25	5D	3.5	8E	1.25	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





CW19-3
FREEWAY ENDS

A	B	C	D	E	F	G	H	J	K	L
48	0.75	1.25	9C	6.75	2.25	5	21.699	12.290	12.289	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW19-5
ALL TRAFFIC MUST EXIT

A	B	C	D	E	F	G	H
90	48	0.75	1.25	10.5	9 D	9	21.519

J	K	L	M	N	P	Q
7.838	38.357	29.270	1.120	7.880	22.511	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW20-1[D]
ROAD WORK

Distances should be in ½ mile or 500 ft increments:

***Alternate 1st Line Legends**

SIGN	CW20SN-1 D Series
SIGNAL	CW20SG-1 C Series
BRIDGE	CW20BR-1 C Series
STREET	CW20ST-1 C Series
RAMP	CW20RP-1 D Series

****Alternate 3rd Line Legends**

500 FT	CW20-1[C] D Series
1000 FT	CW20-1[B] C Series
1500 FT	CW20-1[A] C Series
½ MILE	CW20-1[E] C Series
1 MILE	CW20-1[F] D Series

A	B	C	D	E	F	G	H	J	K	L	M	N
30	0.5	0.75	4D	2.75	2	6.705	6.705	7.005	7.004	8.606	8.605	1.875
36	0.625	0.875	5D	3.5	2.5	8.382	8.381	8.756	8.755	10.757	10.757	2.25
48	0.75	1.25	7D	4.75	3.5	11.734	11.734	12.258	12.258	15.060	15.059	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





CW20-1b[D]
PATH WORK

Distances should be in 500 ft increments:

***Alternate 3rd Line Legends**

500 FT

CW20-1[C]
D Series


1000 FT

CW20-1[B]
C Series

A	B	C	D	E	F	G	H	J	K	L	M	N
30	0.5	0.75	4D	2.75	2	6.205	6.204	7.005	7.004	8.606	8.605	1.875
36	0.625	0.875	5D	3.5	2.5	7.756	7.755	8.756	8.755	10.757	10.757	2.25

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



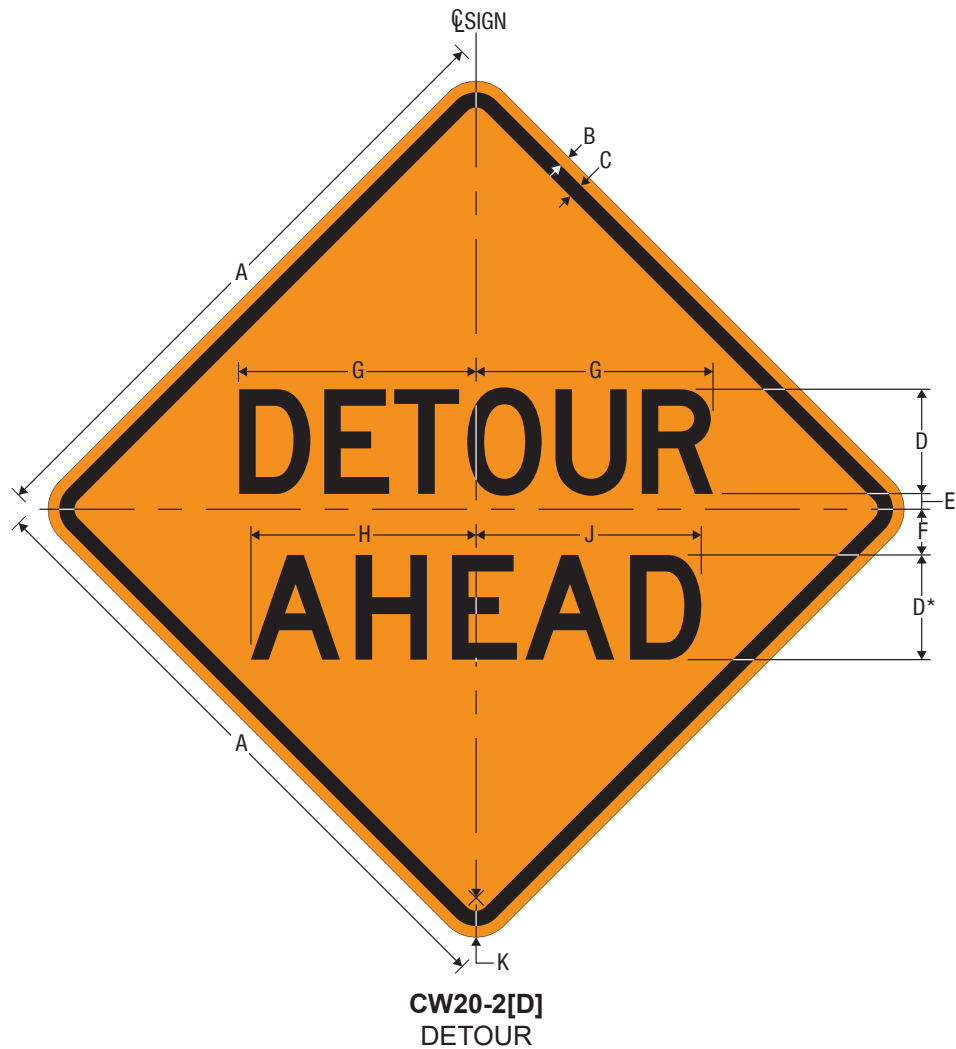

Distances should be in ½ mile or 500 ft increments:


***Alternate 2nd Line Legends**

500 FT	CW20-2[C] D Series	1/2 MILE	CW20-2[E] C Series
1000 FT	CW20-2[B] C Series	1 MILE	CW20-2[F] D Series
1500 FT	CW20-2[A] C Series		

A	B	C	D	E	F	G	H	J	K
30	0.5	0.75	5D	0.75	2.25	11.318	10.757	10.756	1.875
36	0.625	0.875	6D	0.875	2.625	13.582	12.909	12.908	2.25
48	0.75	1.25	8D	1.25	3.5	18.109	17.211	17.211	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



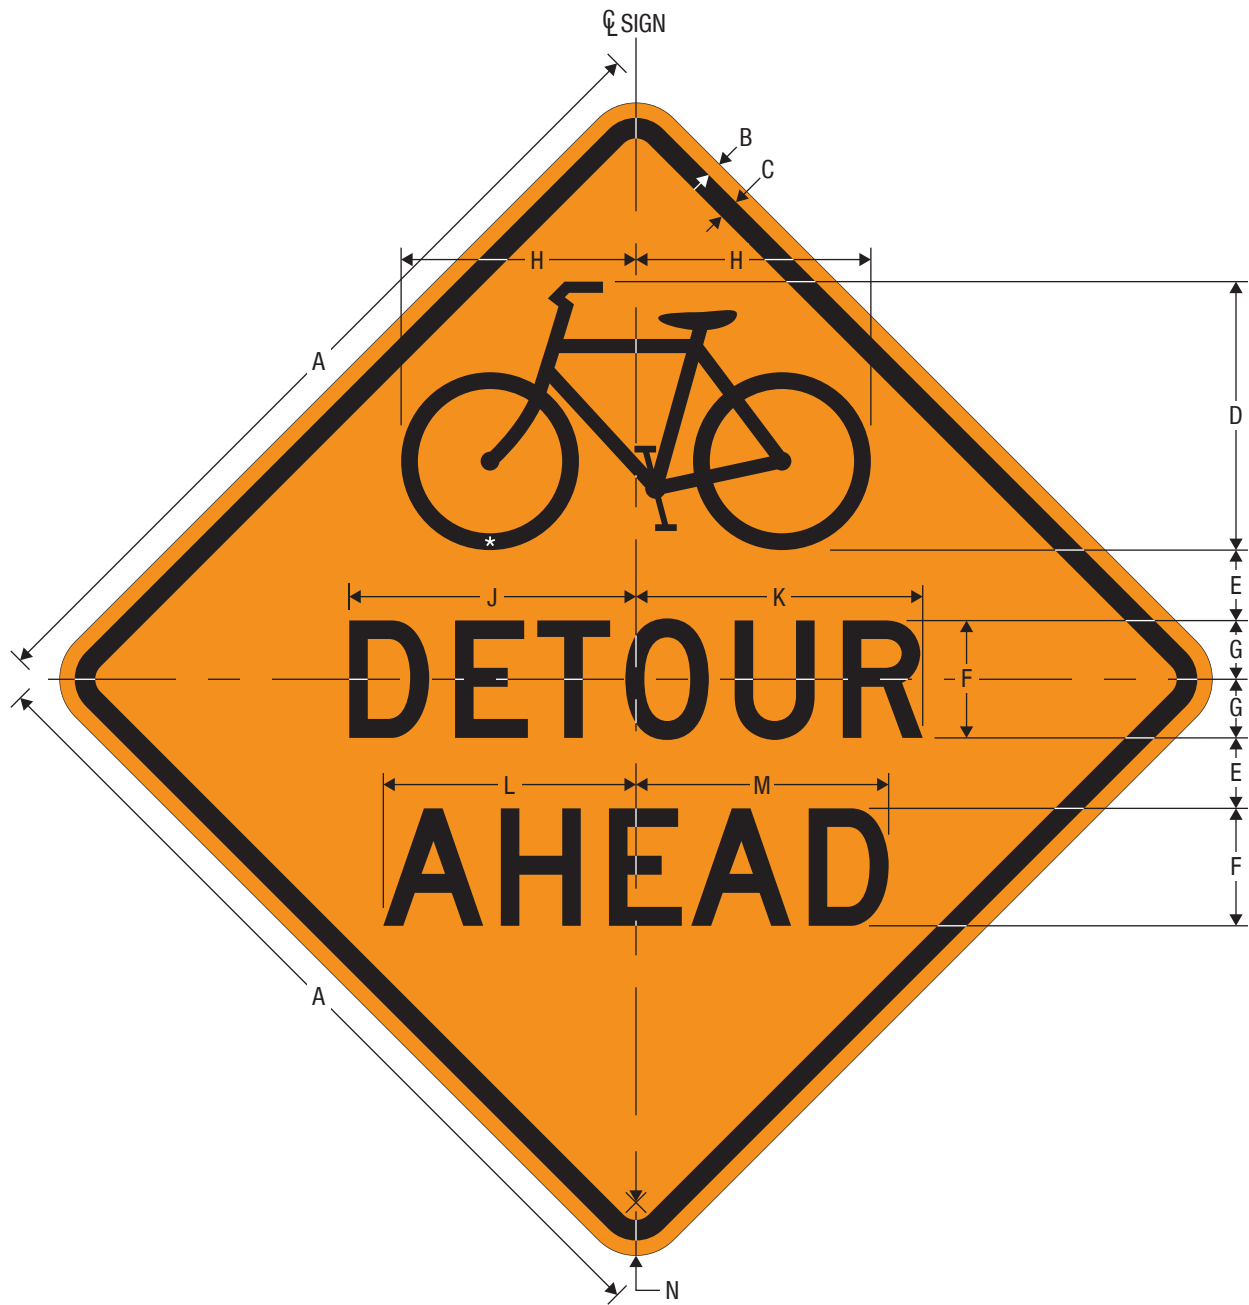


CW20-2a
Bike DETOUR

*See Section 11 for symbol design.

A	B	C	D	E	F	G	H	J	K	L	M	N
30	0.5	0.75	9.143	2.5	4D	2	8	9.767	9.766	8.606	8.605	1.875
36	0.625	0.875	11.429	3	5D	2.5	10	12.208	12.208	10.757	10.757	2.25

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

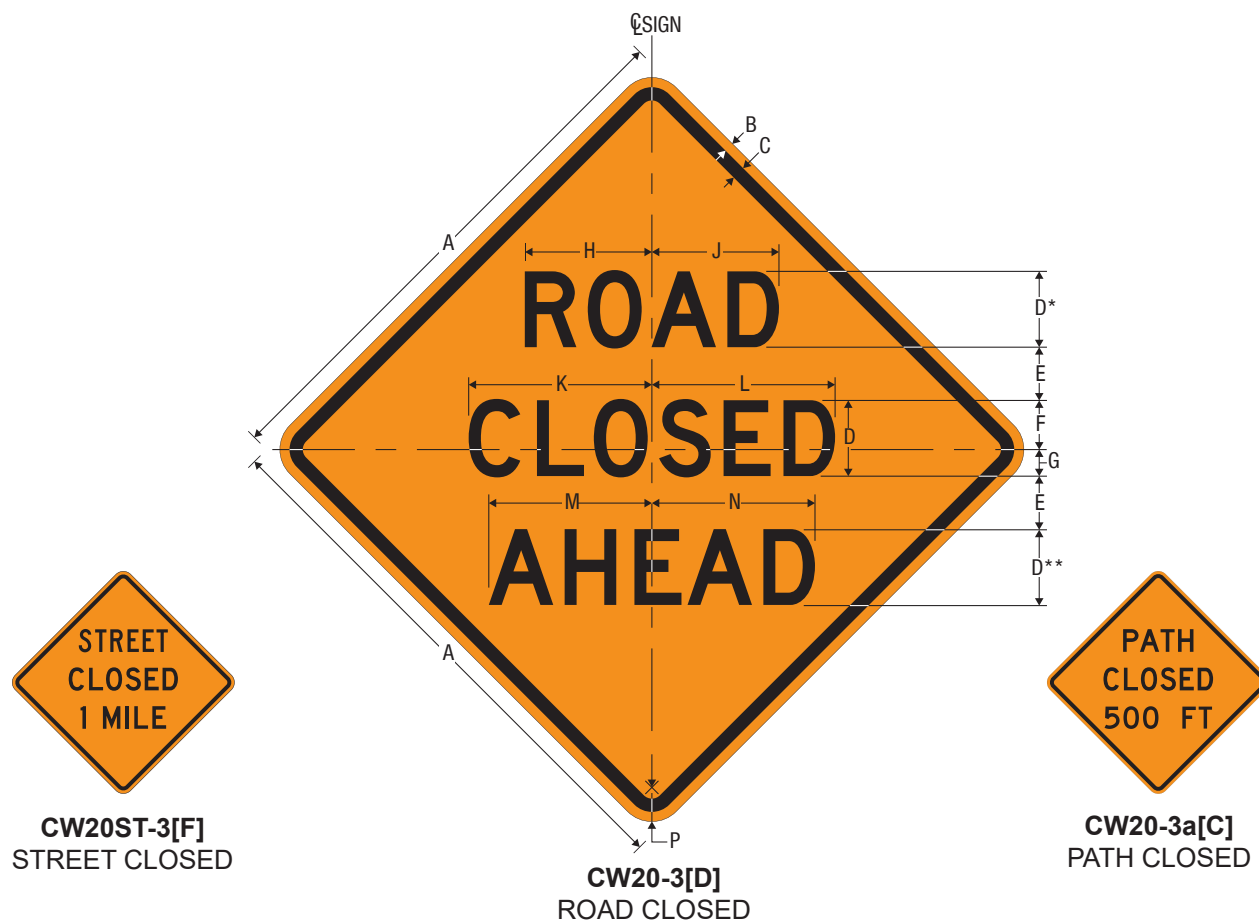

Distances should be in ½ mile or 500 ft increments:

Note: PATH CLOSED sign to be used with AHEAD and FT 3rd line alternates only.

***Alternate 1st Line Legends**

- FRWY** CW20**FY**-3 D Series
- STREET** CW20**ST**-3 C Series
- RAMP** CW20**RP**-3 D Series
- PATH** CW20-3a D Series

****Alternate 3rd Line Legends**

- 500 FT** CW20-3**[C]** D Series
- 1000 FT** CW20-3**[B]** C Series
- 1500 FT** CW20-3**[A]** C Series
- 1½ MILE** CW20-3**[E]** C Series
- 1 MILE** CW20-3**[F]** D Series

A	B	C	D	E	F	G	H	J	K	L	M	N	P
30	0.5	0.75	4D	3	2.75	1.25	6.705	6.705	9.667	9.666	8.606	8.605	1.875
36	0.625	0.875	5D	3.5	3.25	1.75	8.382	8.381	12.083	12.083	10.757	10.757	2.25
48	0.75	1.25	7D	4.75	4.5	2.5	11.734	11.734	16.917	16.916	15.060	15.059	3

COLORS:LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





CW20-4[D]
ONE LANE ROAD

Note: FT spacing in Alternate legends should be reduced 40% in 48" size only.

Distances should be in ½ mile or 500 ft increments:

***Alternate 3rd Line Legends**

500 FT	CW20-4[C] C Series	1/2 MILE	CW20-4[E] C Series
**1000 FT	CW20-4[B] C Series	1 MILE	CW20-4[F] C Series
**1500 FT	CW20-4[A] C Series		

****Reduce spacing 40%.**

A	B	C	D	E	F	G	H	J
30	0.5	0.75	4C	1.875	1	3	4C	8.323
36	0.625	0.875	5C	2.25	1.25	3.75	5C	10.404
48	0.75	1.25	7C**	3.125	1.75	5.25	7C	13.683

K	L	M	N	P	Q	R	S
2.621	0.379	10.564	5.522	5.522	7.003	7.002	1.875
3.276	0.474	13.205	6.903	6.902	8.753	8.753	2.25
4.461	0.539	17.605	9.664	9.663	12.255	12.254	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





*Reduce spacing 30%.

A	B	C	D	E	F	G
30	0.5	0.75	5C	1.25	0.9	1.875
36	0.625	0.875	6D	1.5	2	2.25
48	0.75	1.25	8D	3	2.5	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

When a CW20-5T sign is used, the distance legend should be displayed on a supplemental plaque below the sign.
Distances should be in ½ mile or 500 ft increments:



CW16-2aP

OR




CW16-3aP

1000 FT

1500 FT

1 MILE



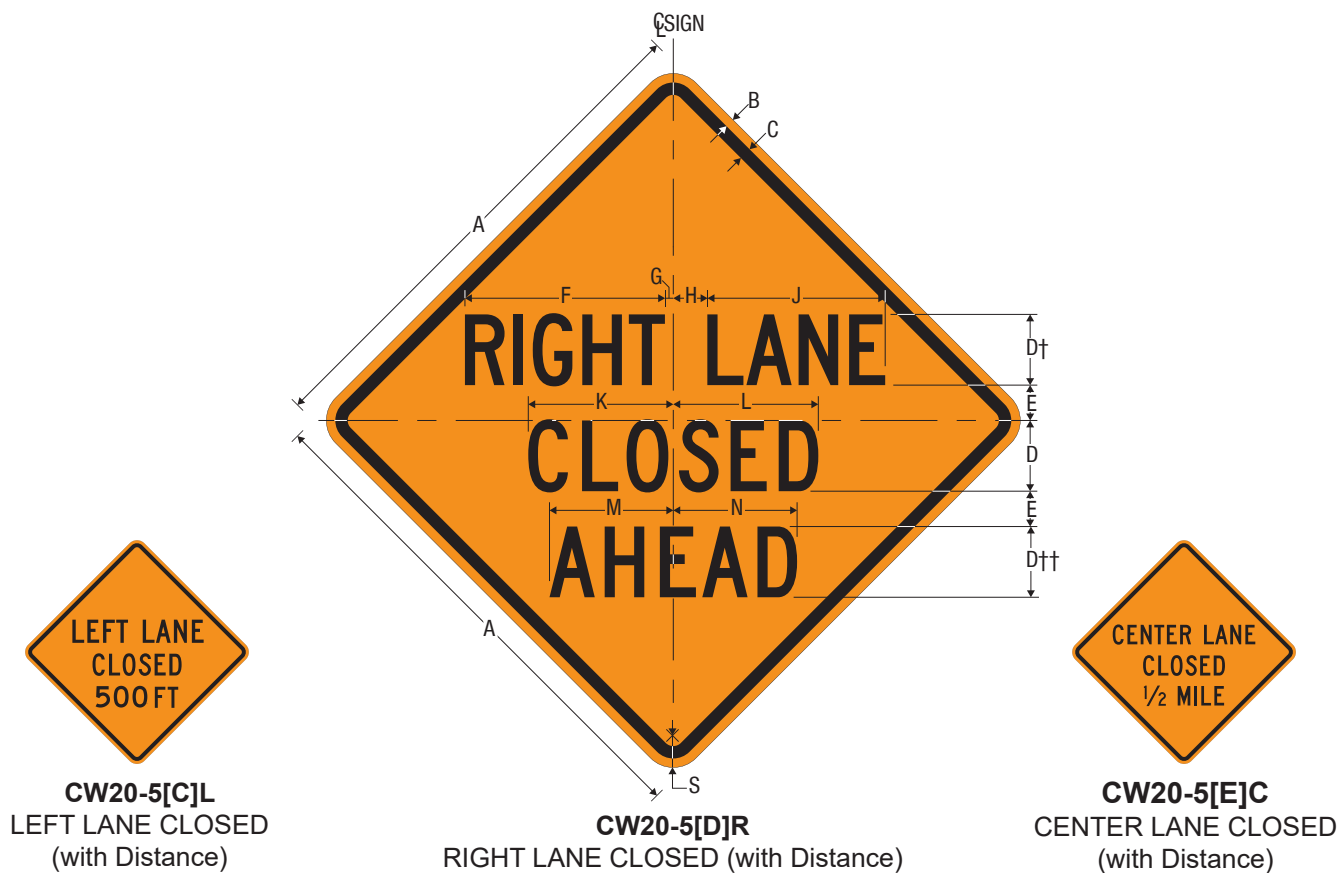

†Alternate 1st Line Legends

LEFT LANE CENTER LANE

Distances should be in 1/2 mile or 500 ft increments:

††Alternate 3rd Line Legends

500 FT CW20-5[C] D Series ** 1000 FT CW20-5[B] C Series ** 1500 FT CW20-5[A] C Series

1/2 MILE CW20-5[E] C Series 1 MILE CW20-5[F] C Series

A	B	C	D	E	F	G	H	J
30	0.5	0.75	4C	1.625	12.164*	0.700*	2.300*	10.564*
36	0.625	0.875	5C	2.5	14.140*	0.75*	2.25*	12.575*
48	0.75	1.25	6C	3.5	18.246	1.050	3.450	15.846

Note: 1000 FT and 1500 FT alternates should be reduced 40% in 36" and 48" sizes only.

K	L	M	N	P	Q	R	S
8.203	8.203	7.003	7.002	11.604	13.420**	13.280**	1.875
10.254	10.254	8.753	8.753	14.5*	16.25***	15.75***	2.25
12.305	12.304	10.504	10.504	17.438	19.342**	19.375**	3


*Reduce spacing 30%.

**Reduce spacing 40%.

***Reduce spacing 50%.

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



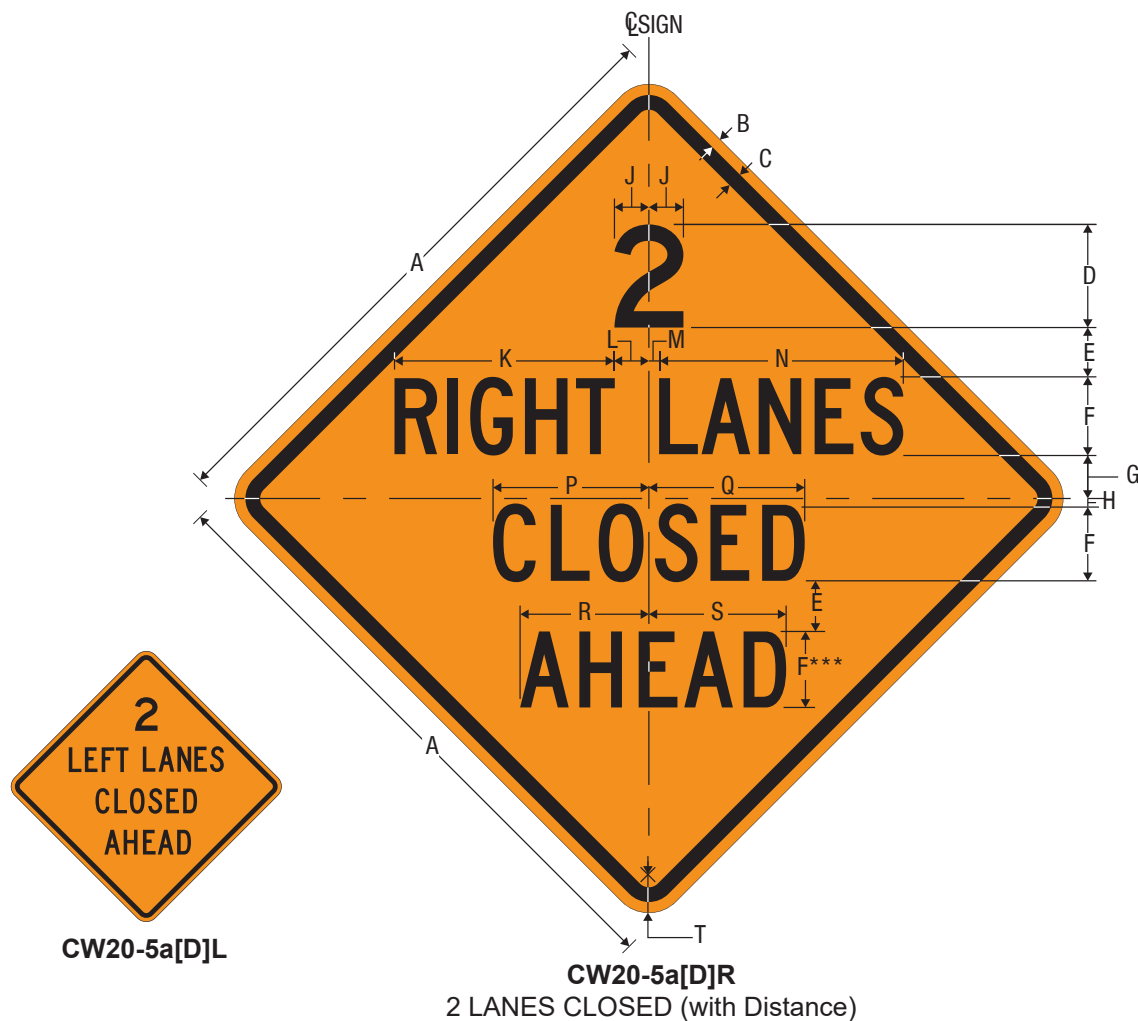

Distances should be in ½ mile or 500 ft increments:

***Alternate 3rd Line Legends

500 FT CW20-5a[C]
D Series

**** 1000 FT** CW20-5a[B]
C Series

**** 1500 FT** CW20-5a[A]
C Series

1/2 MILE CW20-5a[E]
C Series

1 MILE CW20-5a[F]
C Series

*Reduce spacing 20%.

**Reduce spacing 40%.

A	B	C	D	E	F	G	H	J
30	0.5	0.75	5D	2.5	3.75C	2.375	0.125	VAR
36	0.625	0.875	6D	3	4.5C	2.625	0.375	VAR
48	0.75	1.25	8D	4	6C	3.5	0.5	VAR

K	L	M	N	P	Q	R	S	T
10.87*	1.684*	0.504*	12.050*	7.691	7.690	6.315	6.815	1.875
13.046*	2.020*	0.605*	14.460*	9.229	9.228	7.628	8.128	2.25
17.39*	2.693*	0.807*	19.280*	12.305	12.304	10.258	10.75	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





A	B	C	D	E	F	G	H	J	K	L
30	0.5	0.75	5D	3	4.25C	2.81	1.875	12.417	4.25	13.61
36	0.625	0.875	6D	4	5.25C	2.4	2.25	15.339	5.25	16.82
48	0.75	1.25	8D	5	7C	4.37	3	20.452	7	22.42

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





CW20-5b[D]
BIKE LANE CLOSED (with Distance)

Distances should be in 500 ft increments:


***Alternate 3rd Line Legends**

500 FT CW20-5b[C]
D Series

1000 FT CW20-5b[B]
C Series

A	B	C	D	E	F	G	H	J	K	L	M	N
30	0.5	0.75	4 C	2.25	9.323	2.121	0.879	10.564	8.203	6.753	7.252	1.875
36	0.625	0.875	5 C	2.75	11.654	2.651	1.094	13.205	10.254	8.378	9.128	2.25


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

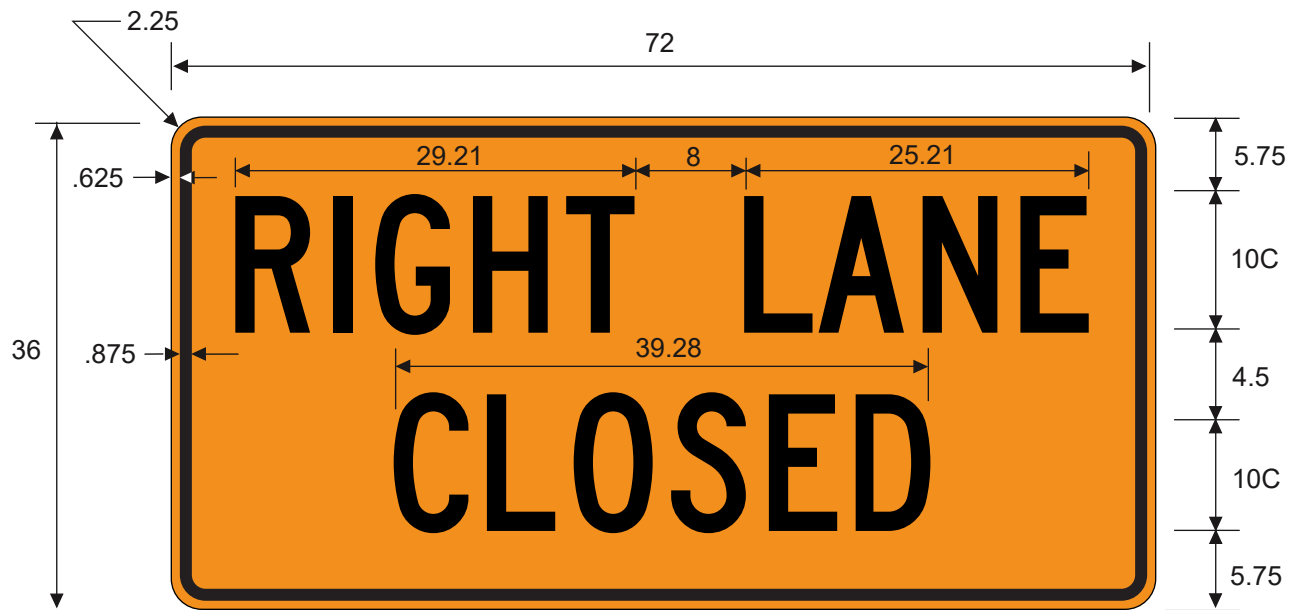

CW20-5cTR
RIGHT LANE CLOSED




CW20-5cTL
LEFT LANE CLOSED

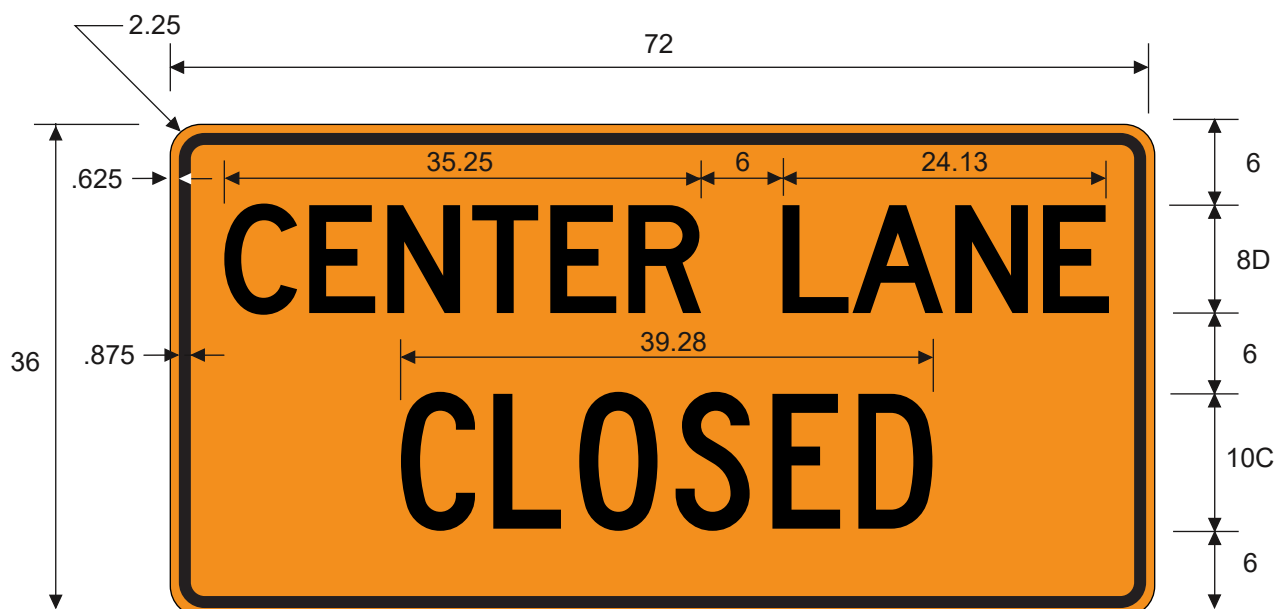

CW20-5dT
CENTER LANE CLOSED


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



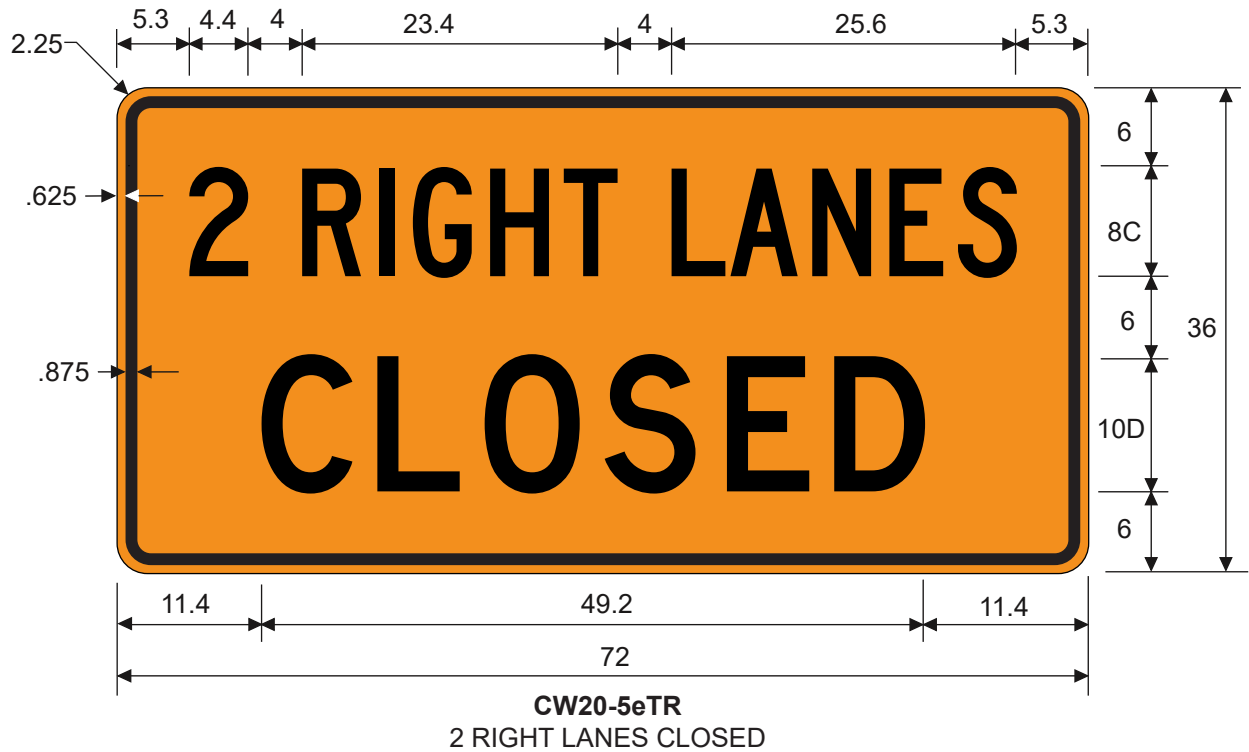

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



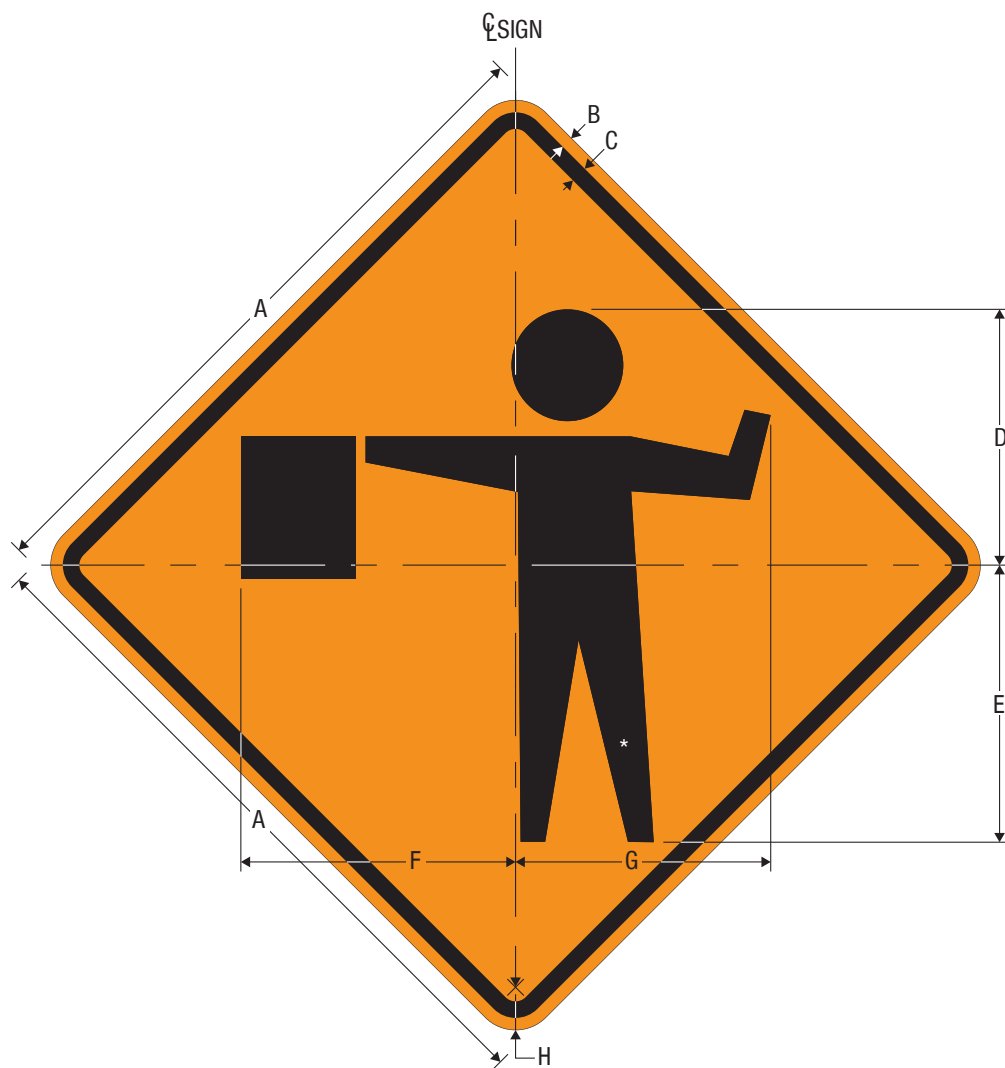

**CW20-7
FLAGGER**




CW16-2P

*See Section 11 for symbol design.

A	B	C	D	E	F	G	H
30	0.5	0.75	11.25	12.125	12	11.243	1.875
36	0.625	0.875	13.5	14.625	14.5	13.467	2.25
48	0.75	1.25	18	19.5	19.25	18.038	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

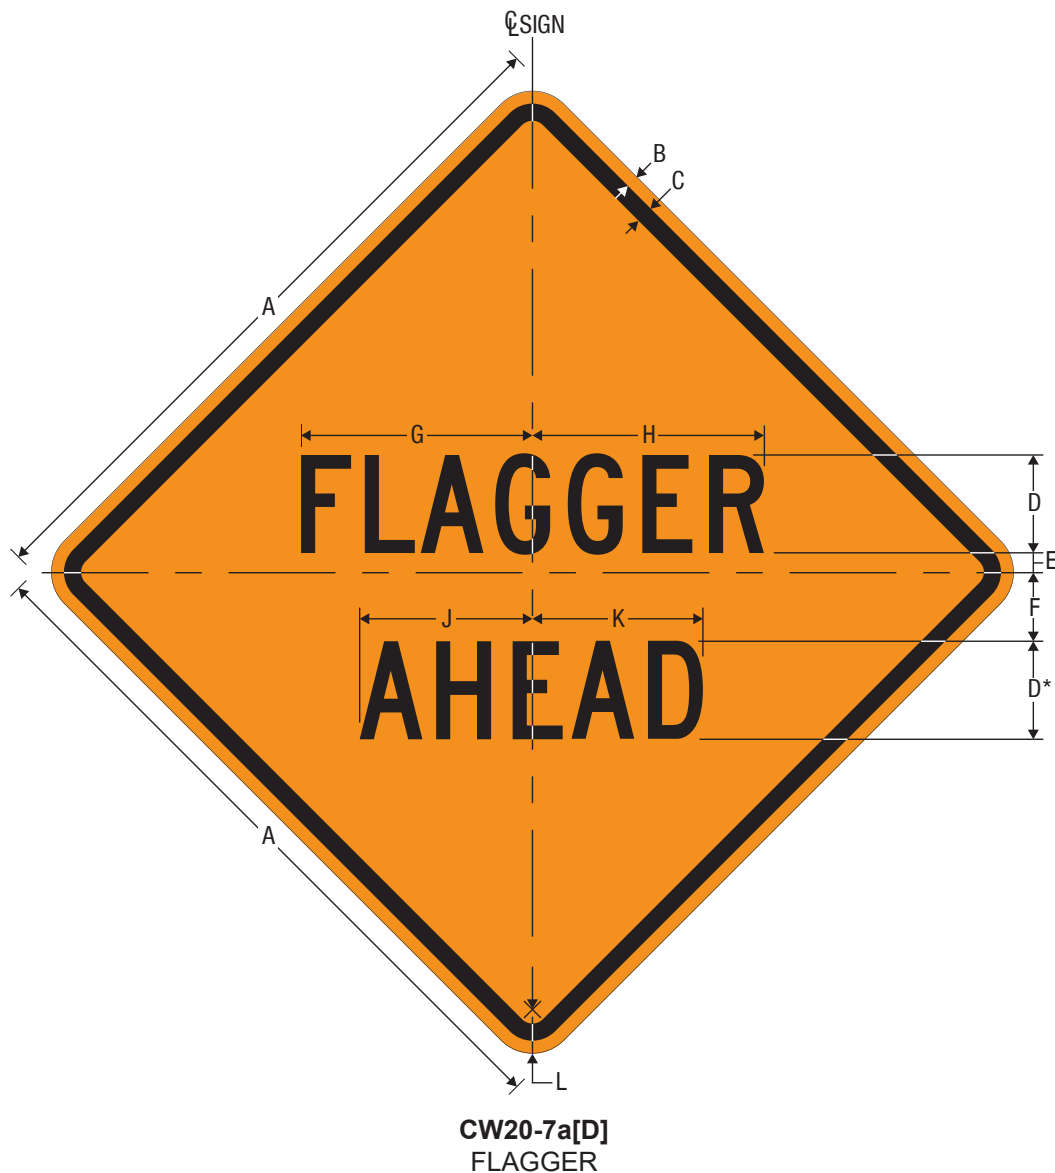

Distances should be in ½ mile or 500 ft increments:


***Alternate 2nd Line Legends**

500 FT	CW20-7a[C] D Series	1000 FT	CW20-7a[B] C Series	1500 FT	CW20-7a[A] C Series
½ MILE	CW20-7a[E] C Series	1 MILE	CW20-7a[F] C Series		


A	B	C	D	E	F	G	H	J	K	L
30	0.5	0.75	4C	0.875	2.875	9.444	9.443	7.003	7.002	1.875
36	0.625	0.875	5C	1	3.5	11.805	11.804	8.753	8.753	2.25
48	0.75	1.25	7C	2.5	3.75	16.526	16.526	12.255	12.254	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



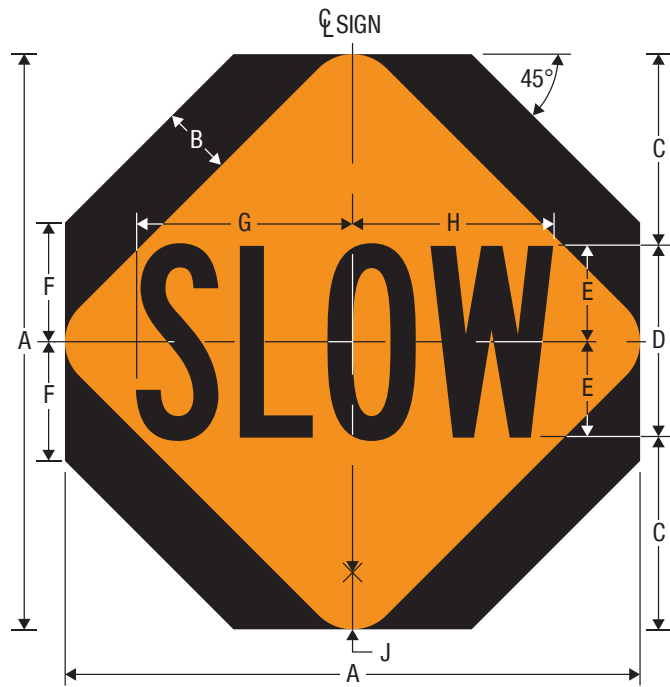

CW20-8
SLOW (On Stop/Slow Paddle)

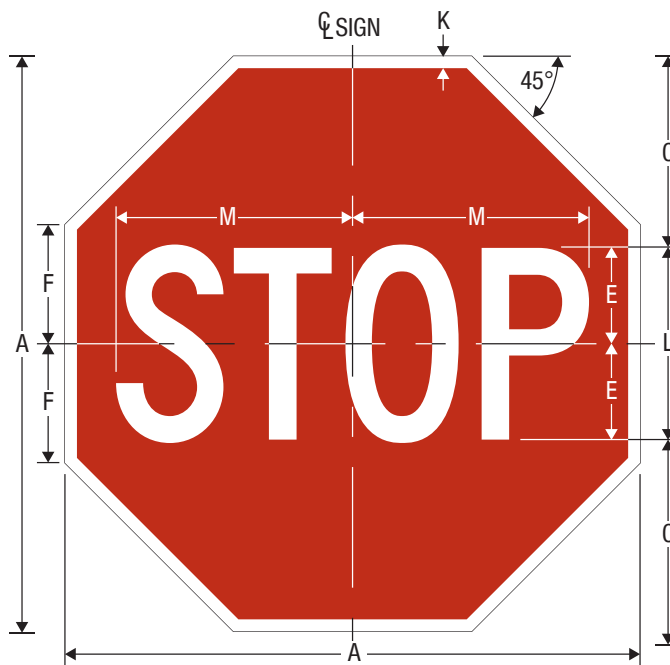

[R1-1]
STOP (On Stop/Slow Paddle)


*Reduce spacing 30%.

**Reduce spacing 40%.

A	B	C	D	E	F	G	H	J	K	L	M
18	2.197	6	6B*	3	3.728	6.781	6.281	1.5	0.375	6C**	7.401

SLOW
COLORS: LEGEND, AREA OUTSIDE DIAMOND - BLACK
BACKGROUND - ORANGE

STOP
COLORS: LEGEND, BORDER - WHITE
BACKGROUND - RED

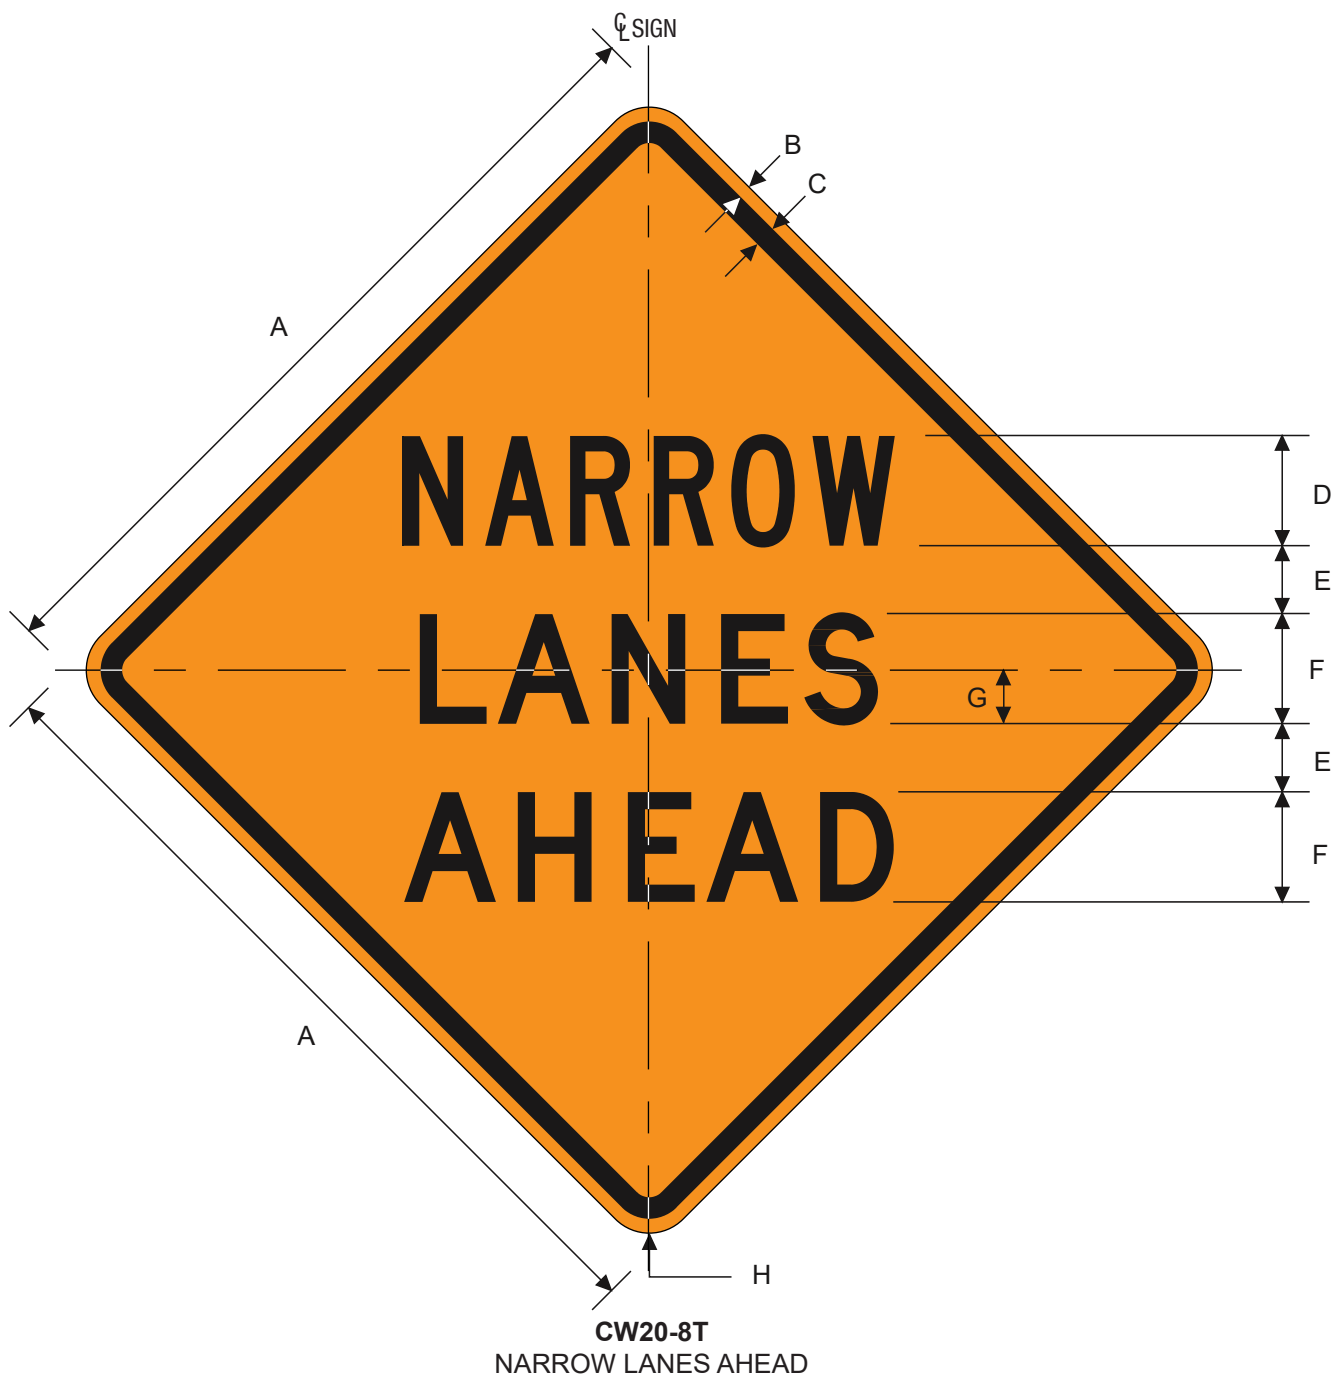

A	B	C	D	E	F	G	H
36	.625	.875	5C	3	5D	2.5	2.25
48	.75	1.25	6C	4.5	6D	2.75	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE






CW21-1
WORKERS

*See Section 11 for symbol design.

A	B	C	D	E	F	G	H
30	0.5	0.75	14	10	8.875	12.229	1.875
36	0.625	0.875	16.875	12	10.75	14.641	2.25
48	0.75	1.25	22.375	16	14.25	19.495	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

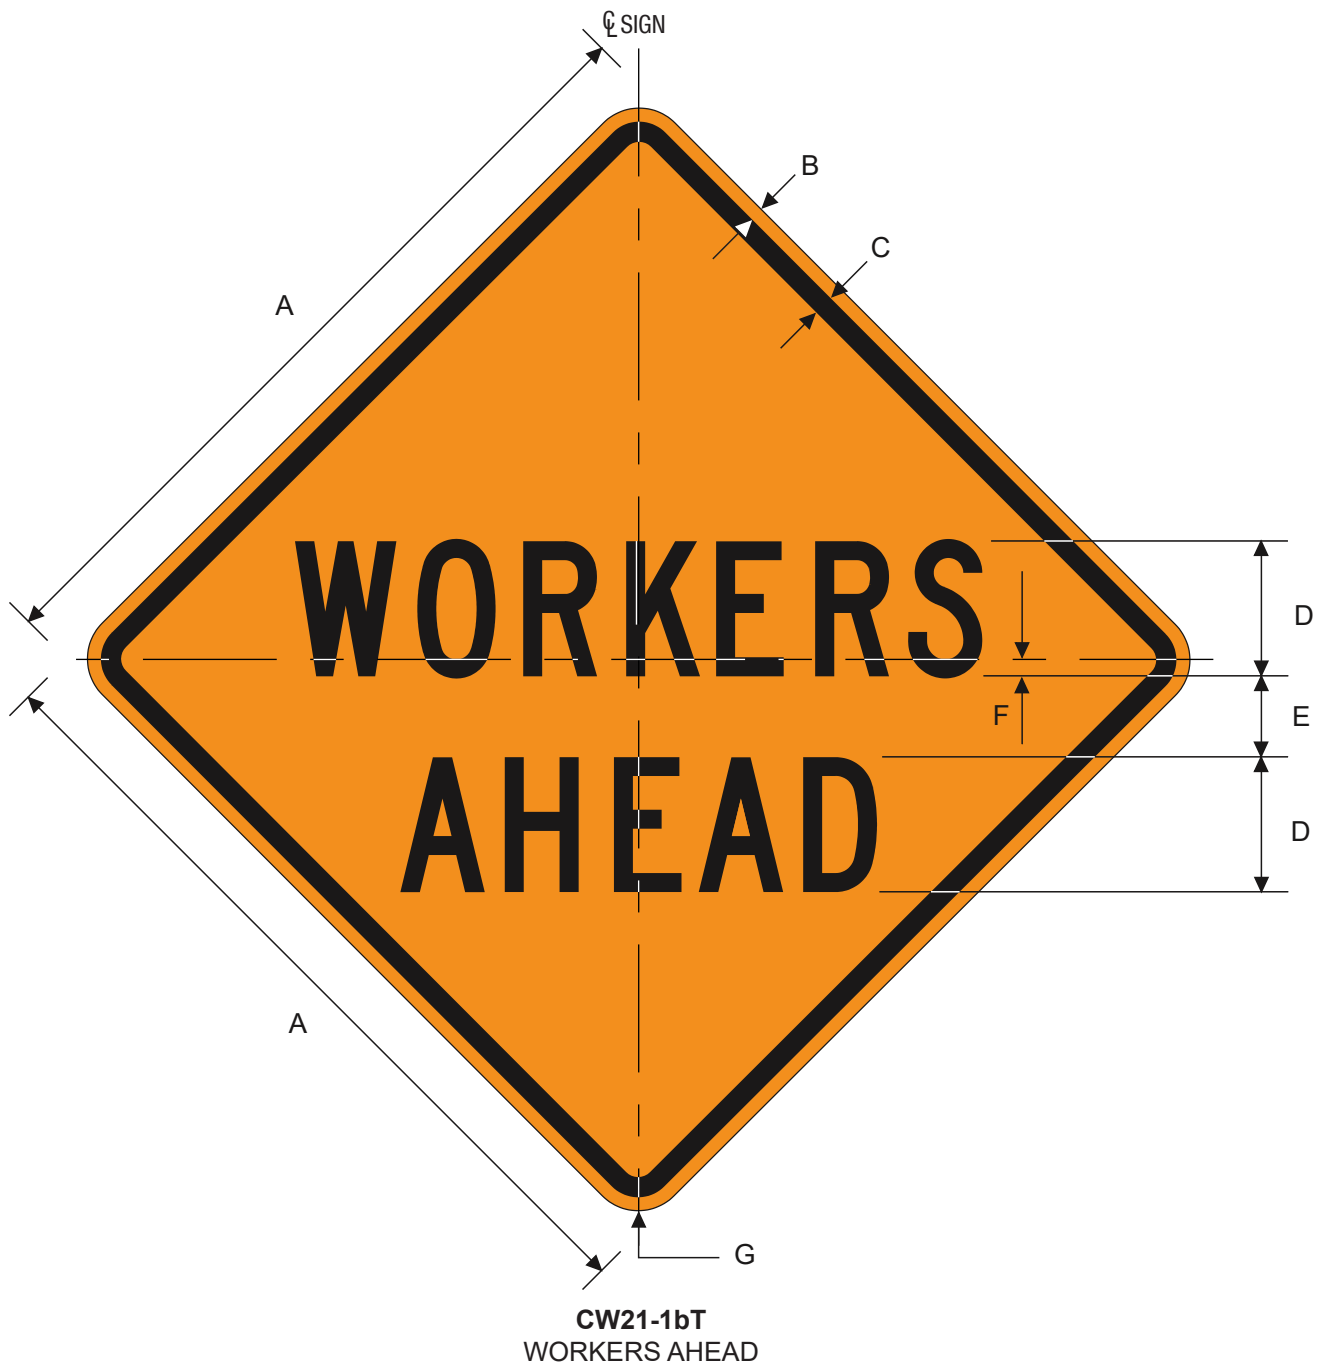

A	B	C	D	E	F	G
30	0.5	0.75	5C	3	0.625	1.875
36	0.625	0.875	6C	3.5	0.75	2.25
48	0.75	1.25	8C	4	1	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





CW21-1T
GIVE US A BRAKE (with Symbol)

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





A	B	C	D	E	F	G	H	J	K	L	M
30	0.5	0.75	6D	4	11.619	11.618	5.853	5.852	1.875	7.085	7.084
36	0.625	0.875	7D	5	13.555	13.554	6.828	6.827	2.25	8.266	8.265
48	0.75	1.25	8D	6	15.491	15.491	7.803	7.803	3	9.446	9.446

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



CW21-3[D]
ROAD MACHINERY AHEAD

Distances should be in ½ mile or 500 ft increments:

****Alternate 3rd Line Legends**


500 FT	CW21-3[C] D Series	1/2 MILE	CW21-3[E] C Series
*1000 FT	CW21-3[B] C Series	1 MILE	CW21-3[F] D Series
*1500 FT	CW21-3[A] C Series		

*Reduce Spacing 40%.

A	B	C	D	E	F	G	H	J	K	L	M	N	P
30	0.5	0.75	4 D	3.5	4D*	2	6.705	6.705	13.754	13.753	8.606	8.605	1.875
36	0.625	0.875	5 D	4	5D*	2.5	8.382	8.381	17.192	17.192	10.757	10.757	2.25
48	0.75	1.25	7 D	3.5	7D*	3.5	11.734	11.734	24.069	24.068	15.060	15.059	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE




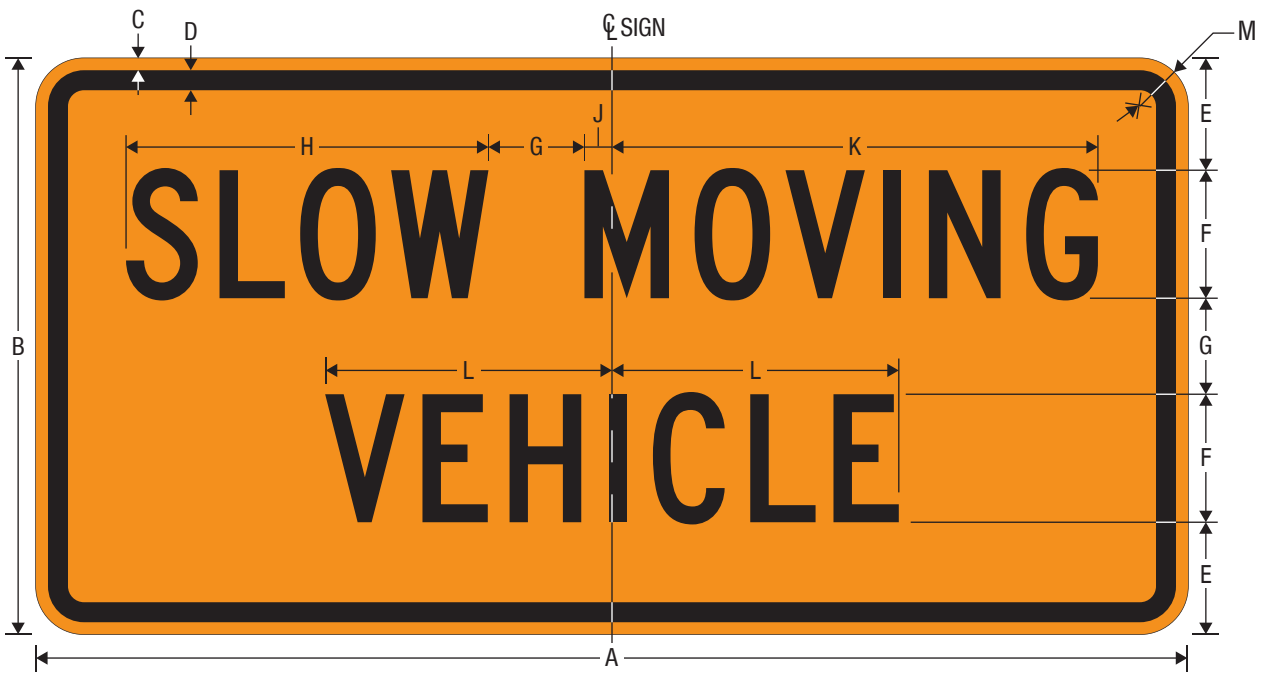

CW21-4
SLOW MOVING VEHICLE

A	B	C	D	E	F	G	H	J	K	L	M
36	18	0.375	0.625	3.5	4 C	3	11.325	0.861	15.185	8.963	1.5

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

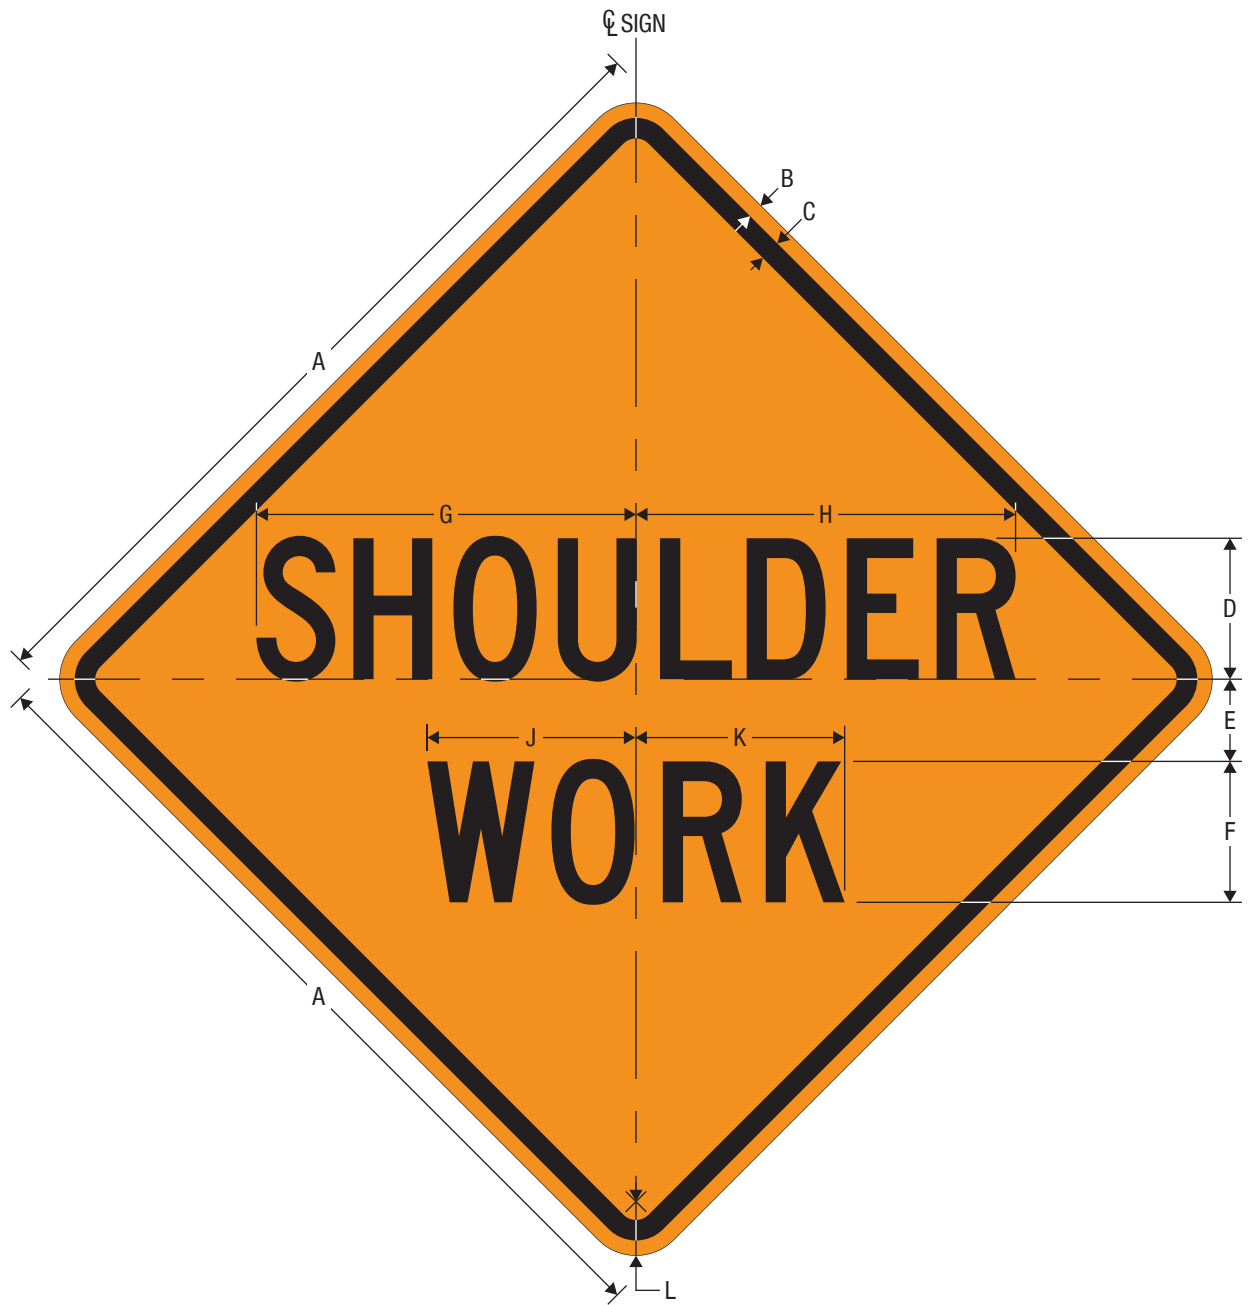


CW21-5
SHOULDER WORK

*Reduce spacing 25%.


A	B	C	D	E	F	G	H	J	K	L
30	0.5	0.75	5C*	3	5C	13.468	13.467	7.403	7.403	1.875
36	0.625	0.875	6C*	3.5	6C	16.161	16.161	8.884	8.884	2.25
48	0.75	1.25	8C*	5	8C	21.42	21.42	11.45	11.45	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

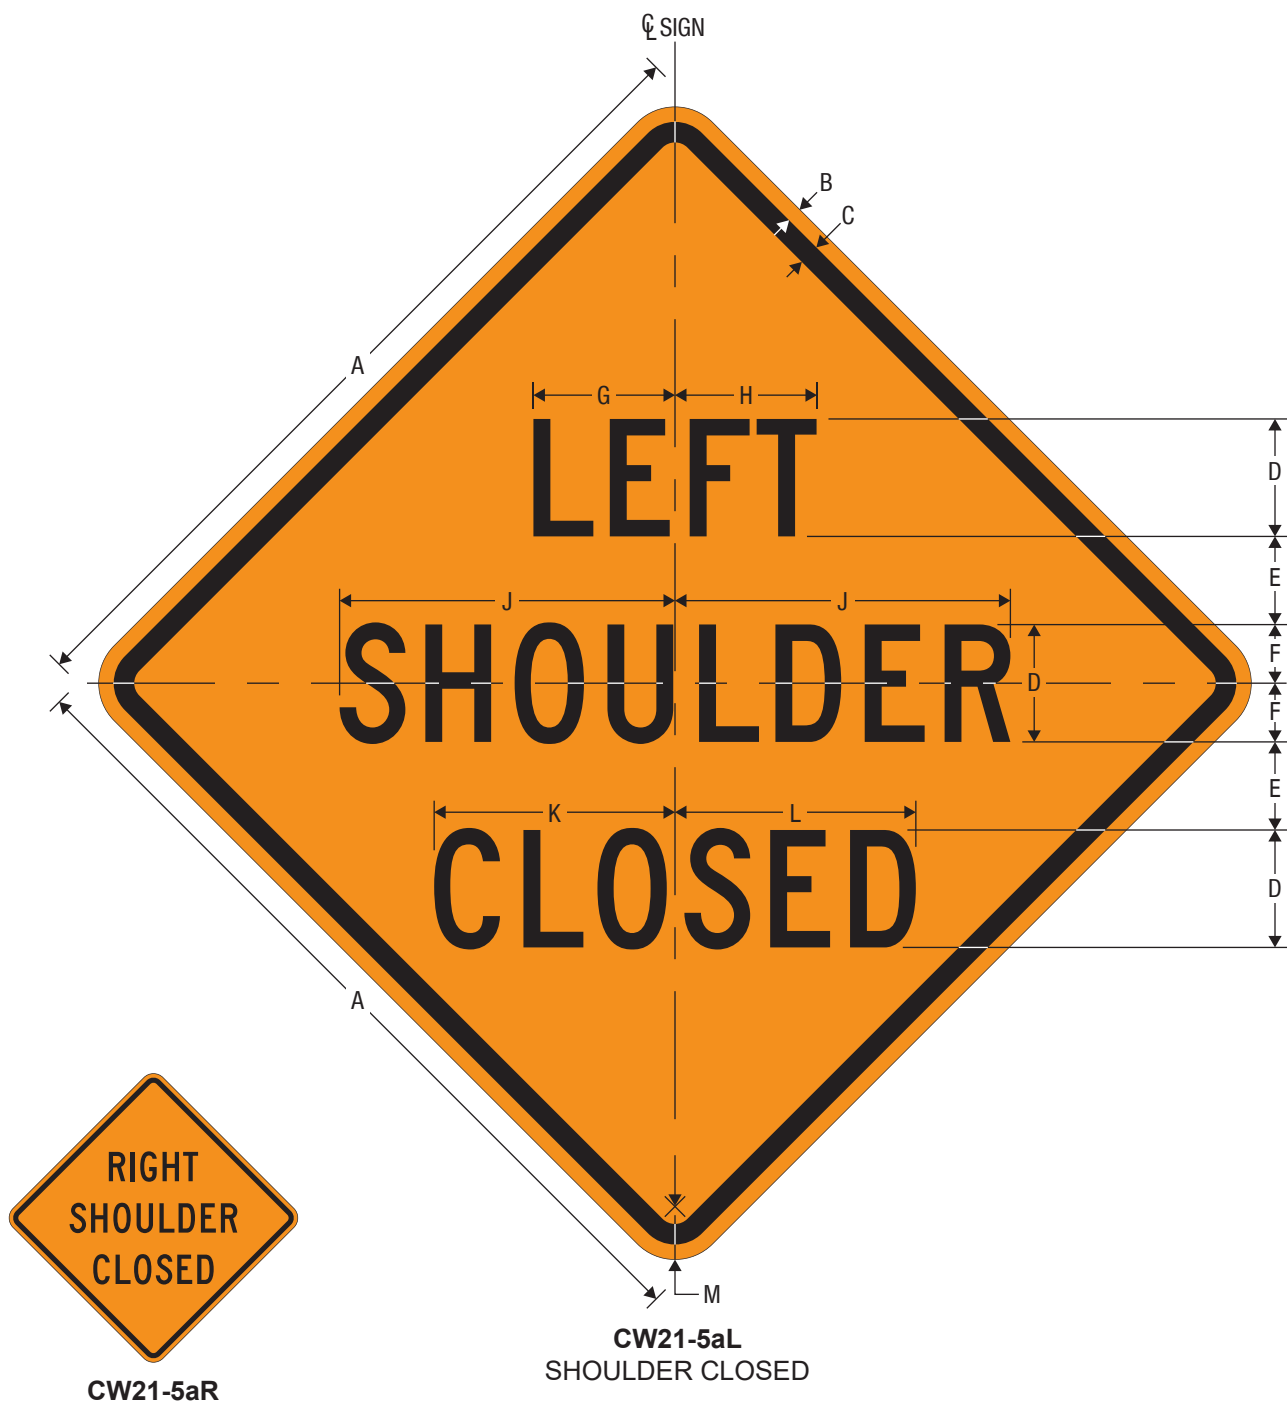

A	B	C	D	E	F	G	H	J	K	L	M
30	0.5	0.75	4C	2.75	2	4.822	4.822	11.424	8.203	8.203	1.875
36	0.625	0.875	5C	3.75	2.5	6.028	6.027	14.280	10.254	10.254	2.25
48	0.75	1.25	7C	4.75	3.5	8.439	8.438	19.992	14.356	14.355	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

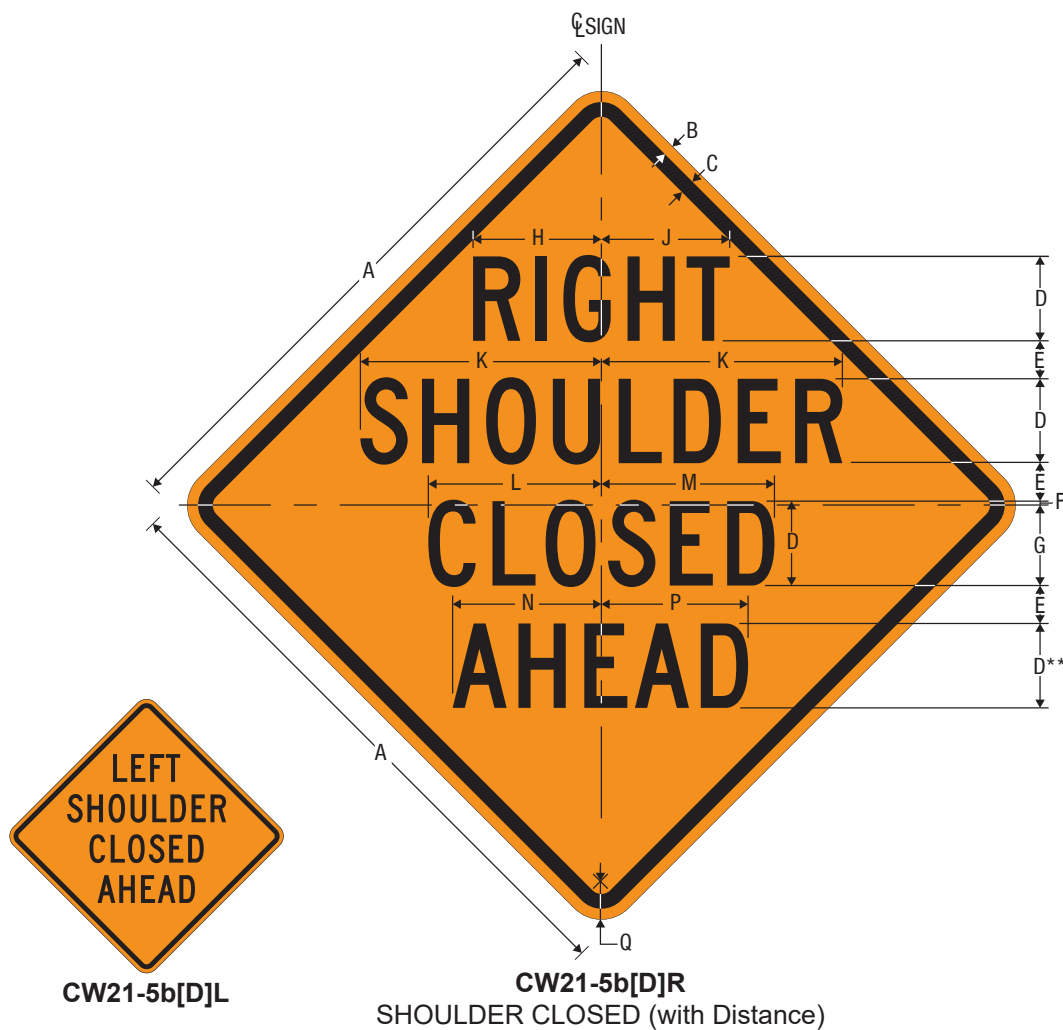

Distances should be in ½ mile or 500 ft increments:

****Alternate 4th Line Legends**

500 FT CW21-5b[C] D Series * **1000 FT** CW21-5b[B] C Series * **1500 FT** CW21-5b[A] C Series

½ MILE CW21-5b[E] C Series **1 MILE** CW21-5b[F] C Series

*Reduce spacing 40%.

A	B	C	D	E	F	G	H
30	0.5	0.75	4C	2	0.25	3.75	6.082
36	0.625	0.875	5C	2.25	0.25	4.75	7.603
48	0.75	1.25	6C	3	0.25	5.75	9.123

J	K	L	M	N	P	Q
6.082	11.424	8.203	8.203	7.003	7.002	1.875
7.602	14.280	10.254	10.254	8.753	8.753	2.25
9.123	17.136	12.305	12.305	10.504	10.504	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





CW21-6
SURVEY CREW

A	B	C	D	E	F	G	H	J	K
30	0.5	0.75	5D	3	12.509	12.509	8.356	8.355	1.875
36	0.625	0.875	6D	3.5	15.011	15.010	10.027	10.027	2.25
48	0.75	1.25	8D	4.75	20.014	20.014	13.369	13.369	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

When a CW21-6 sign is used, the distance legend may be displayed on a supplemental plaque below the sign.



CW16-2aP

OR




CW16-3aP

1000 FT

1500 FT

1 MILE

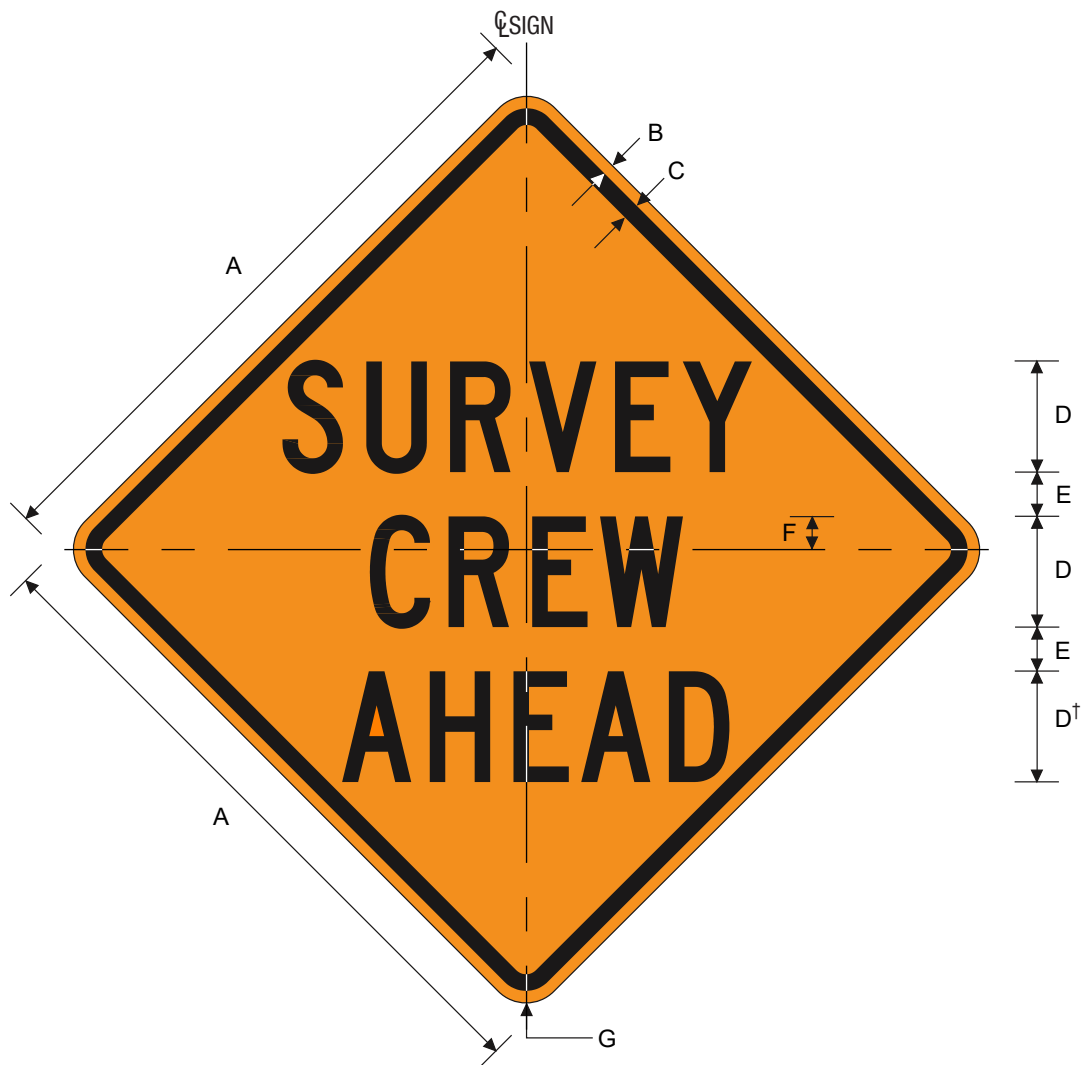

CW21-6T[D]
SURVEY CREW (with Distance)

Distances should be in ½ mile or 500 ft increments:

†Alternate 3rd Line Legends

****500 FT**

CW21-6T[C]
D Series

*****1/2 MILE**

CW21-6T[E]
C Series

***1000 FT**

CW21-6T[B]
C Series

*****1 MILE**

CW21-6T[F]
D Series

***1500 FT**

CW21-6T[A]
C Series

A	B	C	D	E	F	G
30	0.5	0.75	5C	2	1.5	1.875
36	0.625	0.875	6C	2.5	2	2.25
48	0.75	1.25	8C	3	2.5	3


*Reduce Spacing 40%.

**Reduce Spacing 50%.

***Reduce Spacing 60%.

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



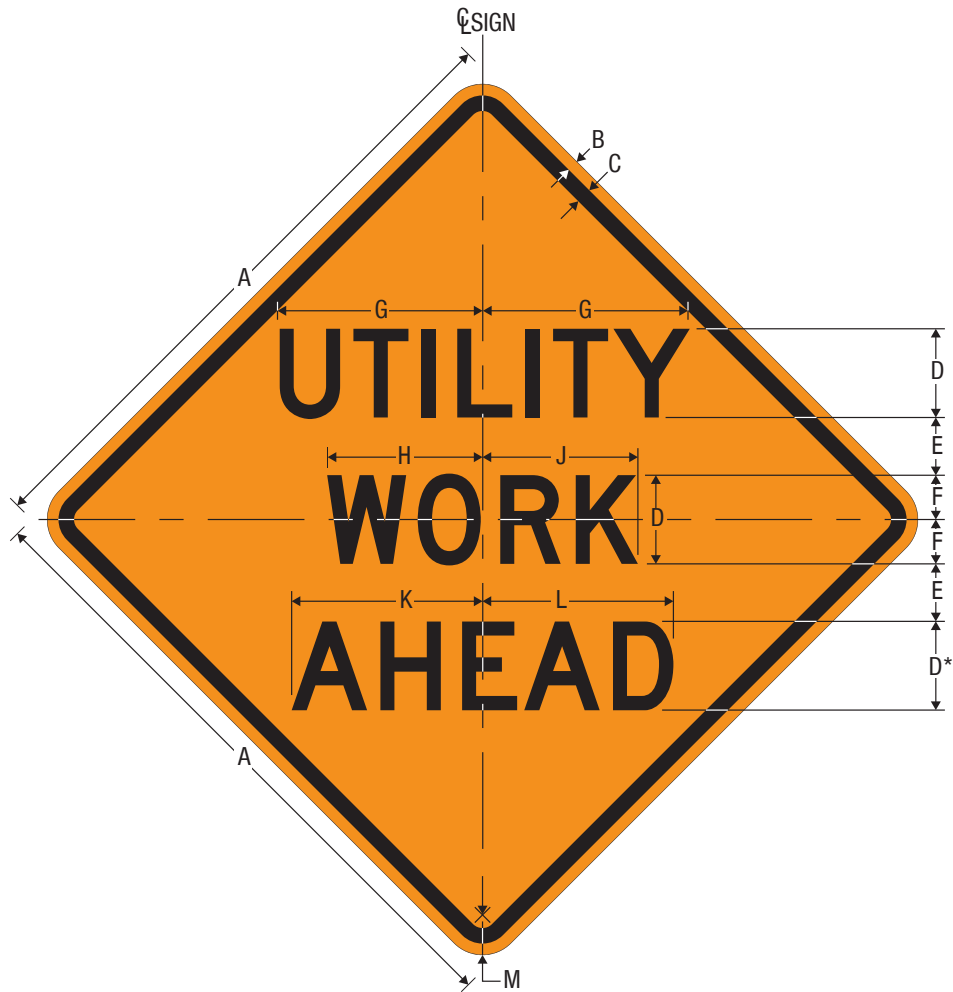

CW21-7[D]
UTILITY WORK (with Distance)

Distances should be in ½ mile or 500 ft increments:

***Alternate 3rd Line Legends**

500 FT CW21-7[C]
D Series

1000 FT CW21-7[B]
C Series

1500 FT CW21-7[A]
C Series

1/2 MILE CW21-7[E]
C Series

1 MILE CW21-7[F]
D Series

A	B	C	D	E	F	G	H	J	K	L	M
30	0.5	0.75	4D	2.75	2	9.244	7.005	7.004	8.606	8.605	1.875
36	0.625	0.875	5D	3.25	2.5	11.555	8.756	8.755	10.757	10.757	2.25
48	0.75	1.25	7D	3.75	3.5	14.602	12.258	12.258	15.060	15.059	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE






CW21-8T
DRONES OPERATING IN AREA

A	B	C	D	E	F	G	H	J	K	L	M	N
36	.625	.875	5D	2.5	11.885	16.31	5.31	3.5	4.345	13.15	1.994	2.25
48	.750	1.250	7D	3	16.83	23.71	6.45	3	6.38	15.83	4	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE




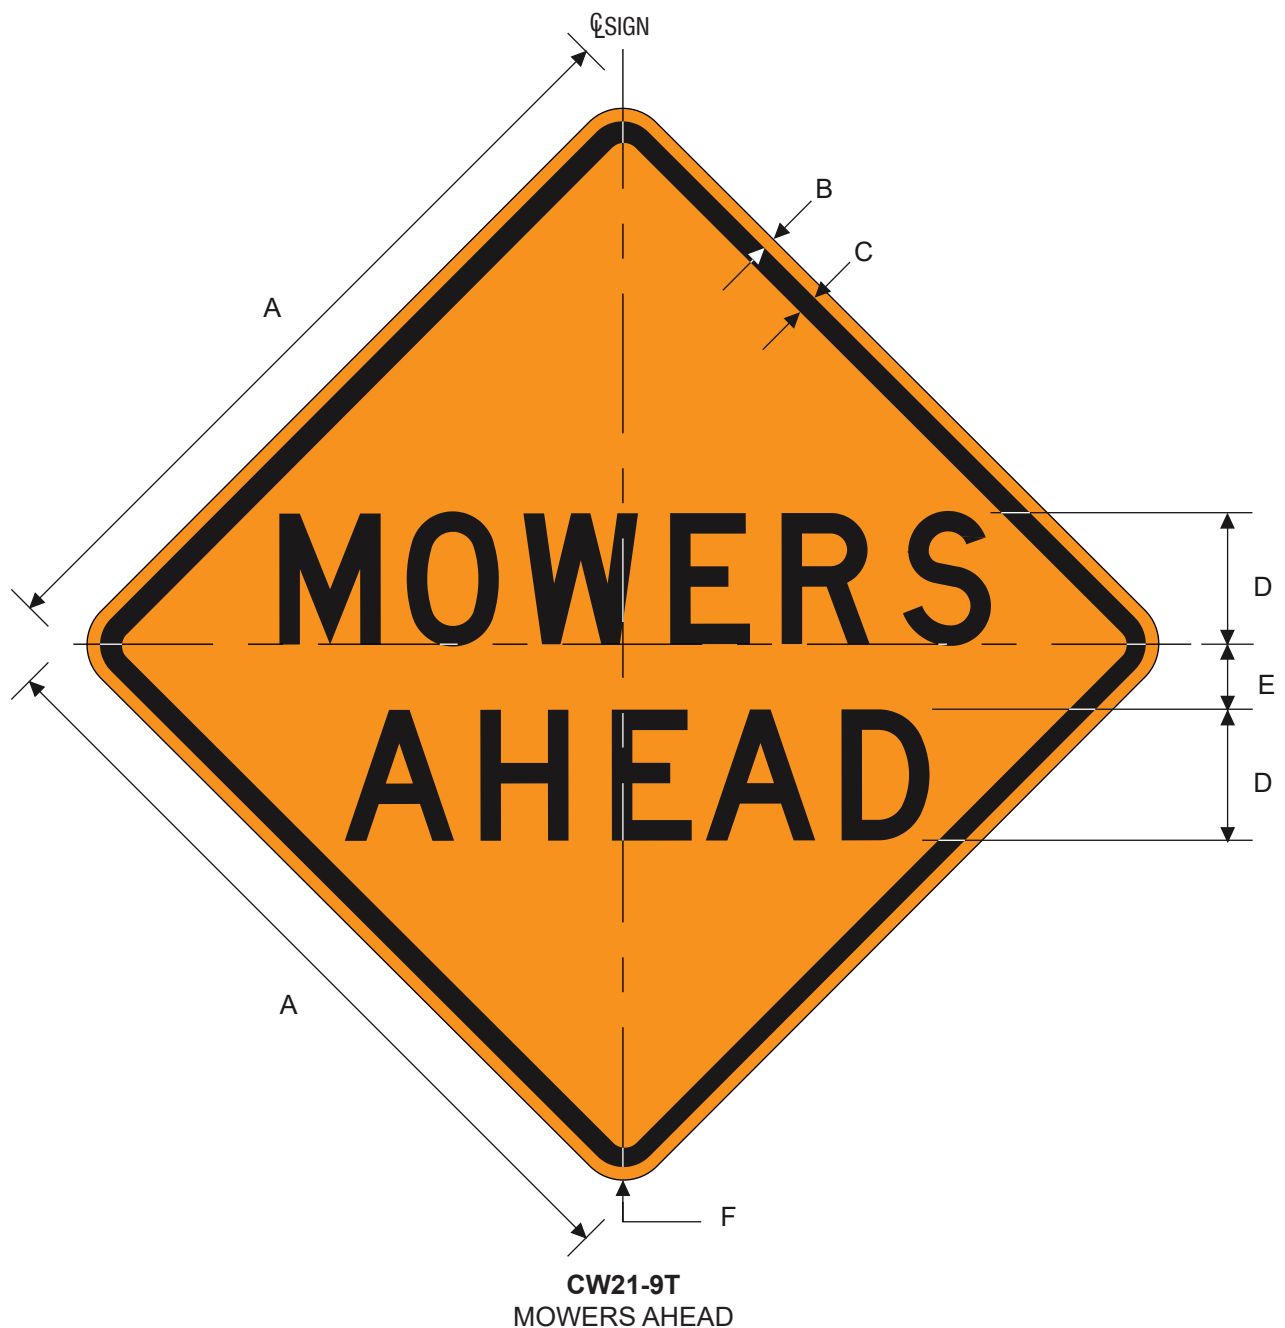

A	B	C	D	E	F
30	.5	.75	5D	2.5	1.875
36	.625	.875	6D	3	2.25
48	.75	1.25	8D	4	3


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



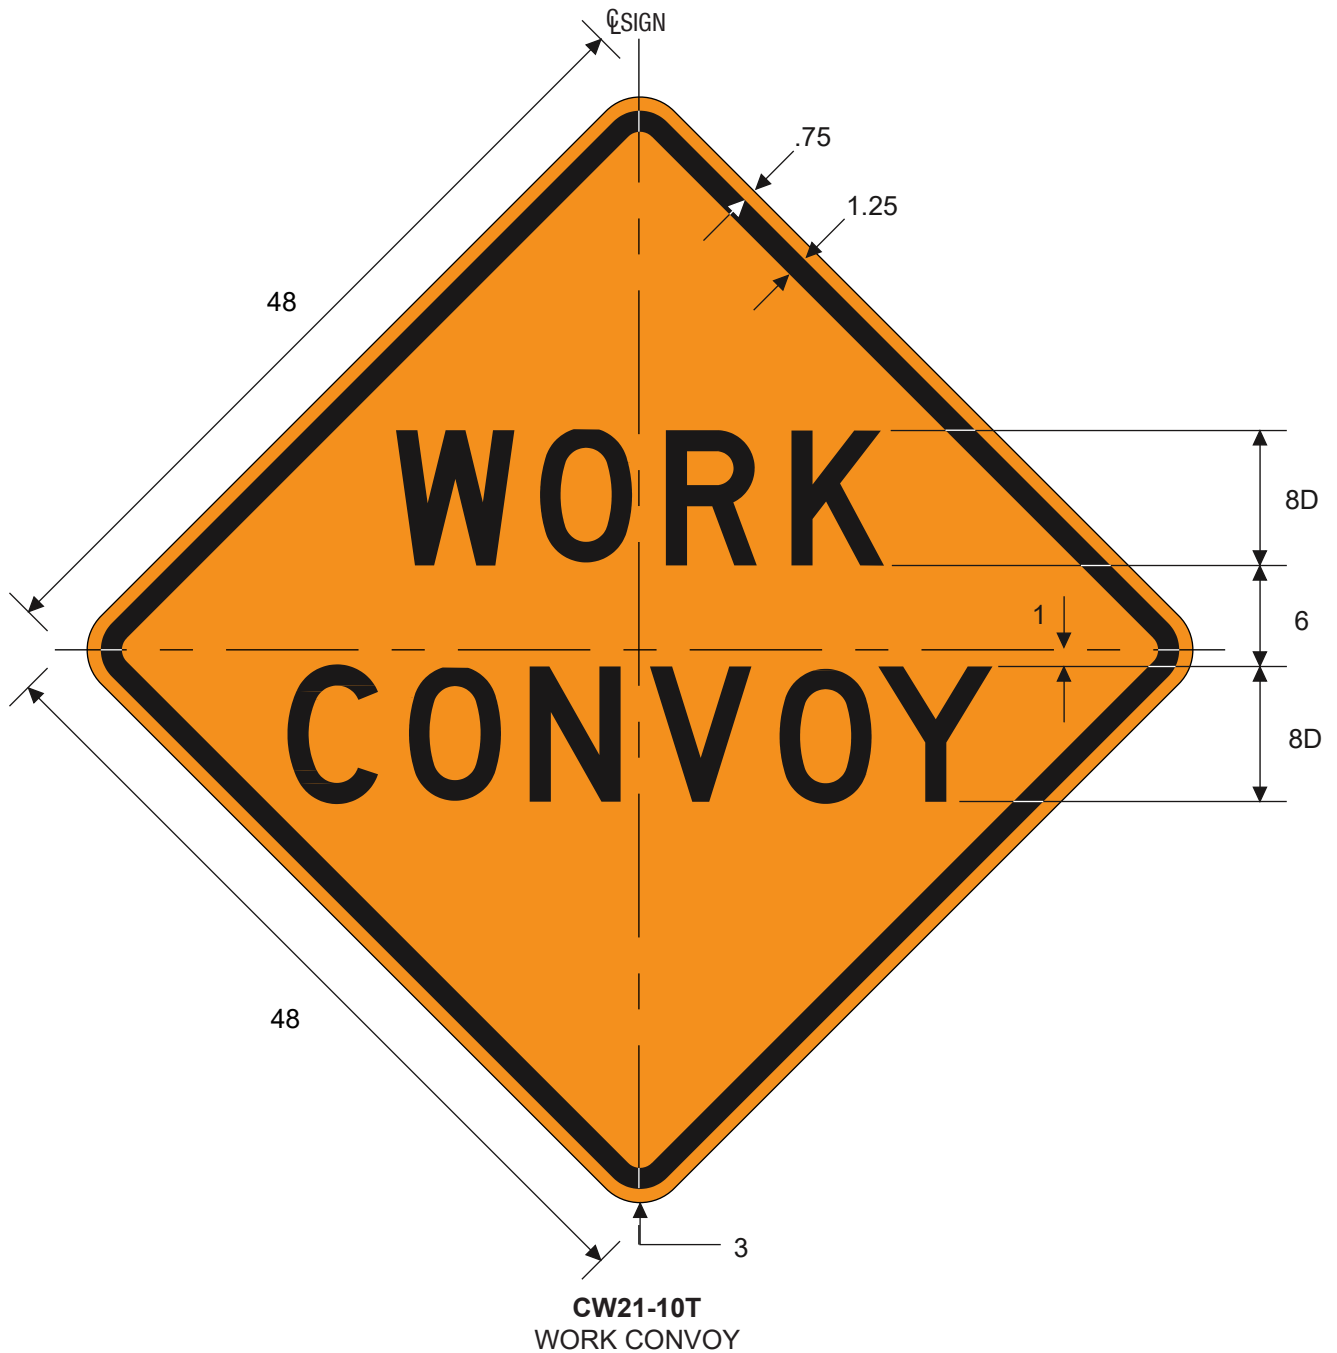


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



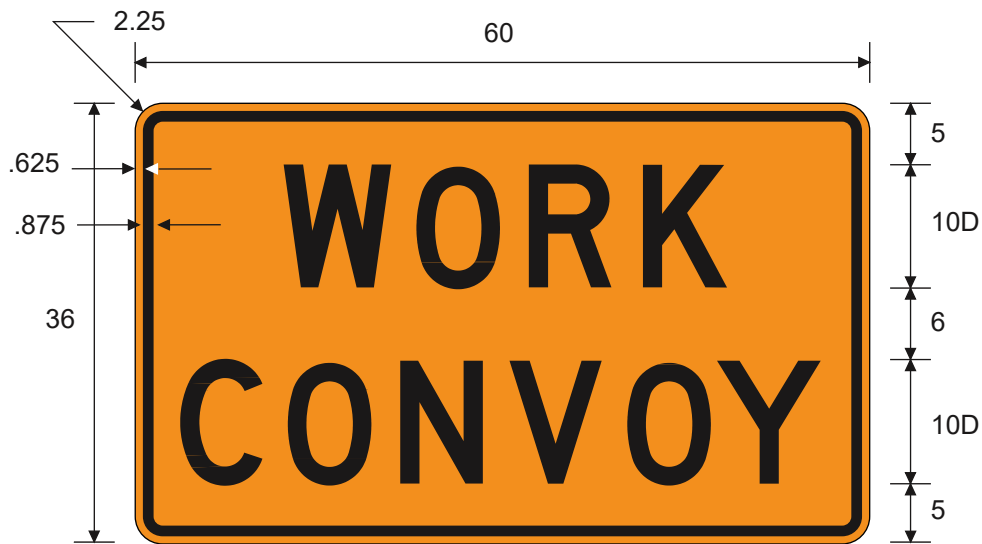



CW21-10aT
WORK CONVOY

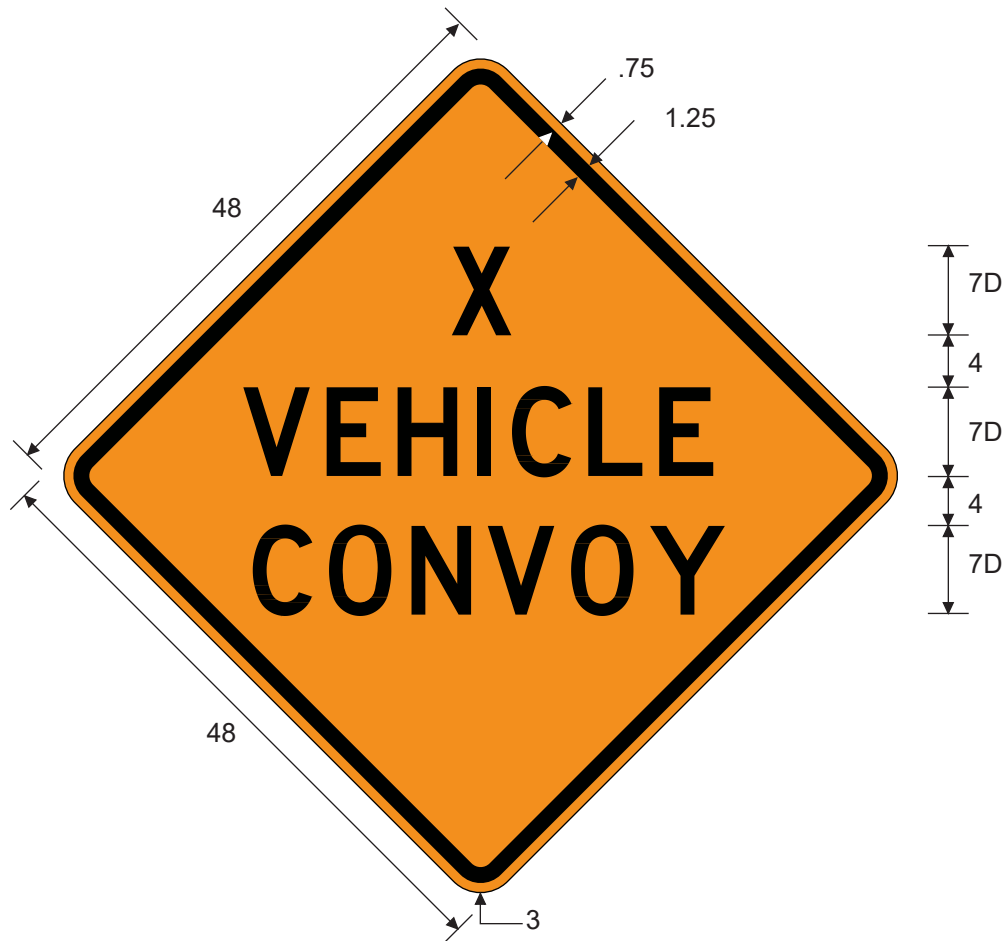

CW21-10bT
X VEHICLE CONVOY

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



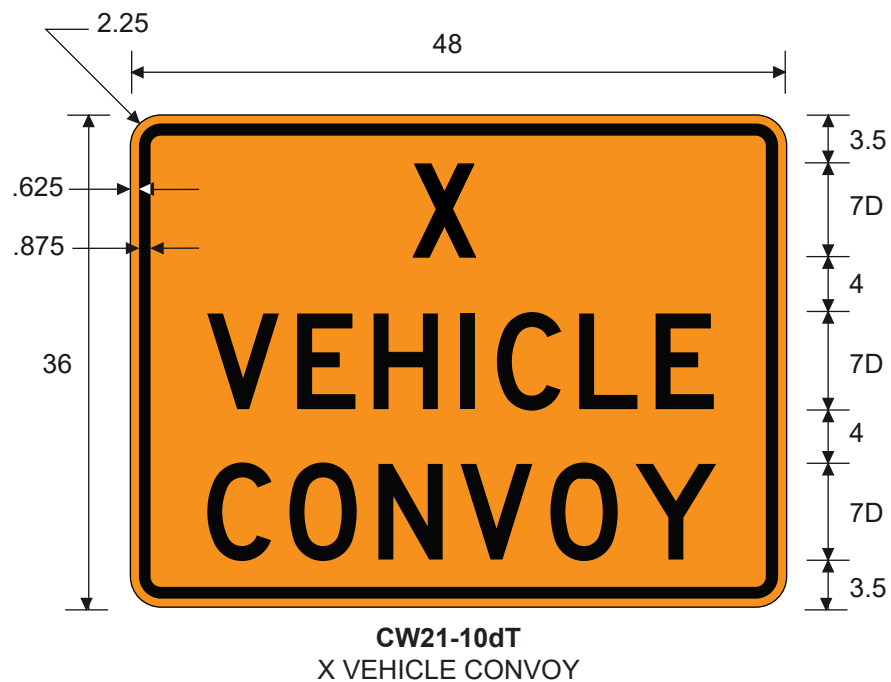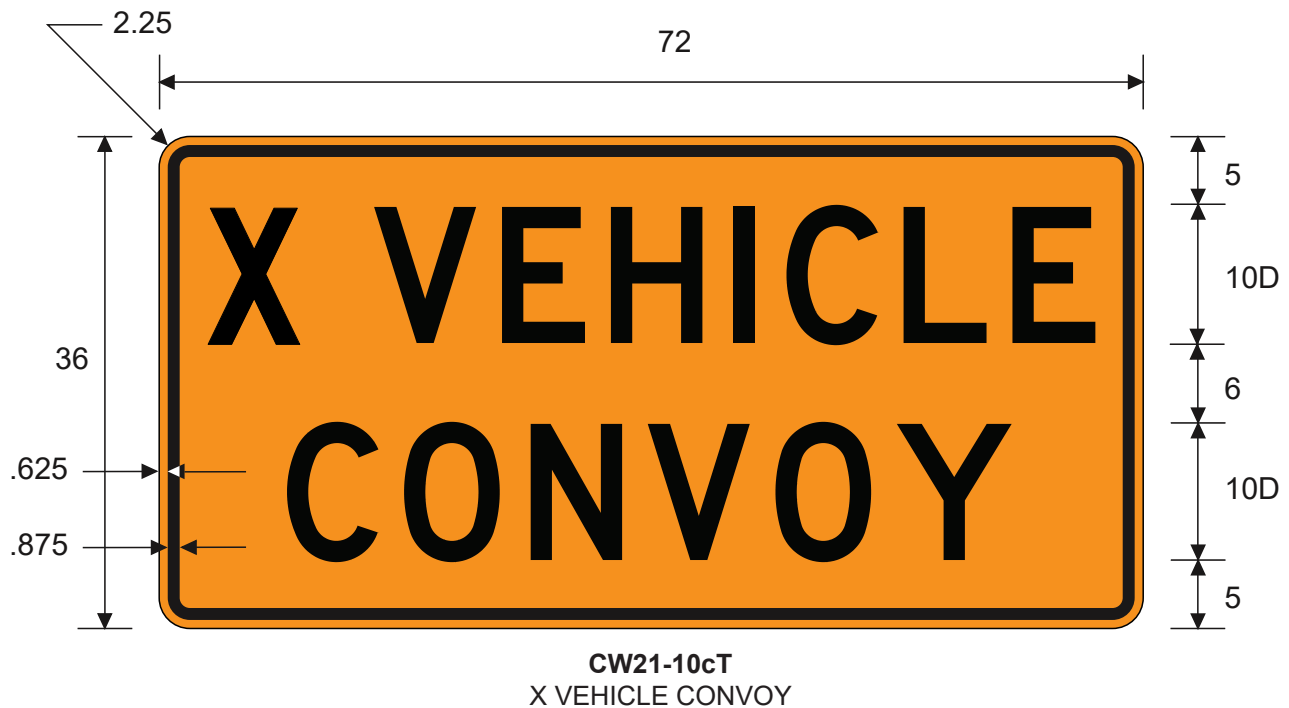

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE






CW21-17T
GUARDRAIL DAMAGE AHEAD

A	B	C	D	E	F
30	.5	.75	4C	2	1.875
36	.625	.875	5C	3	2.25
48	.75	1.25	6C	4	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



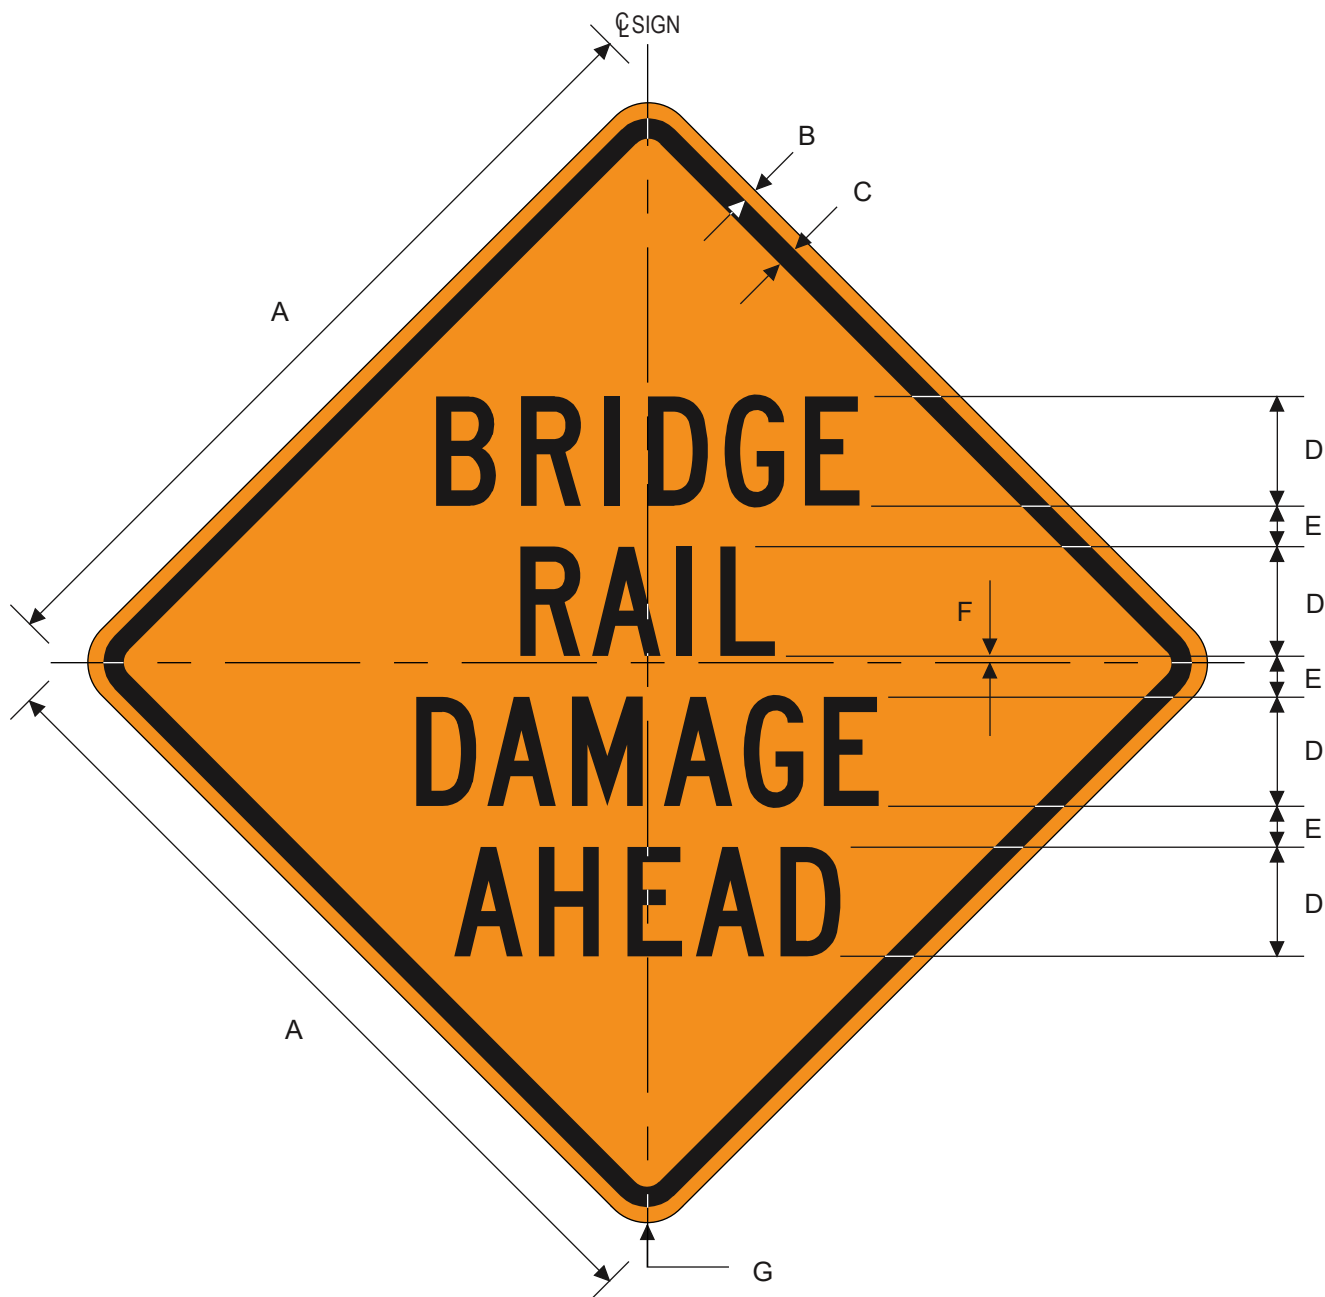


CW21-18T
BRIDGE RAIL DAMAGE AHEAD

A	B	C	D	E	F	G
30	0.5	0.75	4C	1.5	0.25	1.875
36	0.625	0.875	5C	1.75	0.25	2.25
48	0.75	1.25	6C	3.5	0.25	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



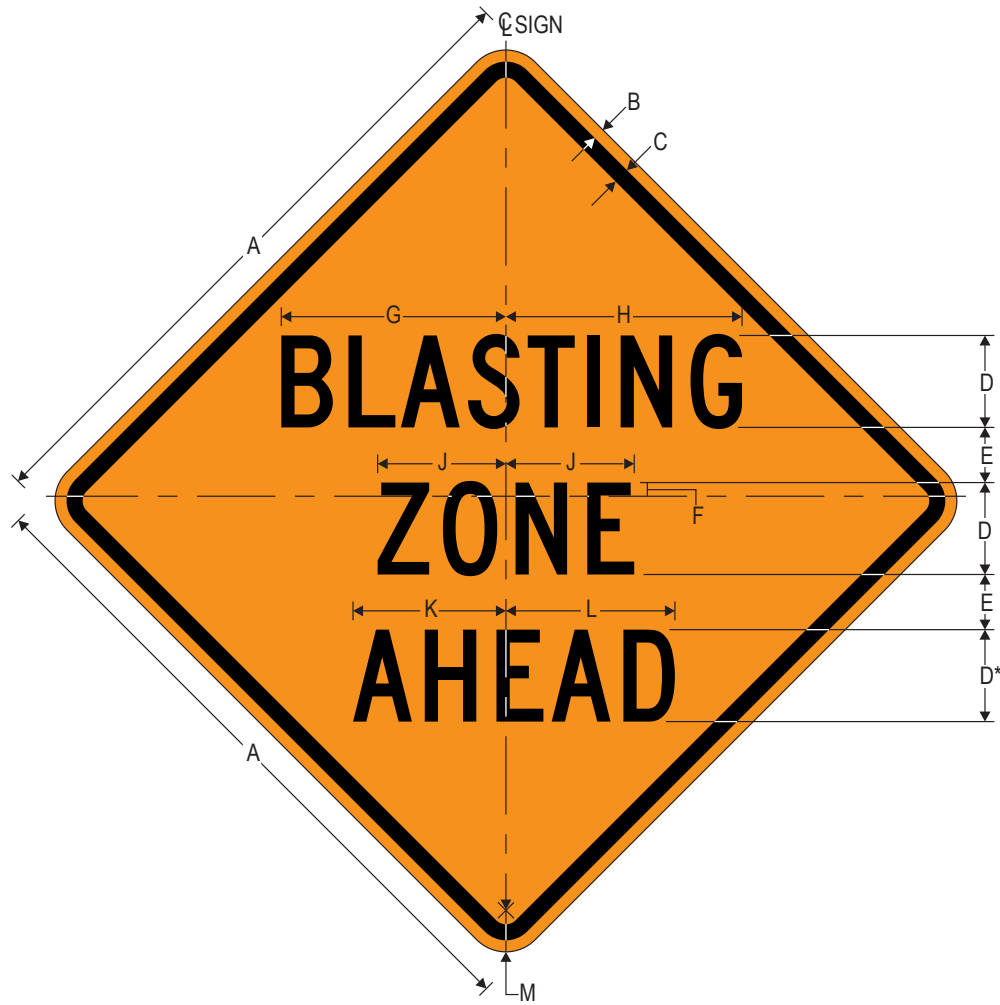

CW22-1[D]
BLASTING ZONE AHEAD

Distances should be in ½ mile or 500 ft increments:

***Alternate 3rd Line Legends**

500 FT	CW22-1[C] C Series	1/2 MILE	CW22-1[E] C Series
*1000 FT	CW22-1[B] C Series	1 MILE	CW22-1[F] D Series
*1500 FT	CW22-1[A] C Series		

*Reduce Spacing 40%.

A	B	C	D	E	F	G	H	J	K	L	M
30	0.5	0.75	4 C	2.5	0.75	9.774	10.273	5.582	6.753	7.252	1.875
36	0.625	0.875	5 C	3	1	12.217	12.842	6.978	8.316	9.19	2.25
48	0.75	1.25	7 C	4	1.25	17.104	17.978	9.769	11.817	12.692	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE






CW22-3
END BLASTING ZONE

A	B	C	D	E	F	G
36	30	0.5	0.75	3.25	6C	2.75
42	36	0.625	0.875	4.25	7C	3.25


H	J	K	L	M	N	P
6.063	6.062	15.036	15.035	8.373	8.373	1.875
7.073	7.072	17.541	17.541	9.769	9.768	2.25

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

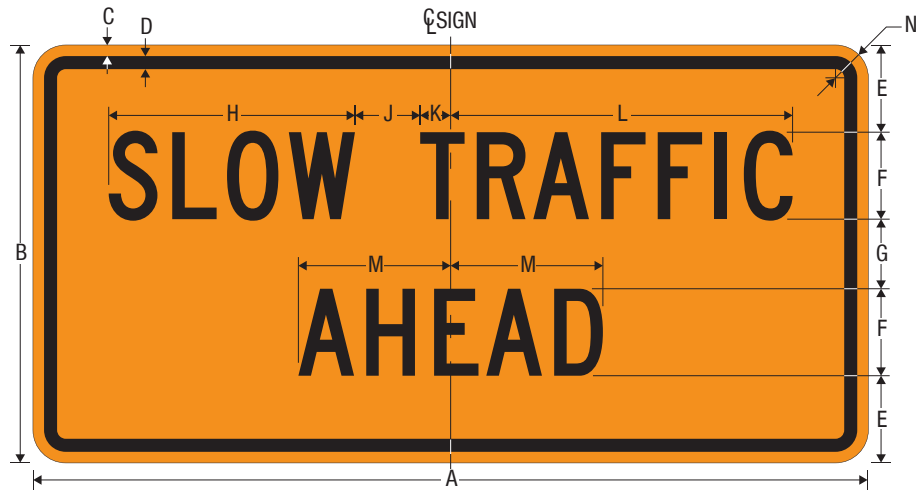

CW23-1
SLOW TRAFFIC AHEAD

A	B	C	D	E	F	G	H	J	K	L	M	N
48	24	0.625	0.75	5	5C	4	14.156	3.75	1.751	19.657	8.753	1.5

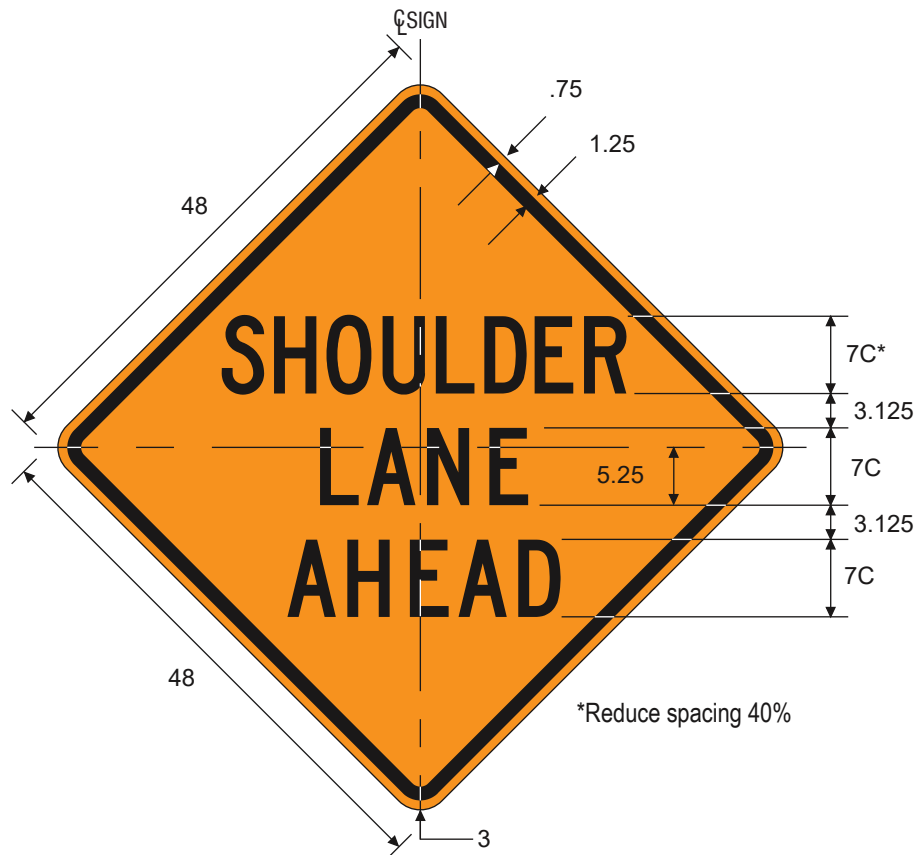

*Reduce spacing 40%

CW23-1T
SHOULDER LANE AHEAD

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE






CW23-2
NEW TRAFFIC PATTERN AHEAD


A	B	C	D	E	F	G	H	J	K	L	M	N	P
30	0.5	0.75	4C	2.5	4.282	4.282	8.563	8.563	9.144	9.143	6.753	7.252	1.875
36	0.625	0.875	5C	3	5.353	5.352	10.704	10.704	11.430	11.429	8.503	9.003	2.25
48	0.75	1.25	7C	4	7.494	7.493	14.986	14.985	16.002	16.001	11.755	12.754	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

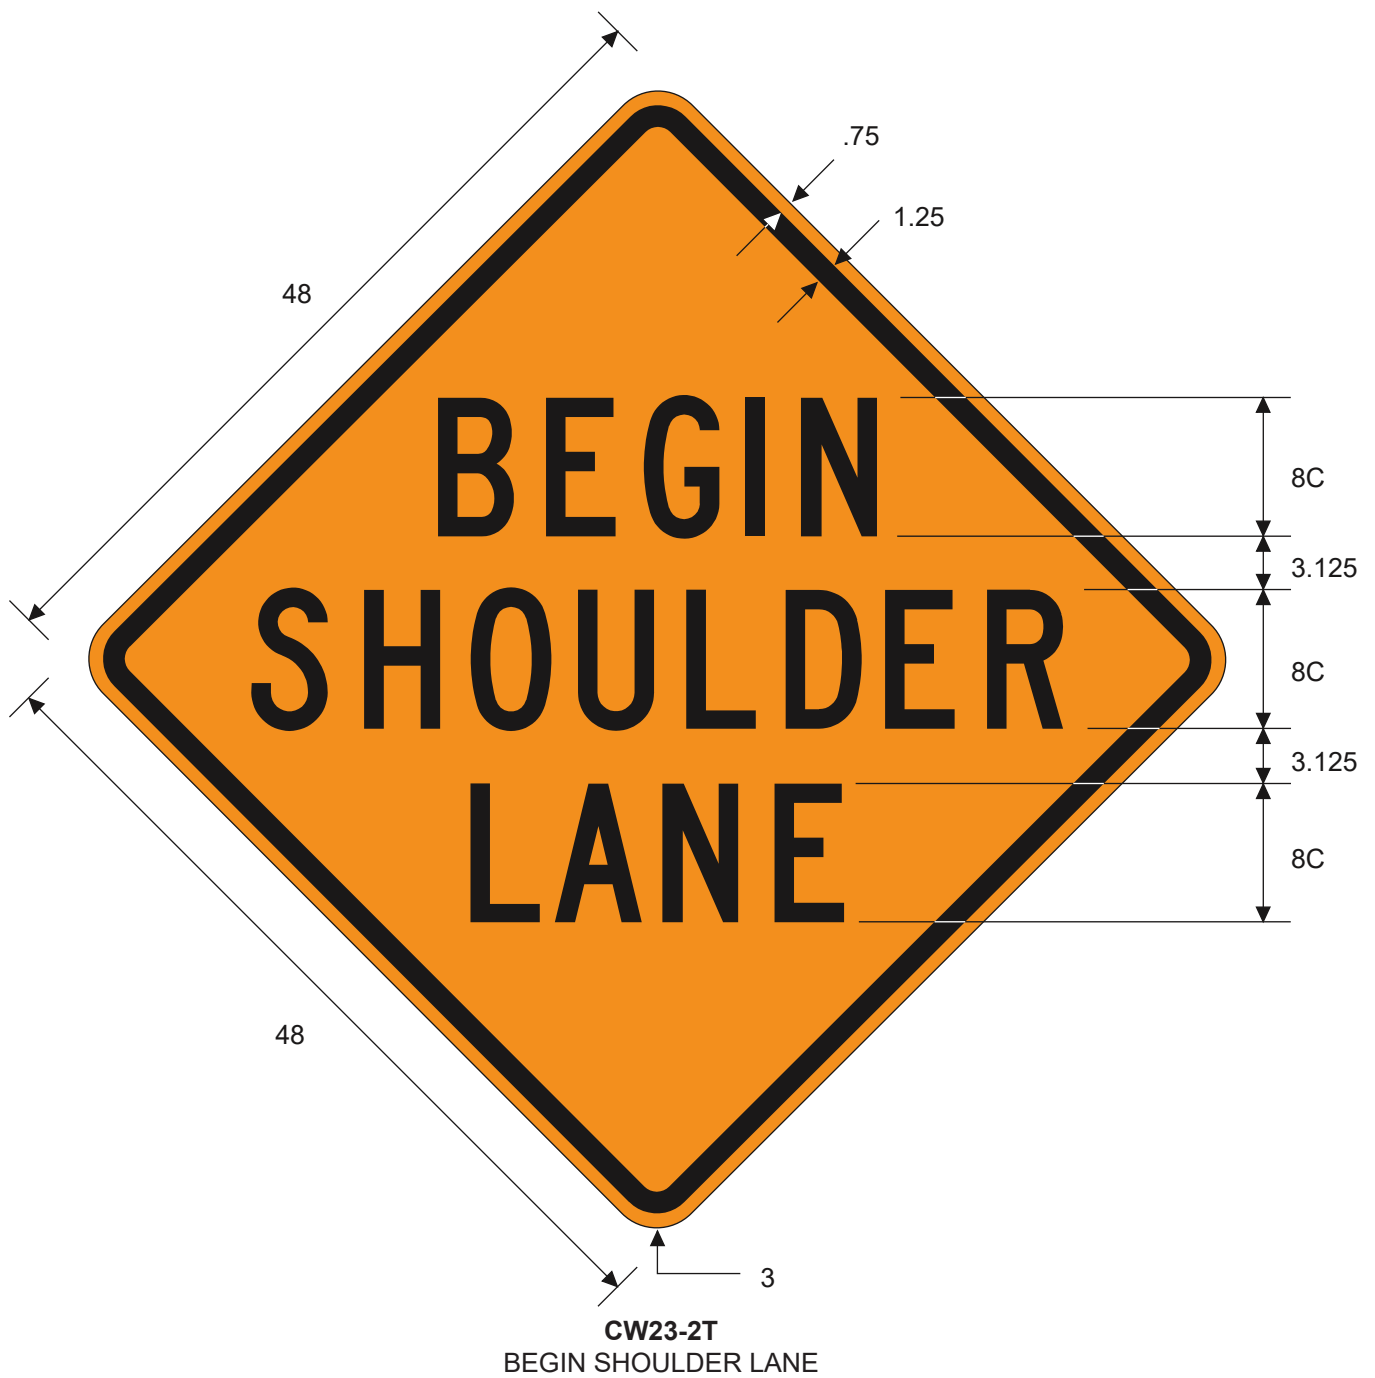

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE




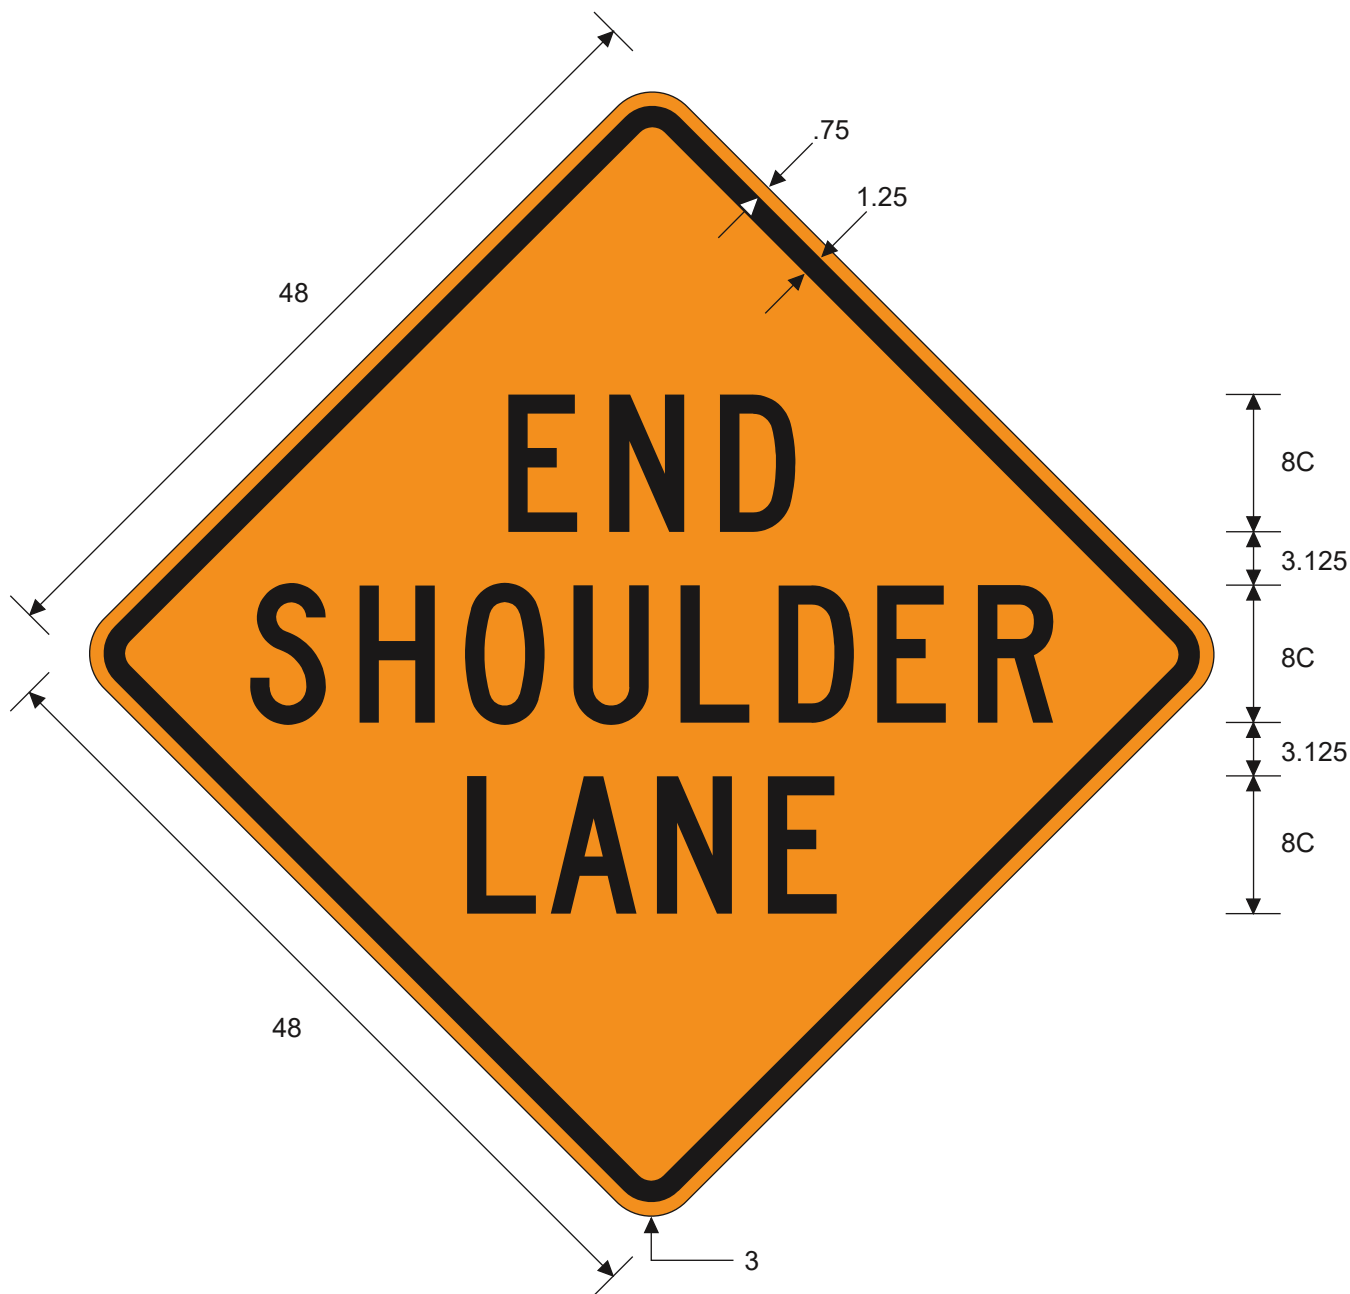

CW23-3T
END SHOULDER LANE

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE




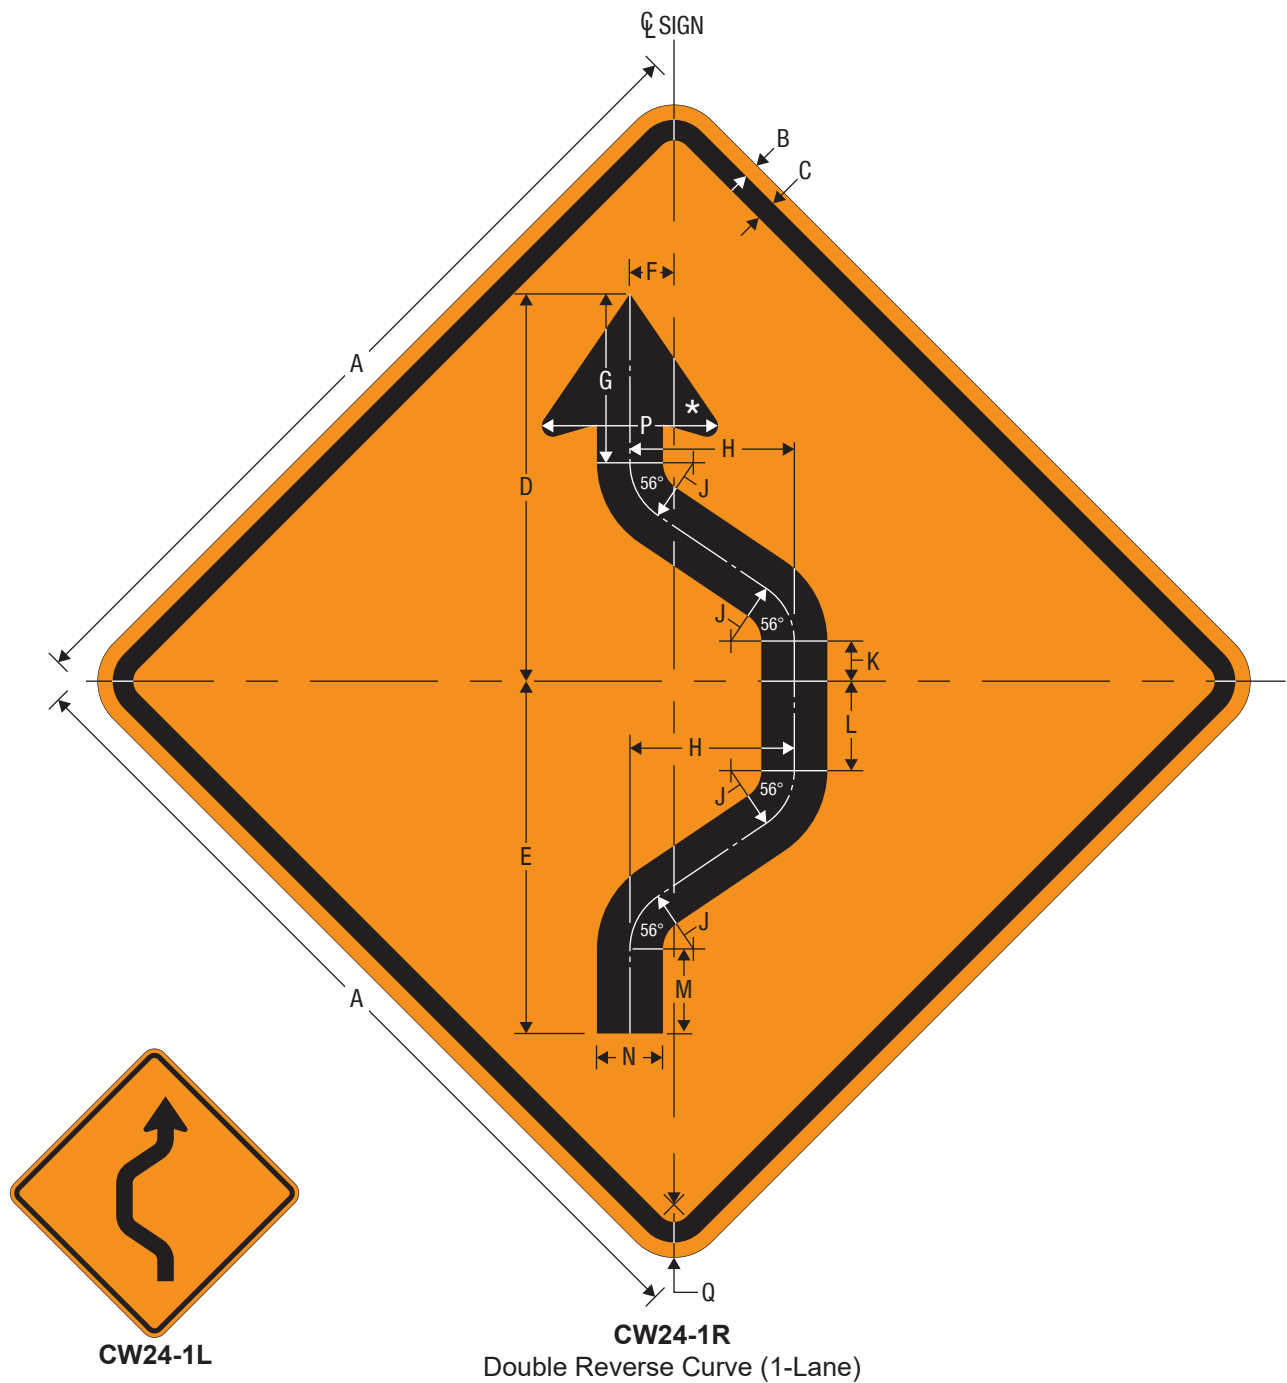

*See Section 11 for arrow design.

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q
30	0.5	0.75	13.75	12.5	1.563	6	5.833	2.25	1.423	3.173	3	2.344	6.25	1.875
36	0.625	0.875	16.5	15	1.875	7.200	7	2.700	1.708	3.808	3.6	2.813	7.5	2.25
48	0.75	1.25	22	20	2.5	9.600	9.333	3.600	2.277	5.077	4.8	3.75	10	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

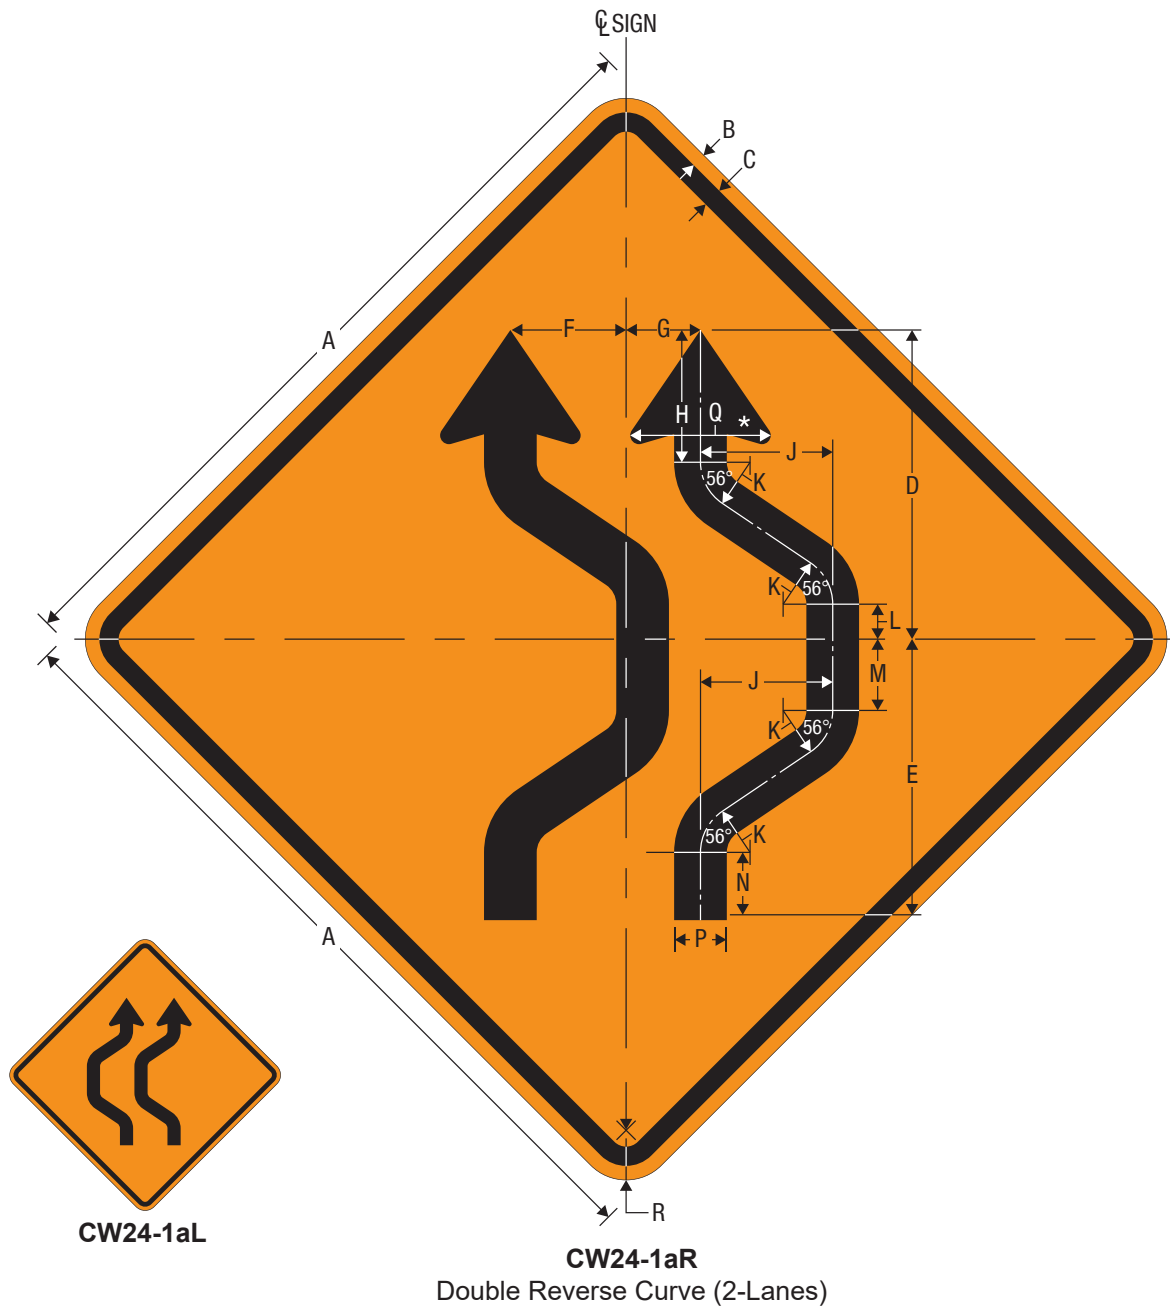


*See Section 11 for arrow design.

A	B	C	D	E	F	G	H
30	0.5	0.75	11.688	10.625	4.375	2.813	5
36	0.625	0.875	14.025	12.75	5.25	3.375	6
48	0.75	1.25	18.700	17	7	4.5	8

J	K	L	M	N	P	Q	R
5	1.875	1.321	2.696	2.563	1.992	5.313	1.875
6	2.25	1.585	3.235	3.075	2.391	6.375	2.25
8	3	2.114	4.314	4.100	3.188	8.5	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

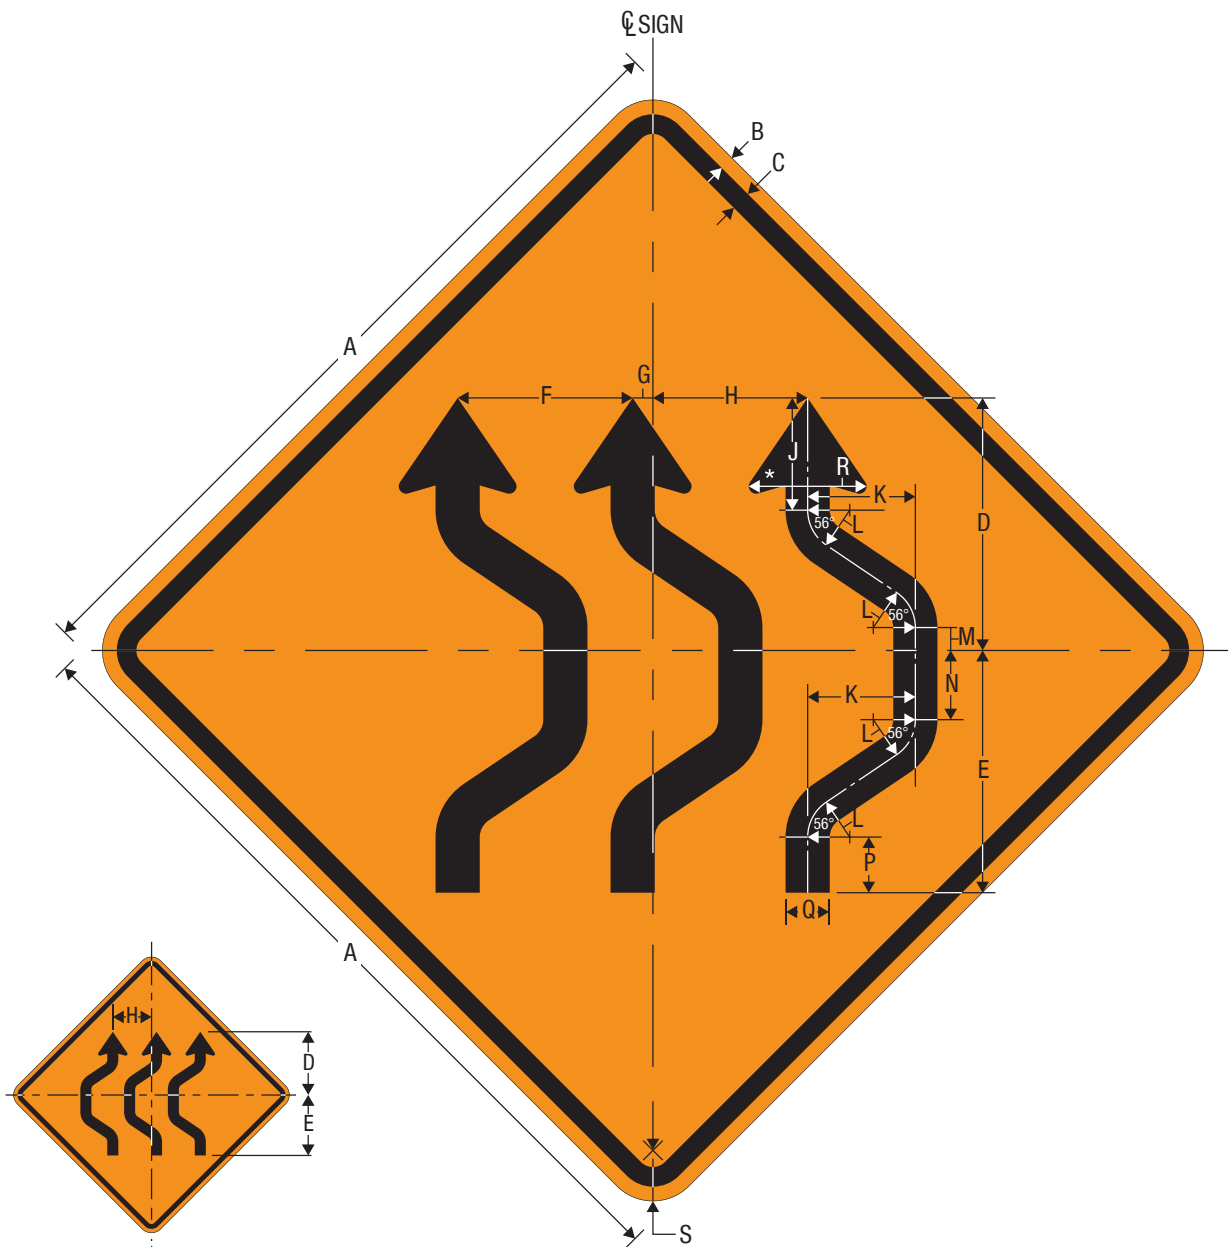

CW24-1bL

CW24-1bR


Double Reverse Curve (3-Lanes)

*See Section 11 for arrow design.

A	B	C	D	E	F	G	H	J
30	0.5	0.75	9.375	9	6.5	0.75	5.75	4.167
36	0.625	0.875	11.25	10.800	7.800	0.900	6.900	5
48	0.75	1.25	15	14.400	10.400	1.200	9.200	6.667

K	L	M	N	P	Q	R	S
4	1.563	0.849	2.574	2.067	1.641	4.375	1.875
4.800	1.875	1.018	3.088	2.480	1.969	5.25	2.25
6.400	2.5	1.358	4.118	3.307	2.625	7	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

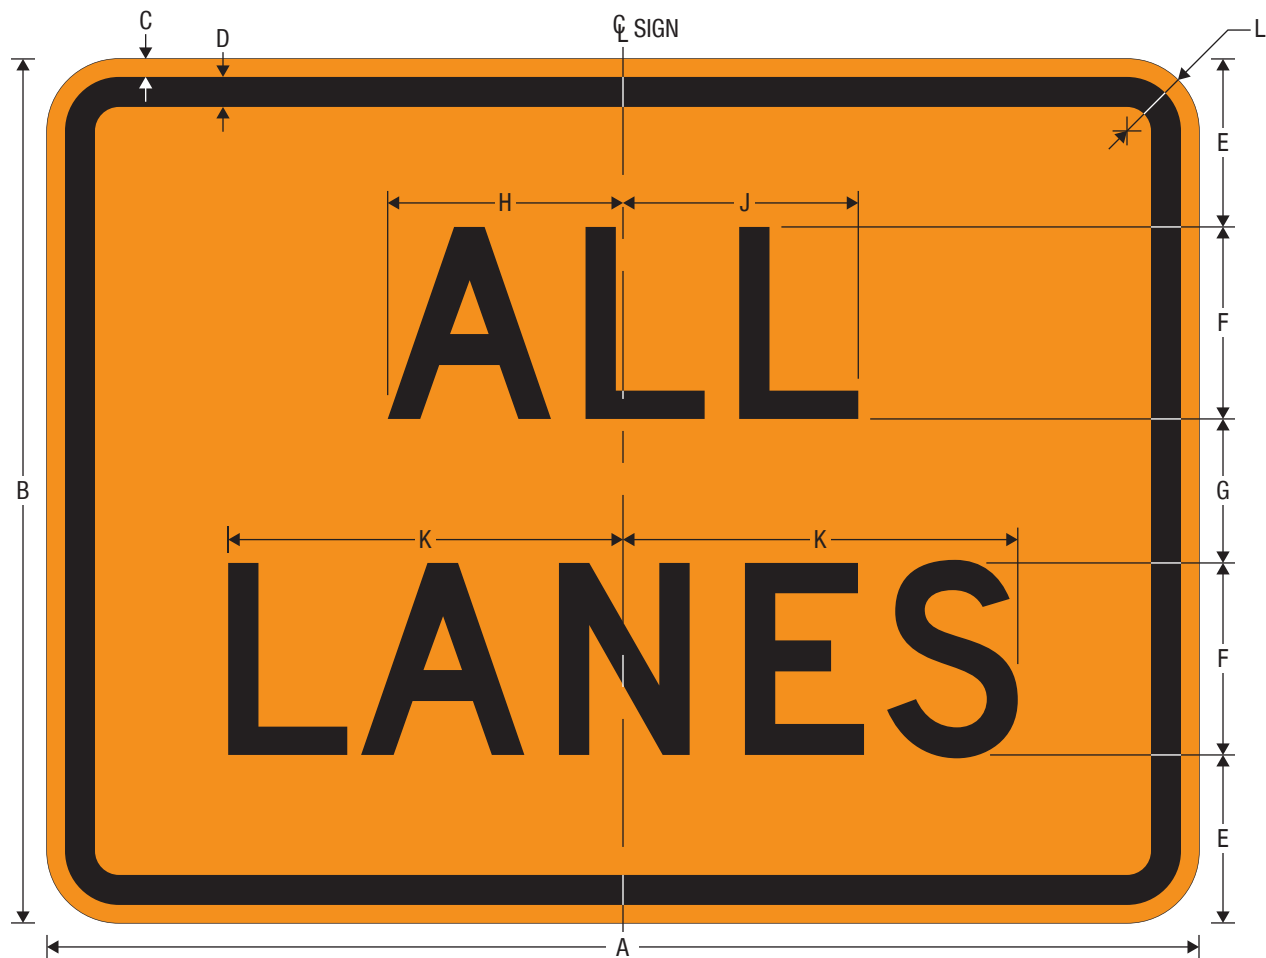


CW24-1cP
ALL LANES (Plaque)

*Increase Spacing 20%.

**Increase Spacing 50%.


A	B	C	D	E	F	G	H	J	K	L
24	18	0.375	0.625	3.5	4D*	3	4.902	4.902	8.225	1.5
30	24	0.375	0.625	4.125	6C**	3.75	6.243	6.242	10.774	1.5

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

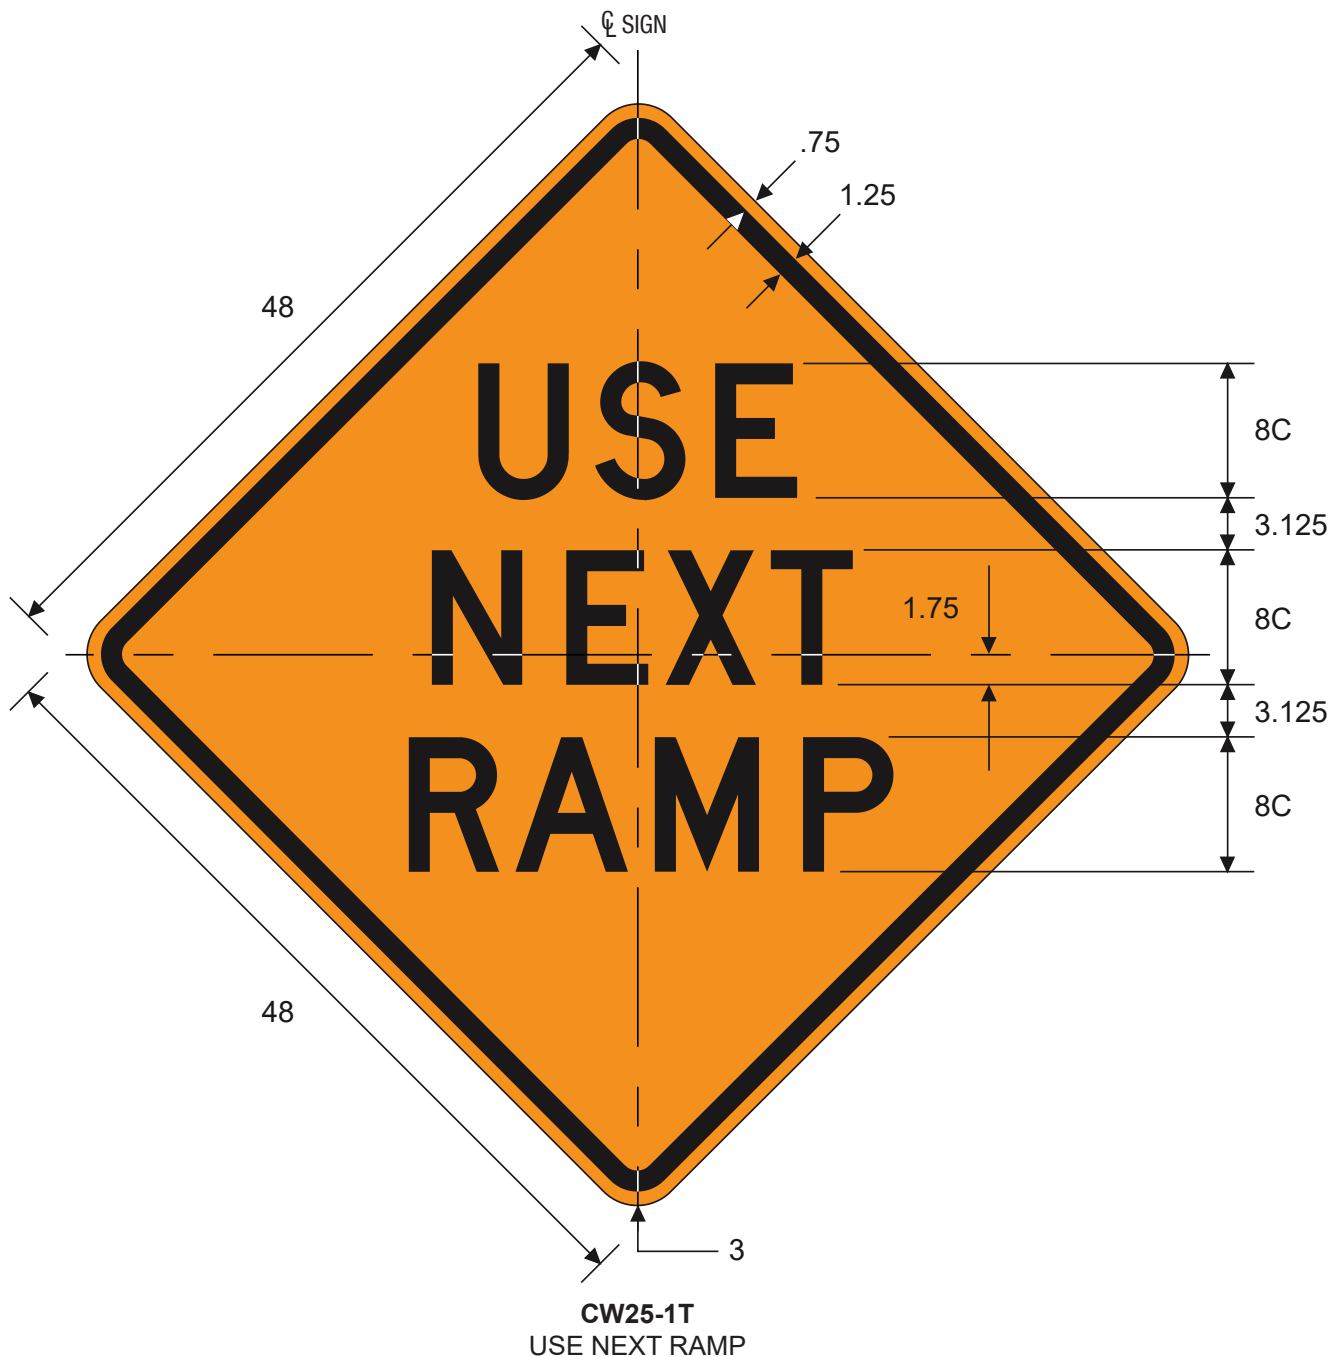


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



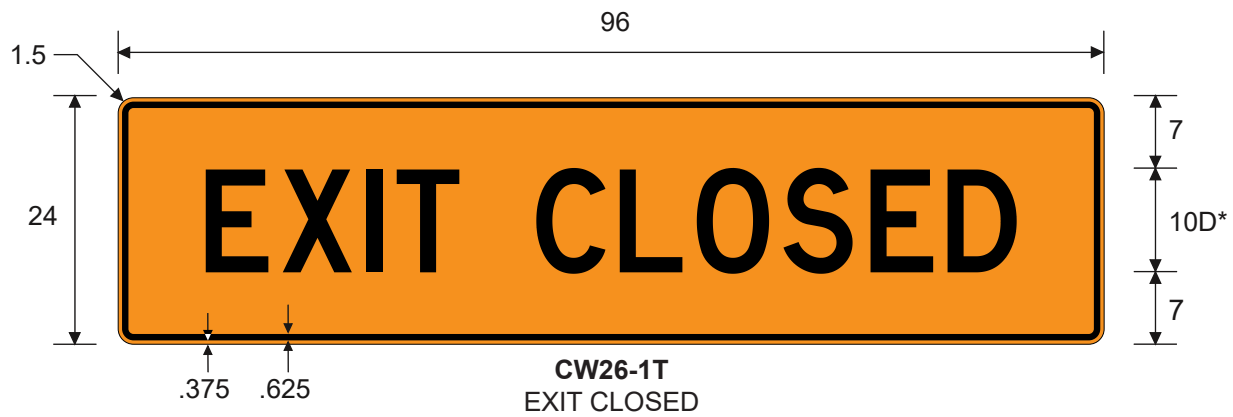


*Reduce Spacing 25%.

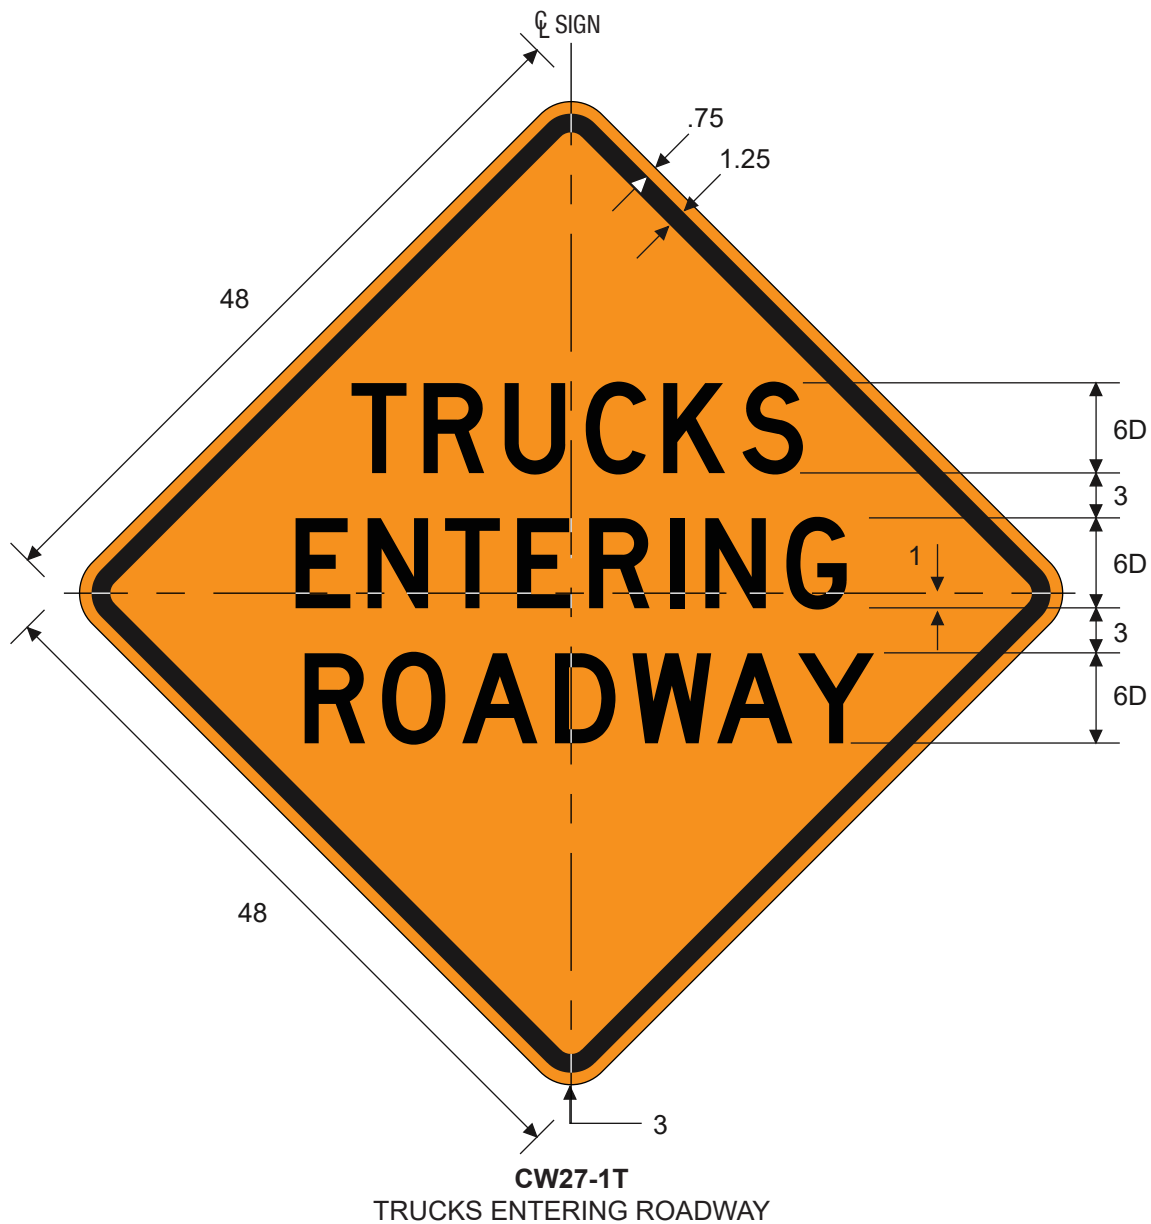

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



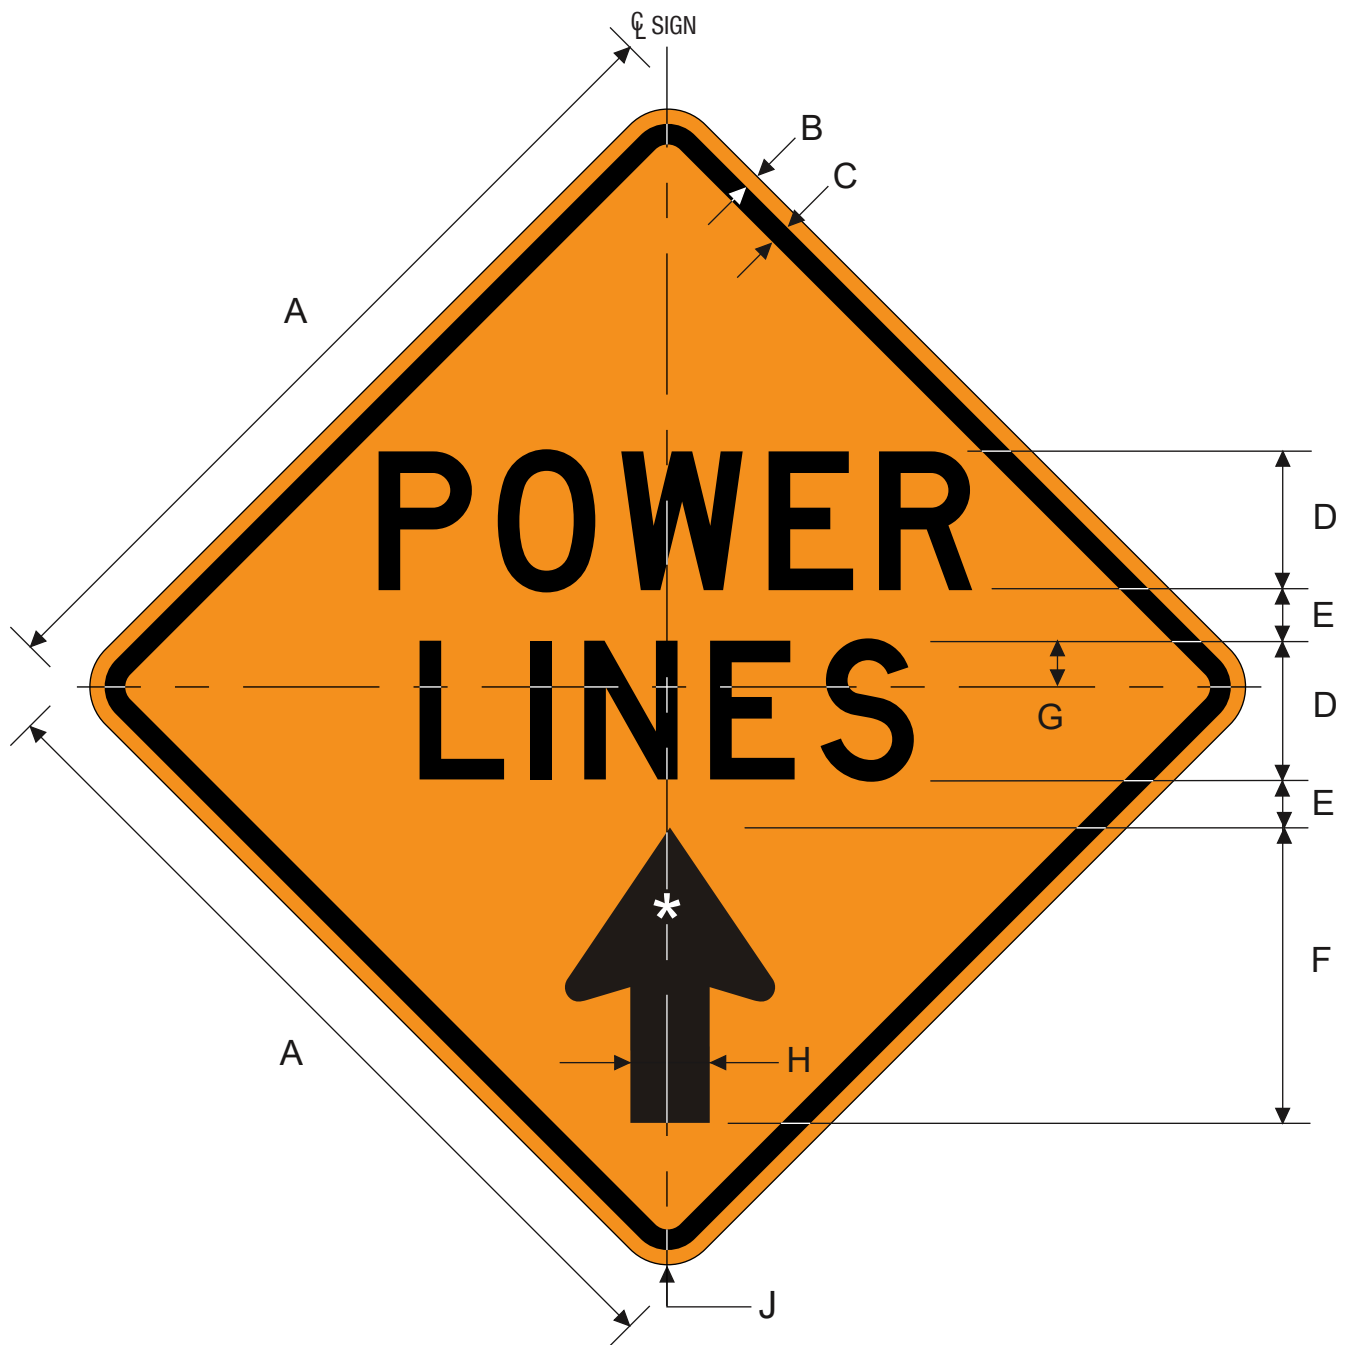



CW28-1T
POWER LINES (with Arrow)

*See Section 11 for arrow design.

A	B	C	D	E	F	G	H	J
36	.625	.875	6C	2	12.5	2	3.375	2.25
48	.75	1.25	8C	2.625	16.75	2.75	4.5	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE




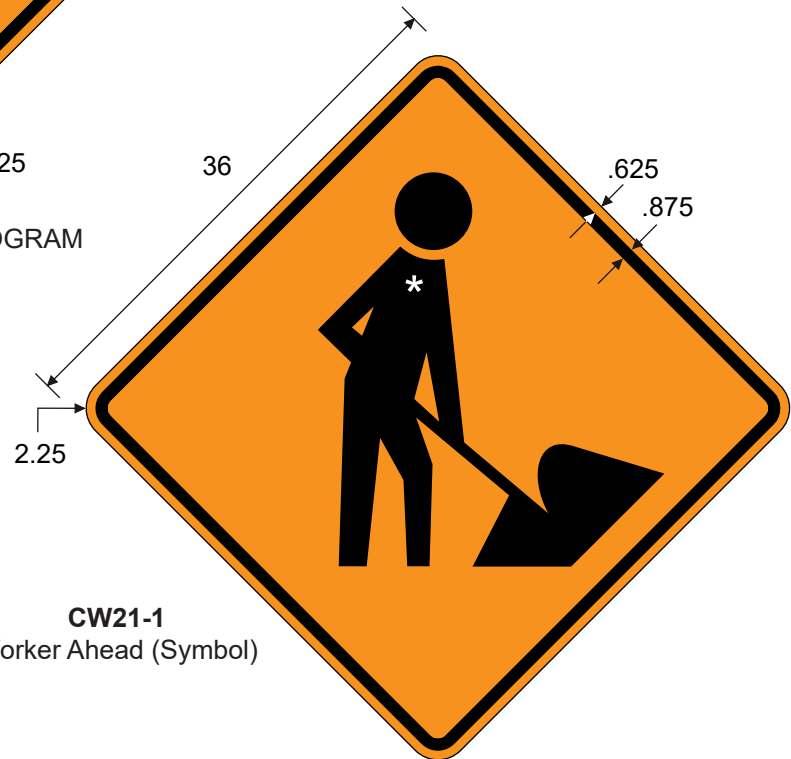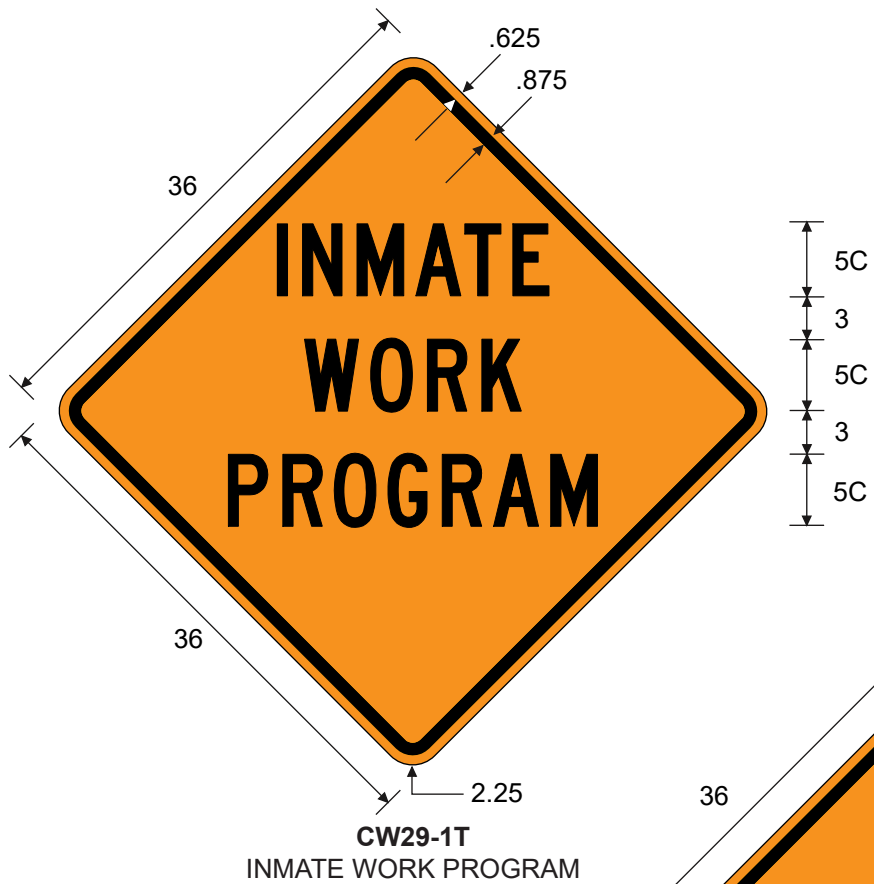

*See Section 11 for symbol design.


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



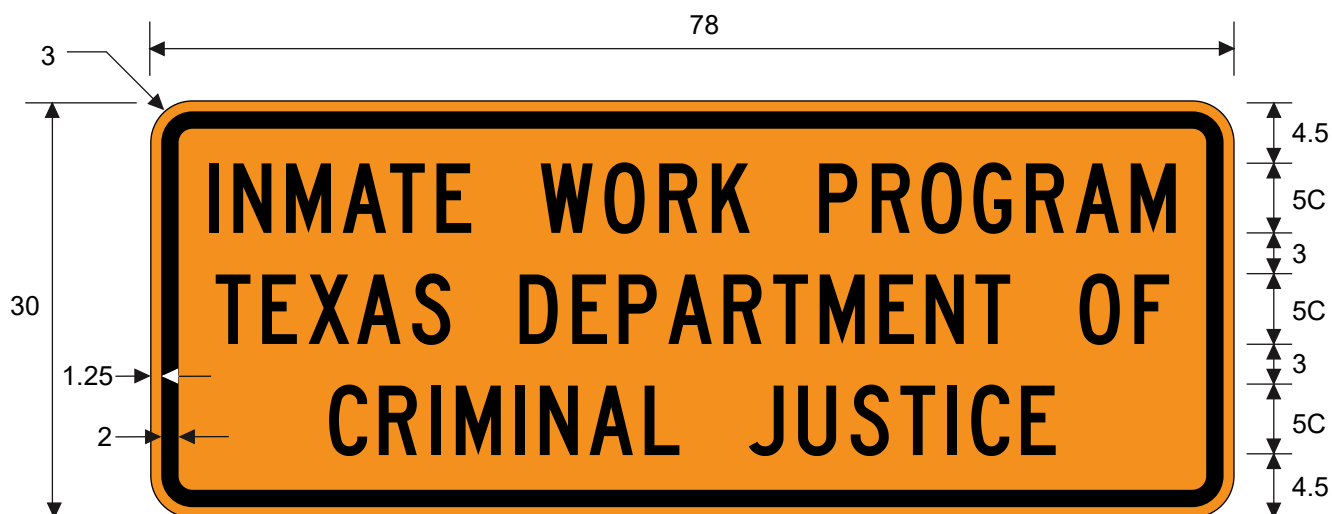

CW29-2T

INMATE WORK PROGRAM TEXAS DEPARTMENT OF CRIMINAL JUSTICE

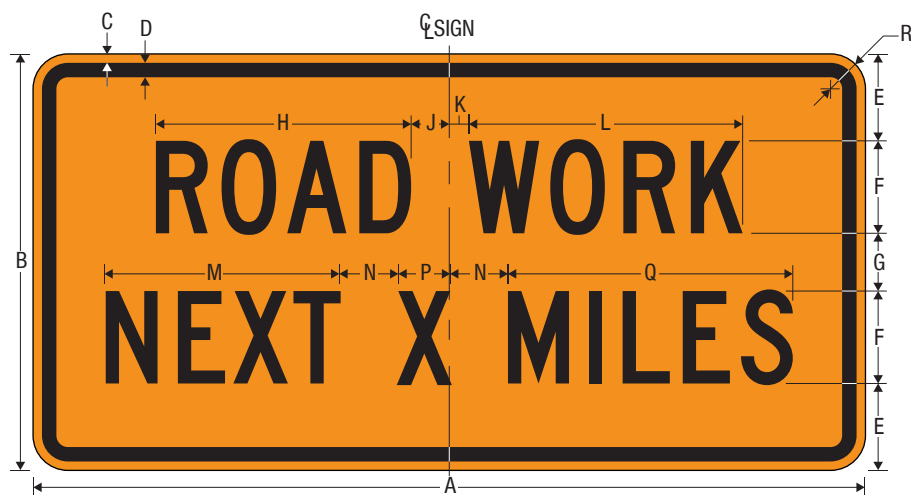

G20-1T

ROAD WORK NEXT X MILES

A	B	C	D	E	F	G	H
48	24	0.625	0.75	5	5C	4	13.805


J	K	L	M	N	P	Q	R
2.501	1.499	14.806	12.705	4	VAR	15.406	1.875

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





G20-1aT L | R
ROAD WORK NEXT X MILES (with Arrows)

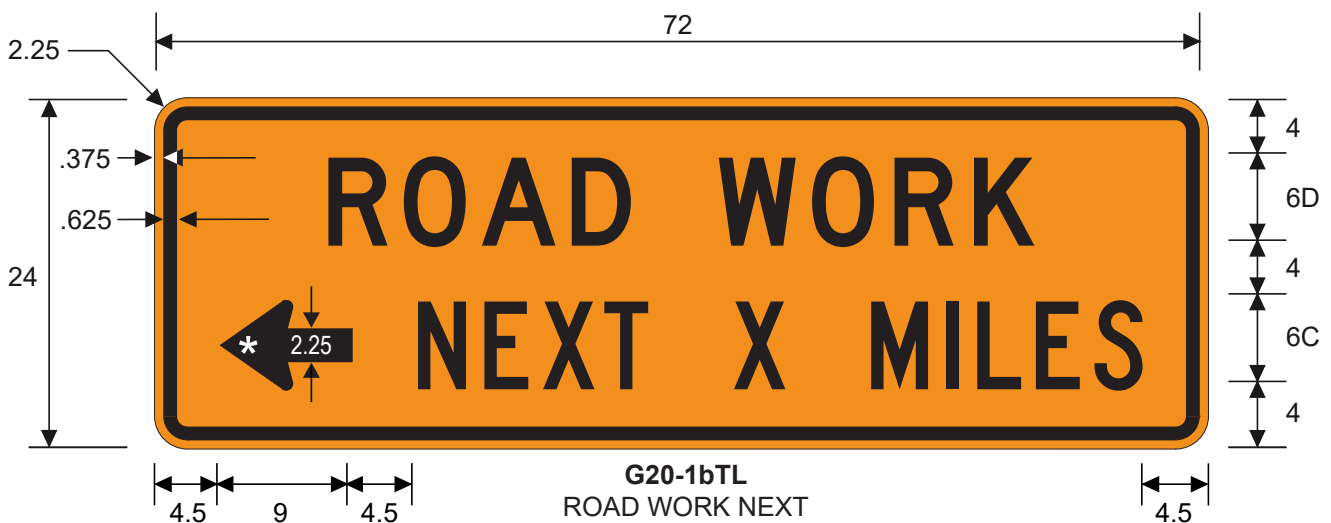

G20-1bTL
ROAD WORK NEXT
X MILES (with Arrow)



G20-1bTR

*See Section 11
for arrow design.


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





G20-2
END ROAD WORK

A	B	C	D	E	F	G	H	J	K	L	M
36	18	0.375	0.625	2.625	5C	2.75	9.86	13	3	13.88	1.5
48	24	0.625	0.75	4	6C	4	11.84	16.83	6	18.07	1.875

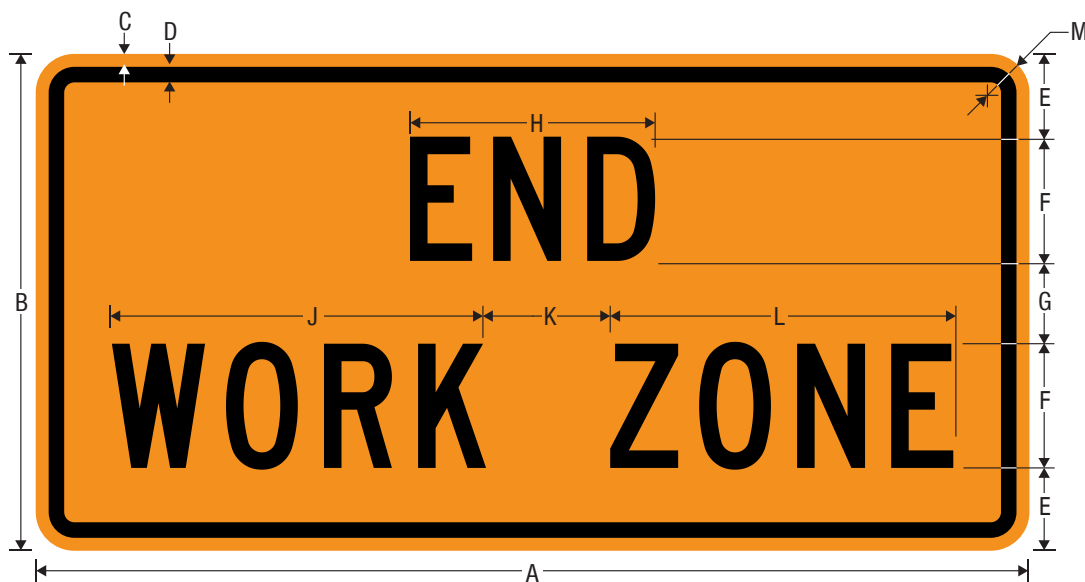

G20-2bT
END WORK ZONE

A	B	C	D	E	F	G	H	J	K	L	M
36	18	0.375	0.625	2.625	5C	2.75	9.86	13.88	5	12.62	1.5
48	24	0.625	0.75	4	6C	4	11.84	18.07	6	16.57	1.875


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





G20-4
PILOT CAR FOLLOW ME

A	B	C	D	E	F	G	H	J	K	L	M	N	P
36	18	0.374	0.625	3.75	4C	2.5	11.234	0.650	8.083	12.375	4.312	5.563	1.5

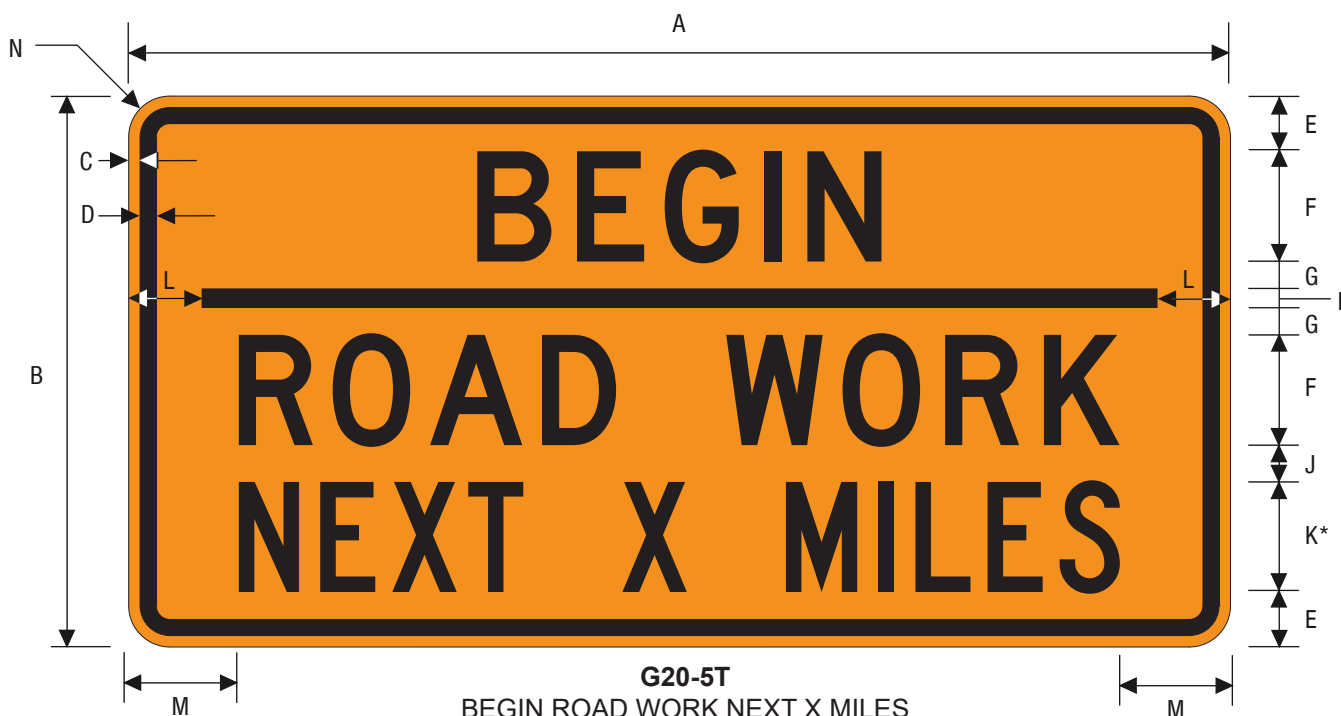


G20-5T
BEGIN ROAD WORK NEXT X MILES

*Reduce spacing 10%.

A	B	C	D	E	F	G	H	J	K	L	M	N
48	24	0.375	0.625	2.5	5D	0.875	0.75	1.5	5C	3	4	1.5
60	30	0.5	0.75	3	6D	1.5	1	2	6C	4	6	1.875

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



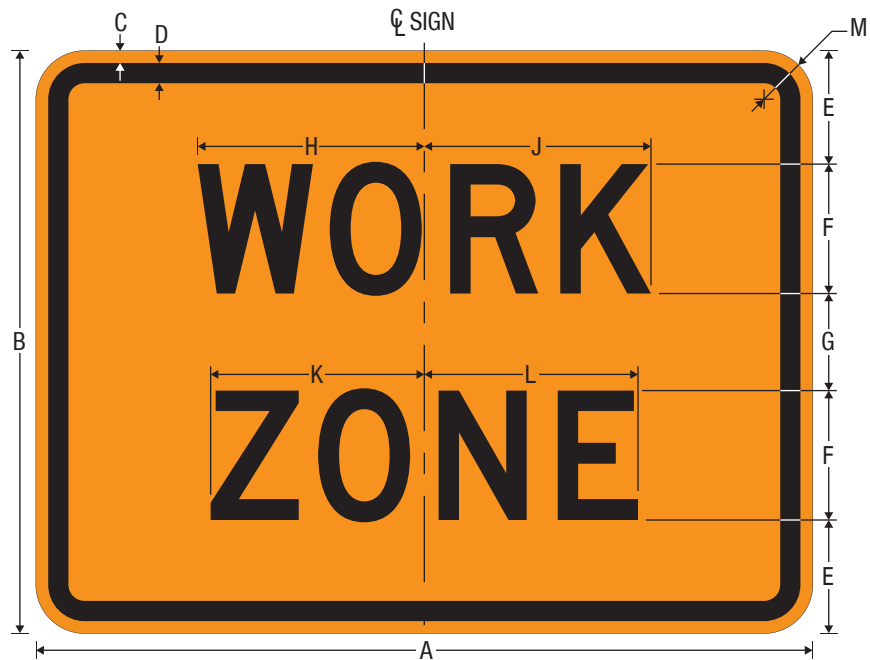

G20-5aP
WORK ZONE (Plaque)


A	B	C	D	E	F	G	H	J	K	L	M
24	18	0.375	0.625	2.5	5D	3	8.76	8.76	8.26	8.26	1.5
36	24	0.375	0.625	4.125	6D	3.75	10.507	10.507	9.907	9.907	1.5
48	36	0.625	0.875	7	8D	6	14.009	14.009	13.209	13.209	2.25



G20-5bPT
WORK ZONE (Plaque)


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



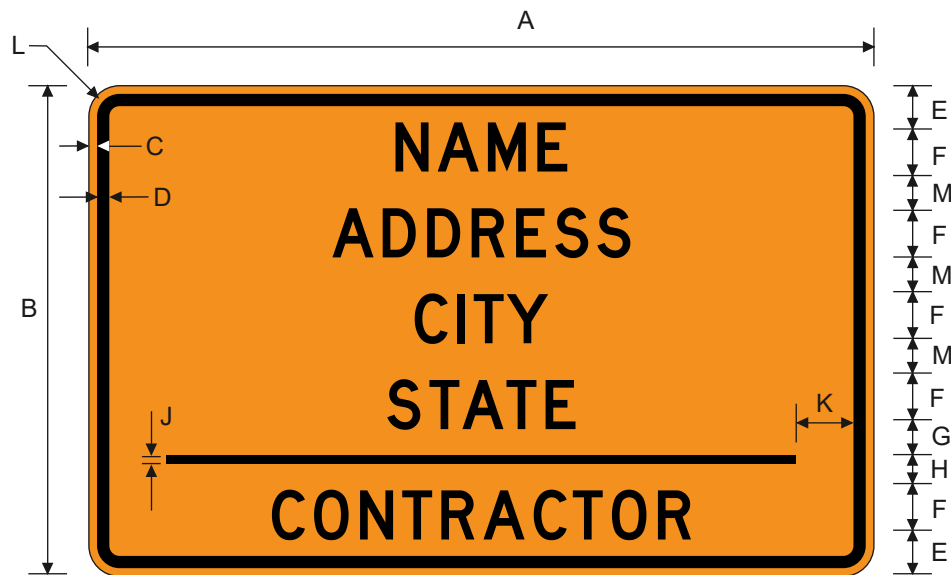

G20-6T
CONTRACTOR

A	B	C	D	E	F	G	H	J	K	L	M
48	30	0.5	0.75	2.25	3D	2.125	1.625	0.5	3.5	1.875	2.25
60	42	0.625	0.875	3.75	4D	3	2.5	0.625	3.5	2.25	3

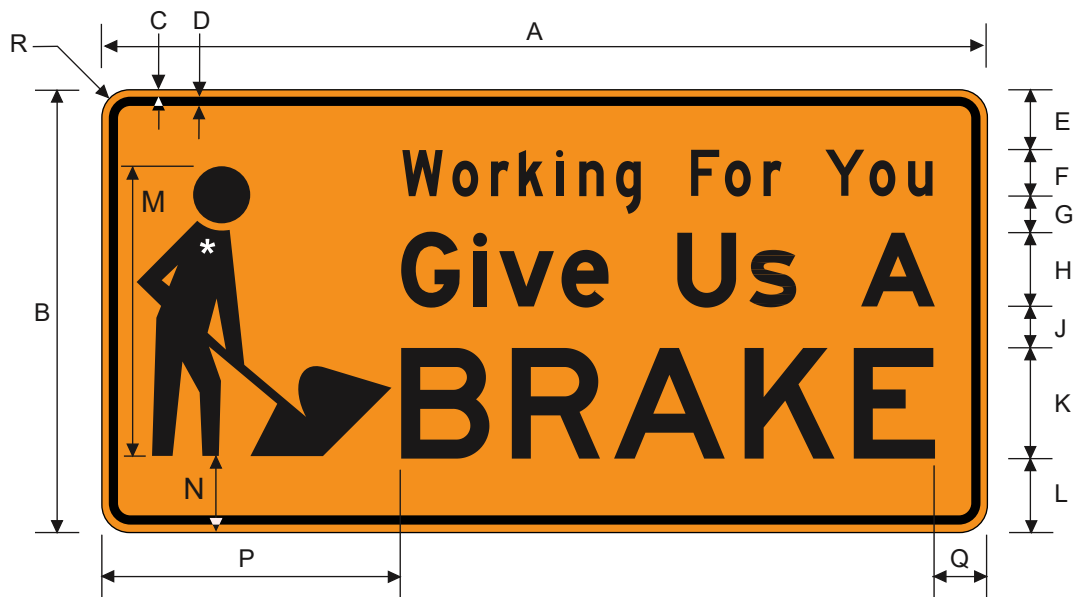

G20-7T
WORKING FOR YOU GIVE US A BRAKE (with Symbol)

*See Section 11 for symbol design.

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
96	48	0.75	1.25	6.5	5D	4	8E(m)	4.5	12E	8	31.425	7.25	32.5	5.625	3
192	96	1	1.5	13	10D	8	16E(m)	9	24E	16	62.85	14.5	65	11.25	6

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





G20-9PT
BEGIN WORK ZONE (Plaque)

A	B	C	D	E	F	G	H
24	24	0.375	0.625	2.5	5D	2	1.5
36	30	0.5	0.75	3	6D	3	1.875

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE





G20-10T
STAY ALERT TALK OR TEXT LATER (with Symbol)


*See Section 11
for symbol design.

COLORS:

TOP PANEL: LEGEND, BORDER - BLACK
BACKGROUND - YELLOW

BOTTOM PANEL: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE
SYMBOL - BLACK, WHITE
CIRCLE, DIAGONAL - BLACK




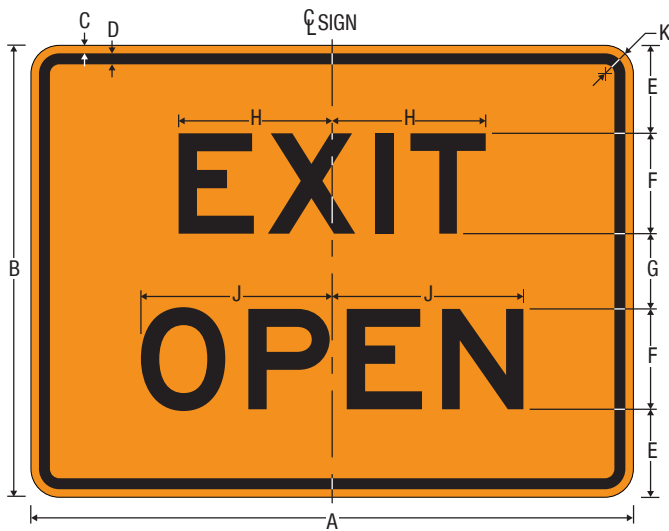

E5-2
EXIT OPEN

A	B	C	D	E
48	36	0.625	0.875	7


F	G	H	J	K
8E	6	12.242	15.246	2.25

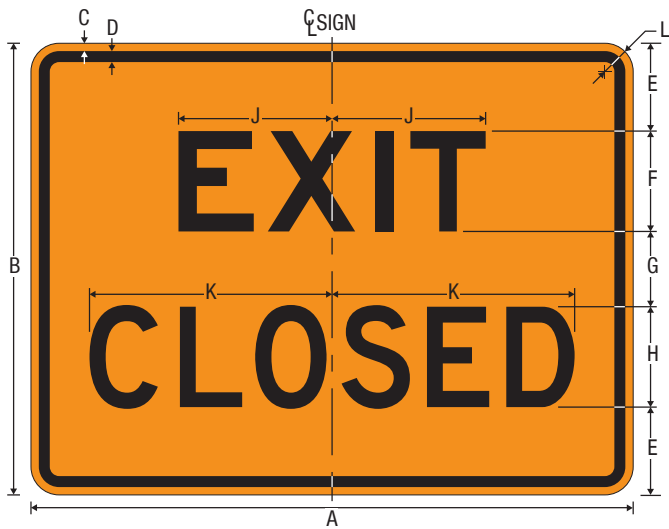

E5-2a
EXIT CLOSED

A	B	C	D	E	F
48	36	0.625	0.875	7	8 E

G	H	J	K	L
6	8 D	12.242	19.333	2.25

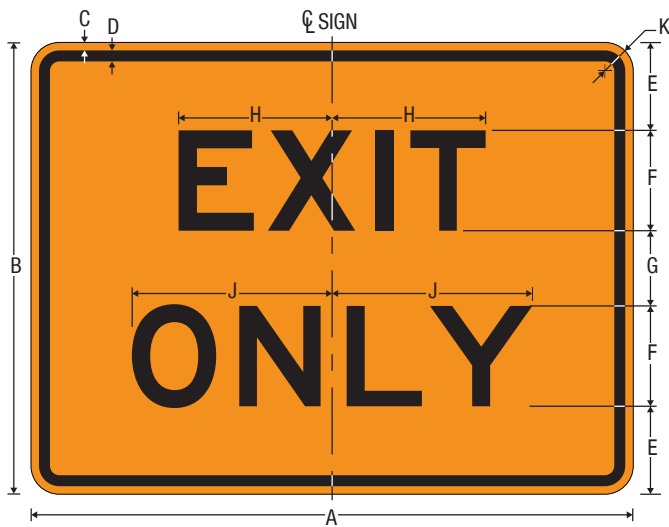


E5-3
EXIT ONLY


A	B	C	D	E
48	36	0.625	0.875	7

F	G	H	J	K
8 E	6	12.242	15.967	2.25

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

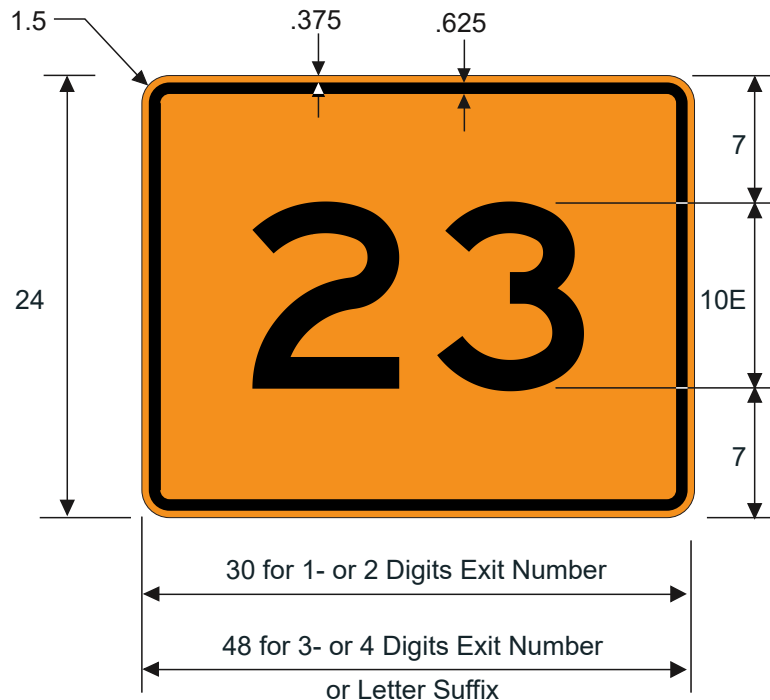

E5-4aPT
Exit Number (Plaque)

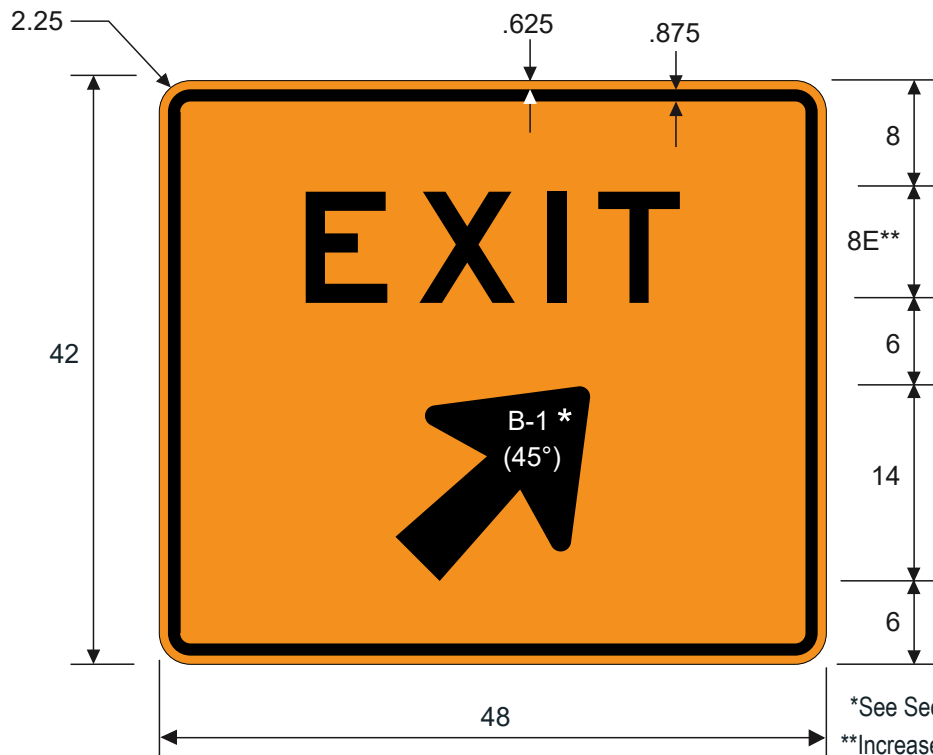


E5-4aT
EXIT GORE (with 45 Degree Arrow)

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

*See Section 11 for arrow design.
**Increase spacing 40%.



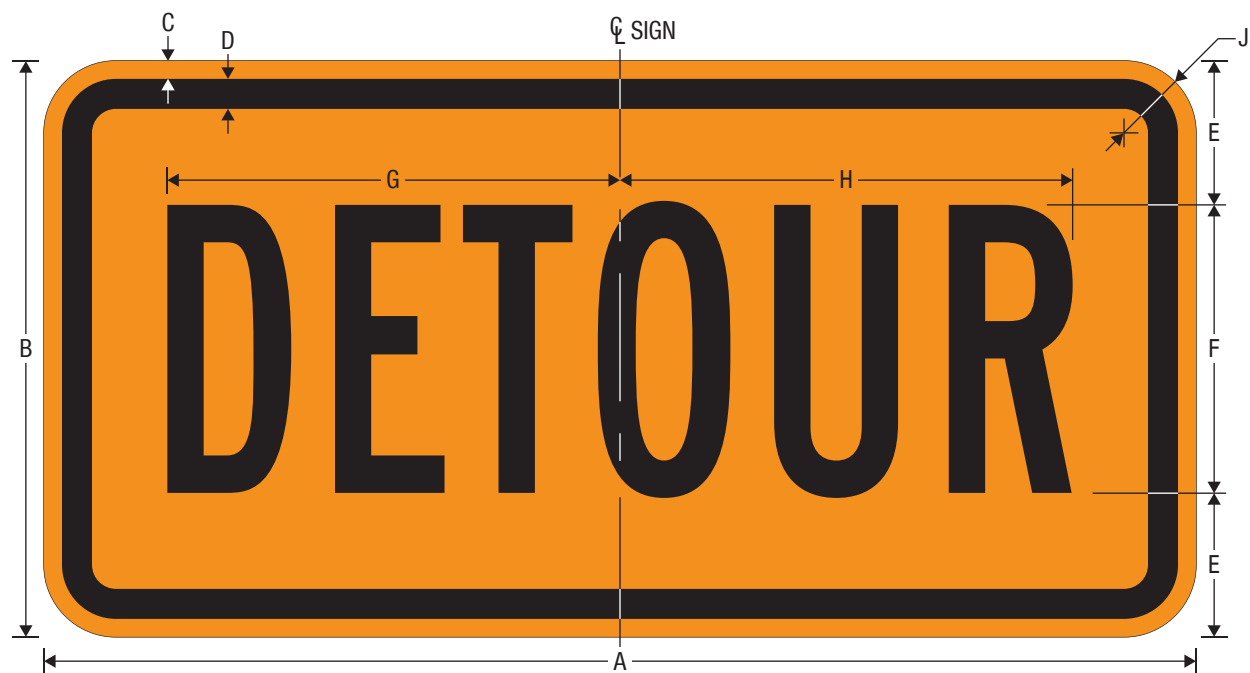


M4-8P
DETOUR (Plaque)

*Reduce spacing 20%.



A	B	C	D	E	F	G	H	J
12	6	0.375	0.375	1.5	3B*	4.716	4.715	1
24	12	0.375	0.438	3	6B*	9.431	9.430	1.5
30	15	0.375	0.438	3.5	8B*	12.574	12.574	1.5


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

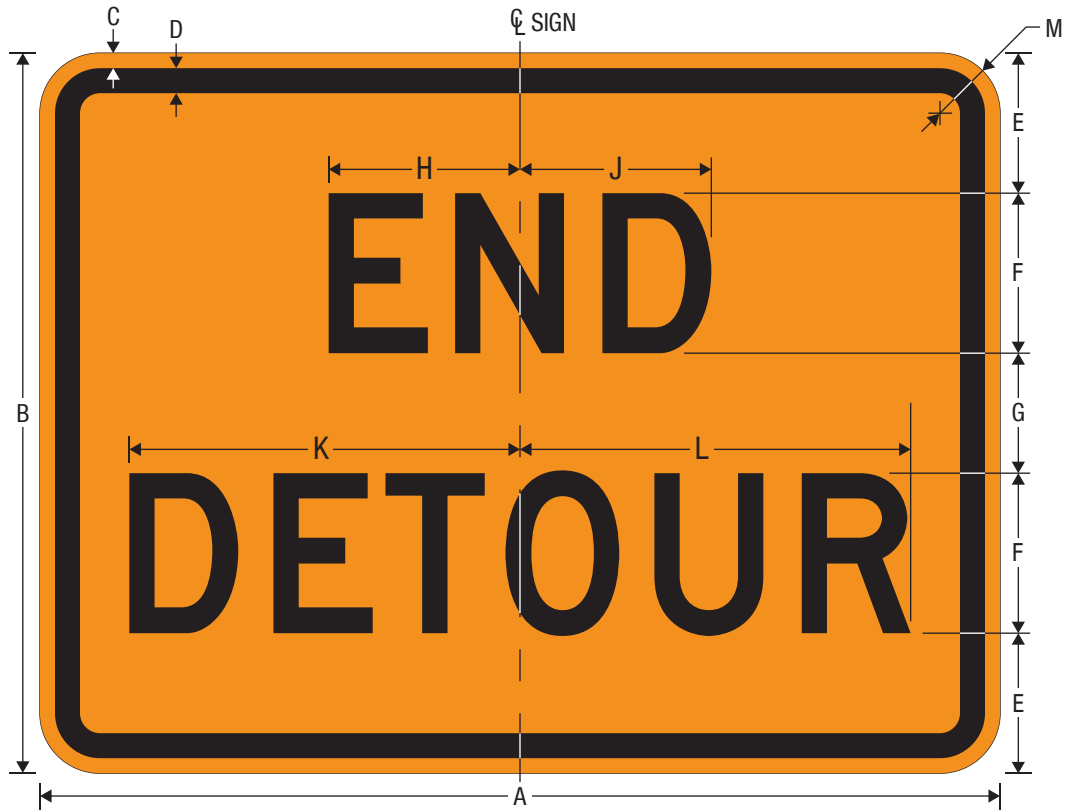

M4-8a
END DETOUR

A	B	C	D	E	F	G	H	J	K	L	M
24	18	0.375	0.625	3.5	4D	3	4.784	4.783	9.767	9.766	1.5

COLORS: LEGEND, BORDER — BLACK
BACKGROUND — ORANGE

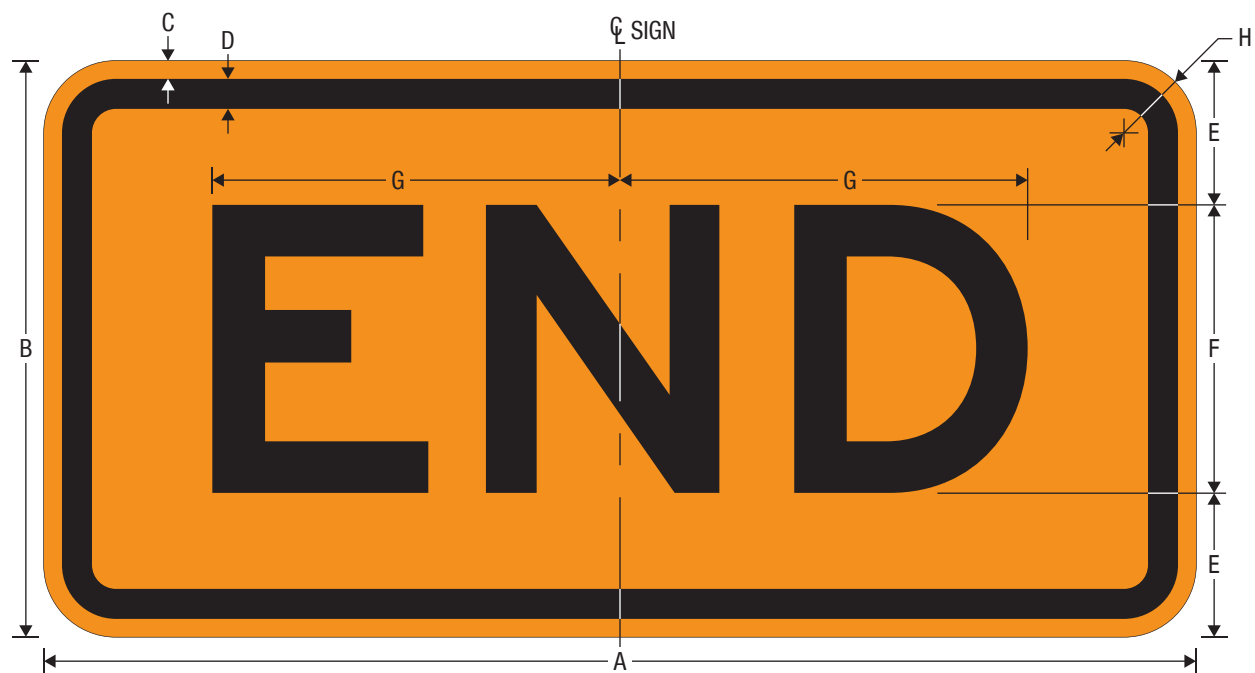

M4-8bP
END (Plaque)

A	B	C	D	E	F	G	H
24	12	0.375	0.438	3	6E	8.493	1.5
30	15	0.375	0.625	3.5	8E	11.168	1.5

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE






M4-8cPT
Street Name (Plaque)

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



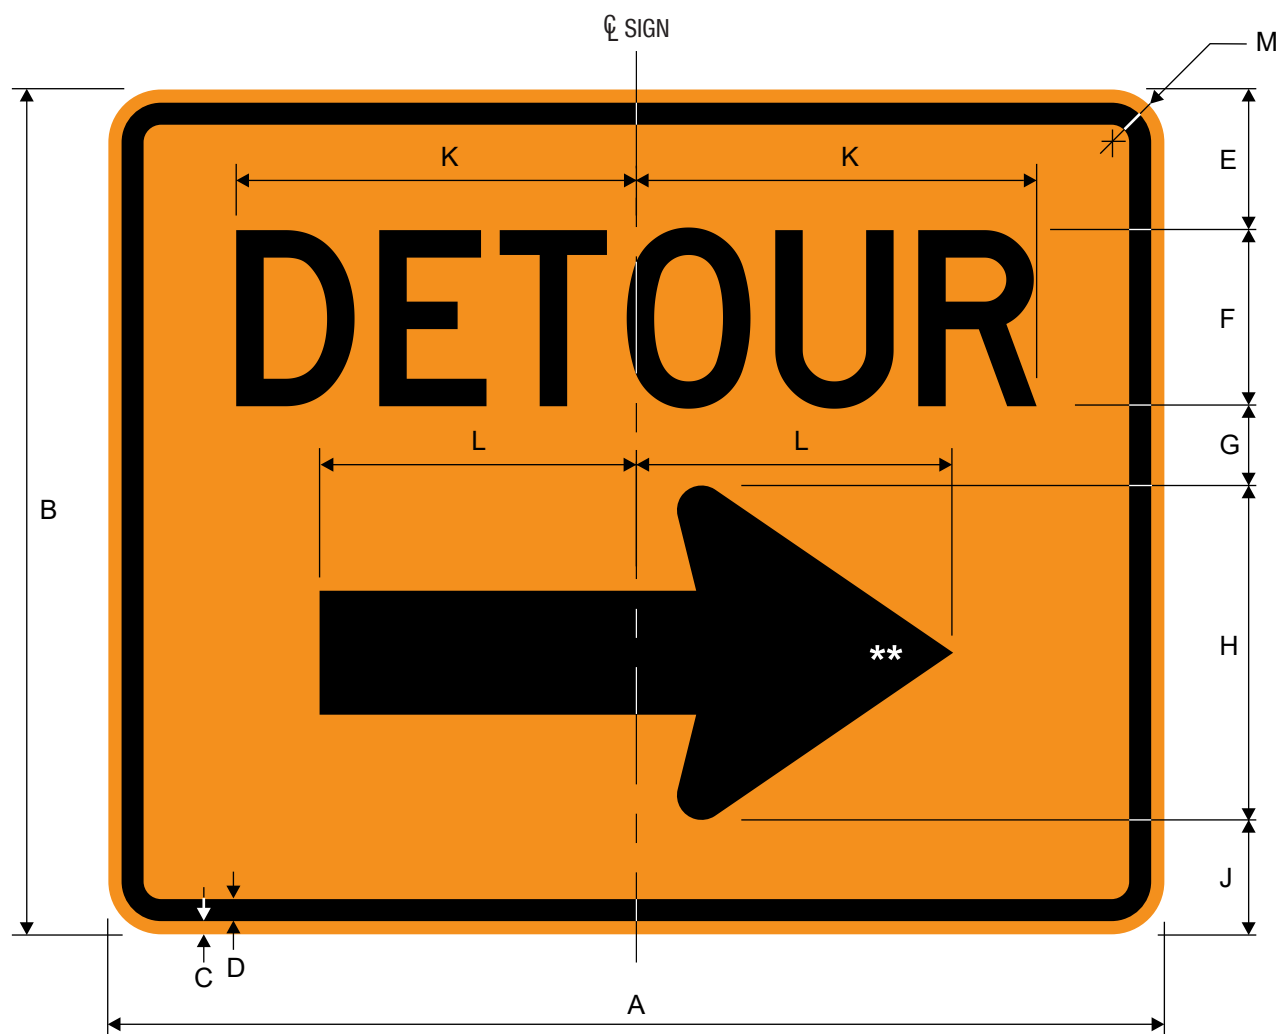

M4-9R
DETOUR (Right-Arrow)




M4-9L
DETOUR (Left-Arrow)

*Reduce spacing 25%.

**See Section 11 for arrow design.

A	B	C	D	E	F	G	H	J	K	L	M
30	24	.375	.625	4	5D*	2.25	9.5	3.25	11.318	9	1.5
48	36	.625	.875	6	8D	3	14.25	4.75	18.109	13.5	2.25
60	48	.75	1.25	8	10D*	4.5	19	6.5	22.735	18	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

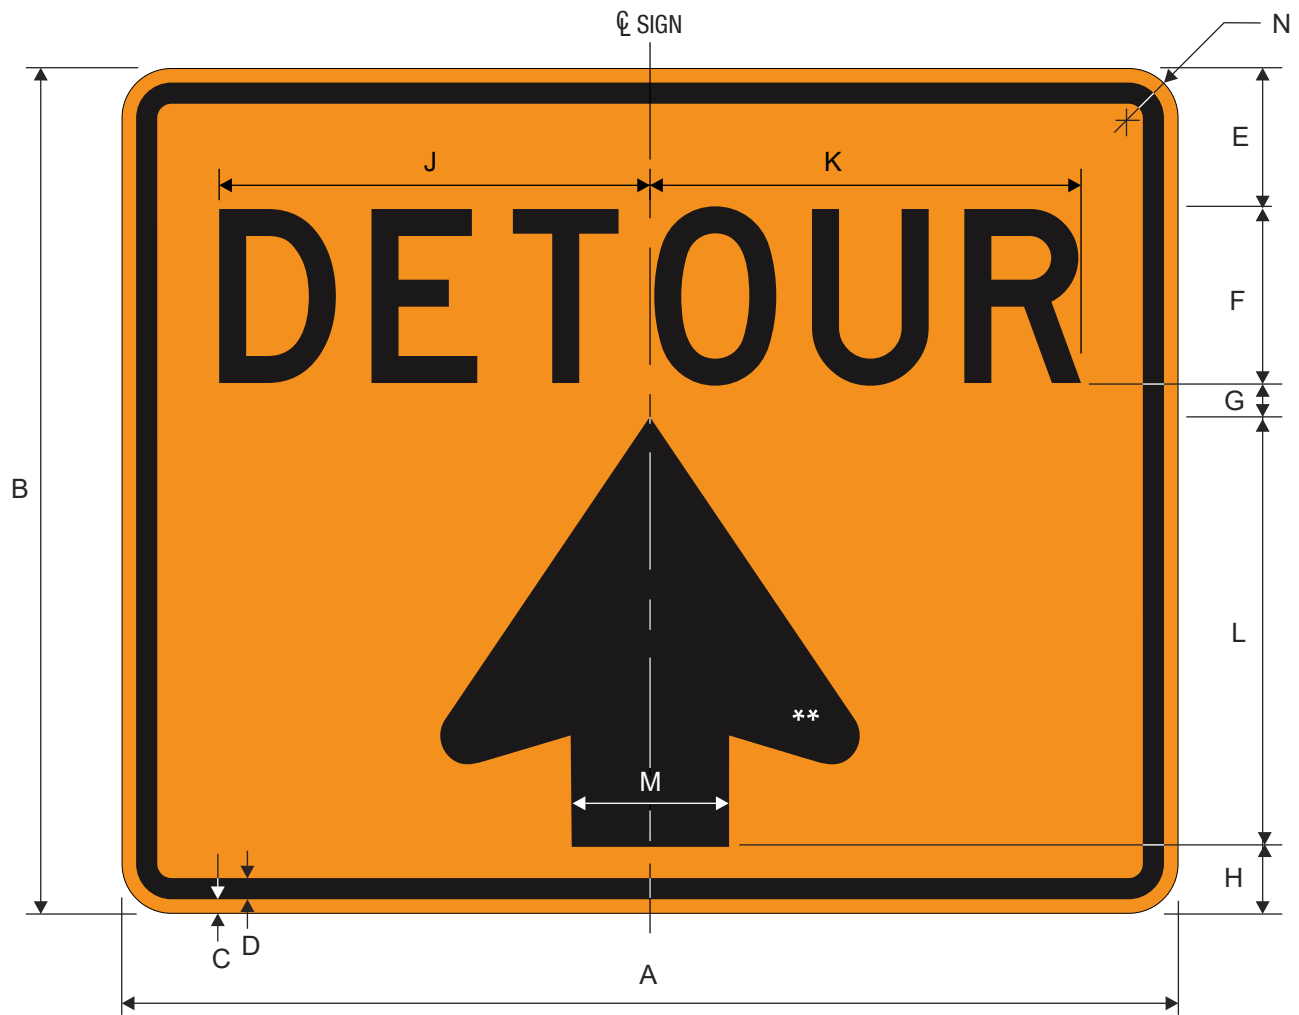

M4-9S
DETOUR (Up-Arrow)


*Reduce spacing 25%.

**See Section 11 for arrow design.

A	B	C	D	E	F	G	H	J	K	L	M	N
30	24	.375	.625	4	5D*	1.8	2.7	11.5	12	10.5	3.5	1.5
48	36	.625	.875	6	8D	1.9	3.35	19.5	20.25	16.75	5.5	2.25
60	48	.75	1.25	8	10D*	3.5	5.5	23	24	21	7	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



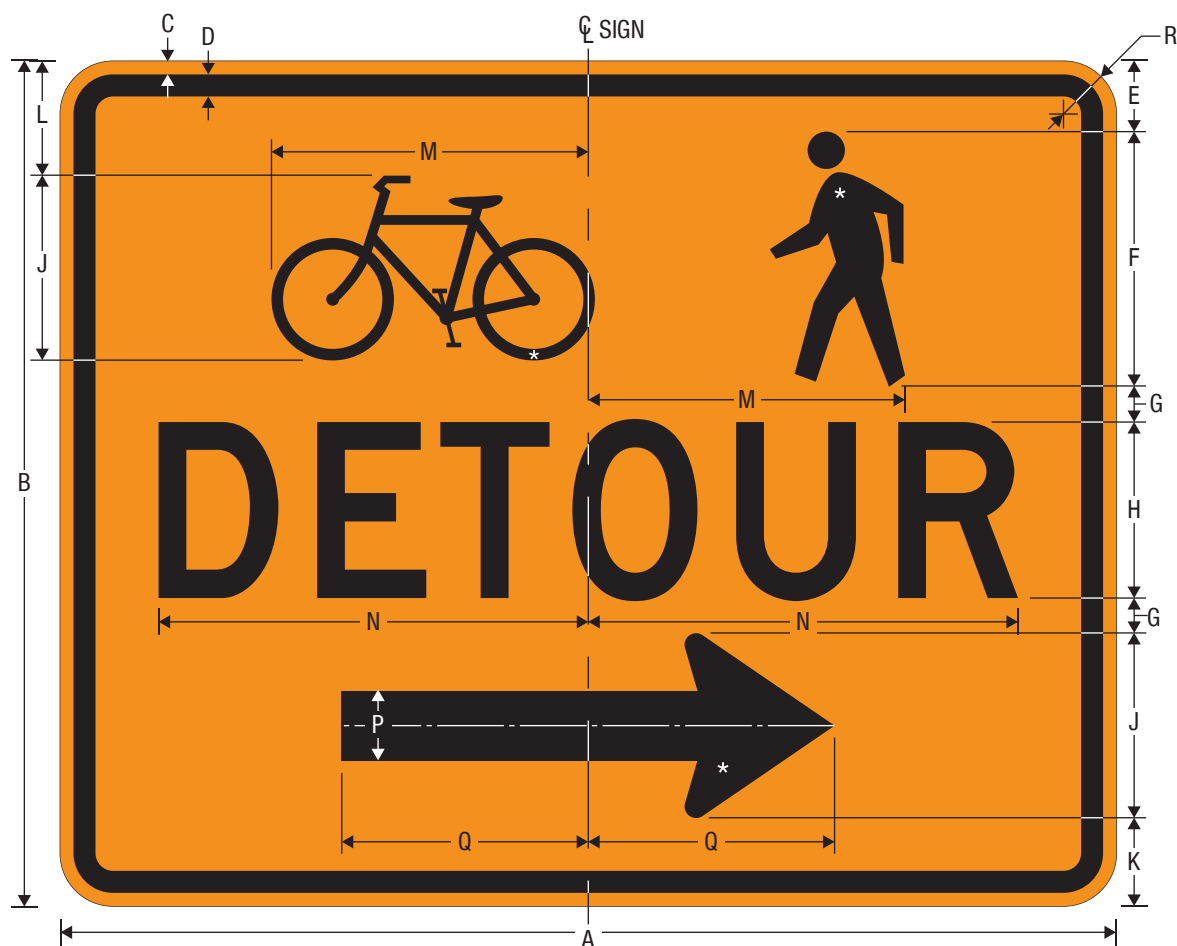

M4-9aR
Bicyclist/Pedestrian DETOUR




M4-9aL

*See Section 11 for symbol and arrow design.

A	B	C	D	E	F	G	H
30	24	0.375	0.625	2	7.25	1	5D

J	K	L	M	N	P	Q	R
5.25	2.5	3.25	9	12.208	1.969	7	1.5

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

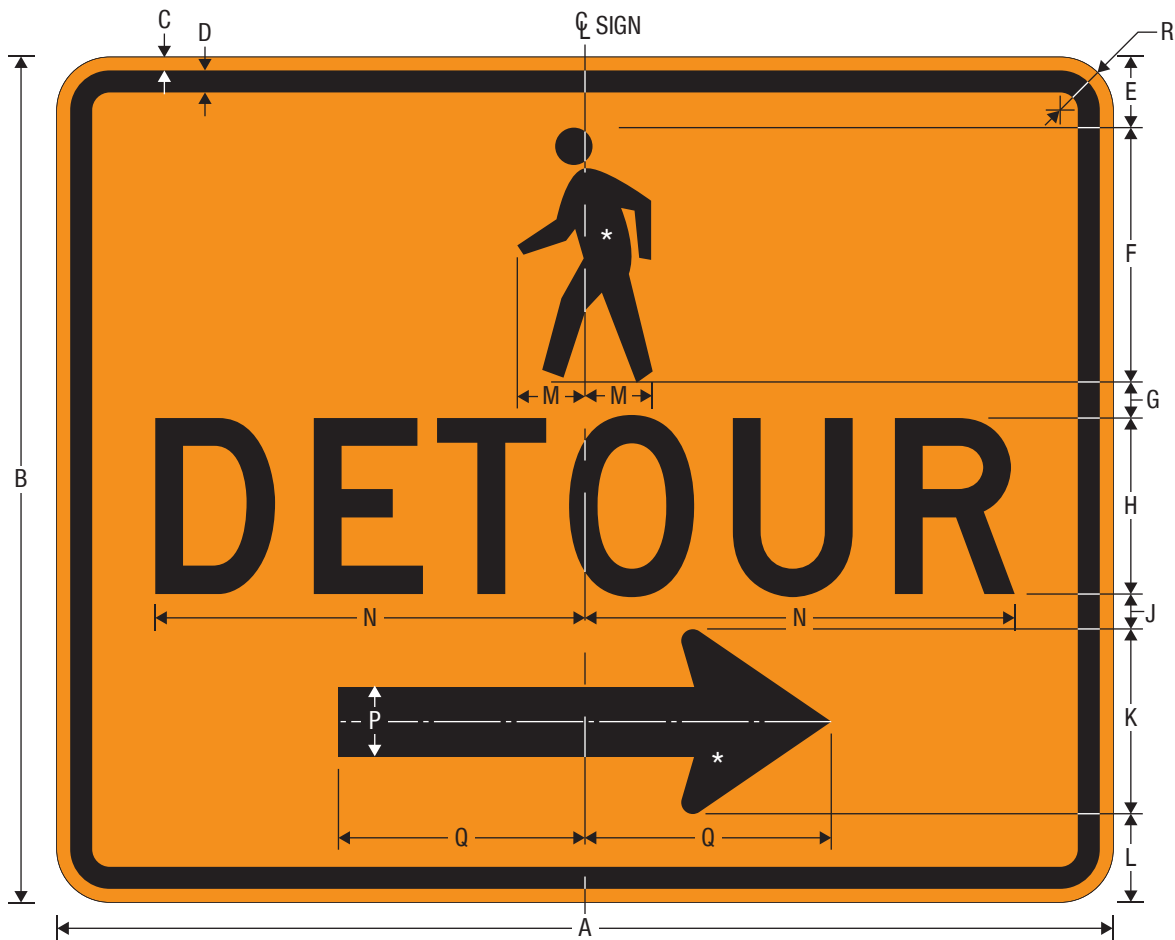

M4-9bR
Pedestrian DETOUR




M4-9bL

*See Section 11 for symbol and arrow design.

A	B	C	D	E	F	G	H
30	24	0.375	0.625	2	7.25	1	5D

J	K	L	M	N	P	Q	R
1	5.25	2.5	1.923	12.208	1.969	7	1.5

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

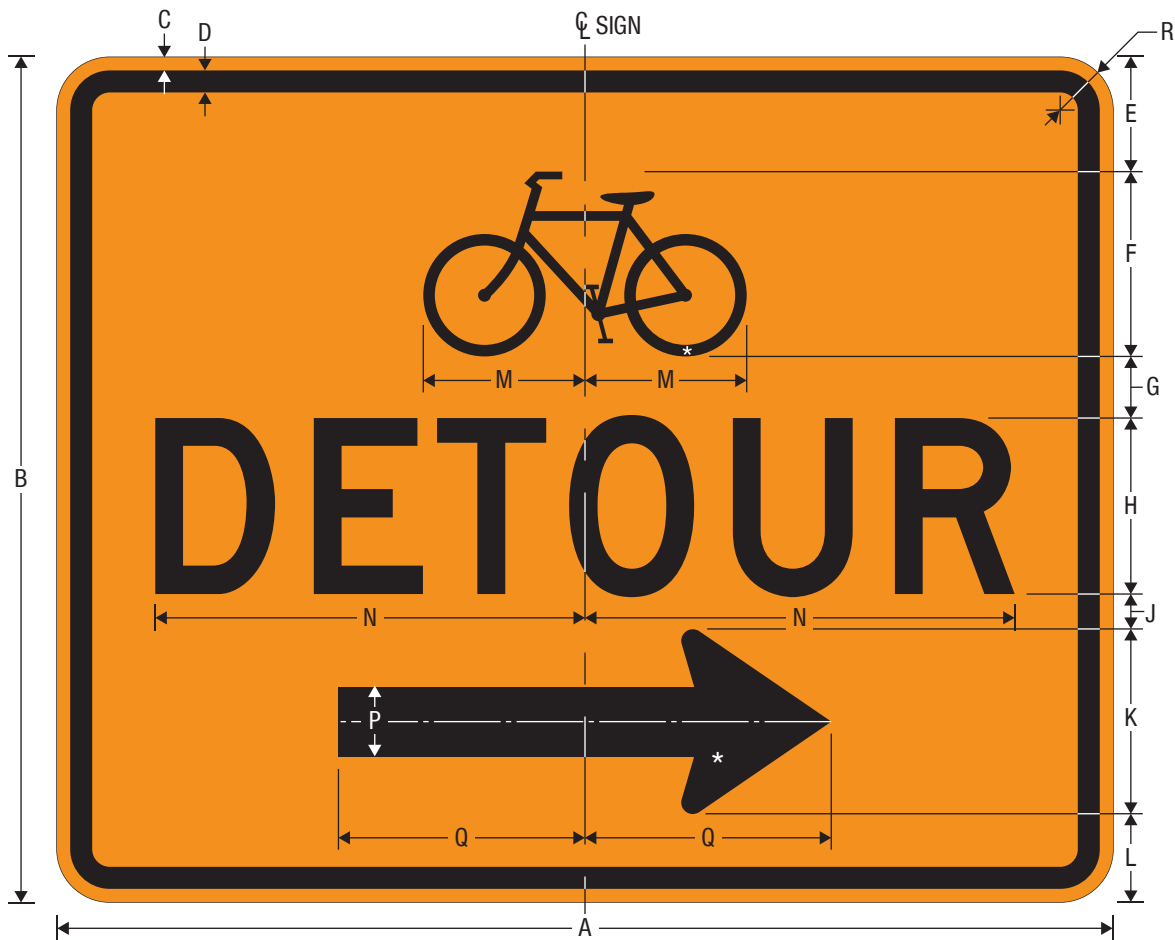

M4-9cR
Bicyclist DETOUR (with Arrow)




M4-9cL

*See Section 11 for symbol and arrow design.

A	B	C	D	E	F	G	H
30	24	0.375	0.625	3.25	5.25	1.75	5D

J	K	L	M	N	P	Q	R
1	5.25	2.5	4.594	12.208	1.969	7	1.5

COLORS: LEGEND, BORDER — BLACK
BACKGROUND — ORANGE

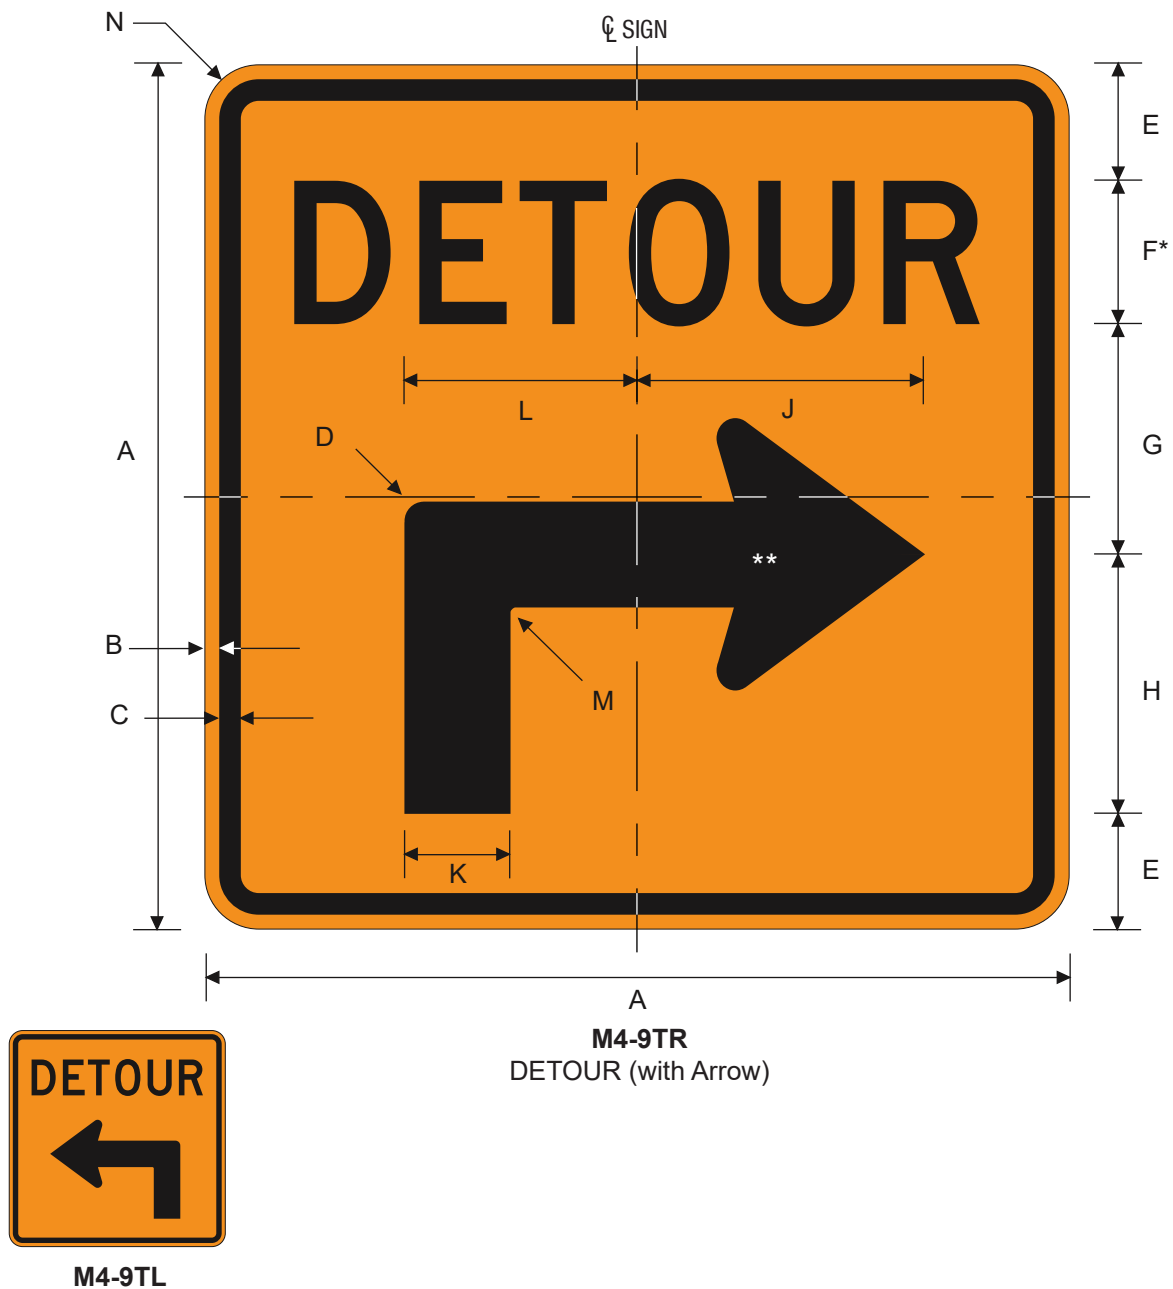


*Reduce spacing 40%.

**See Section 11 for arrow design.


A	B	C	D	E	F	G	H	J	K	L	M	N
30	0.5	0.75	0.5625	4	5D	8	9	10	3.5	8	0.375	1.875
48	0.75	1.25	0.875	6	8D	14	14	16	5.5	12.75	0.625	3

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE



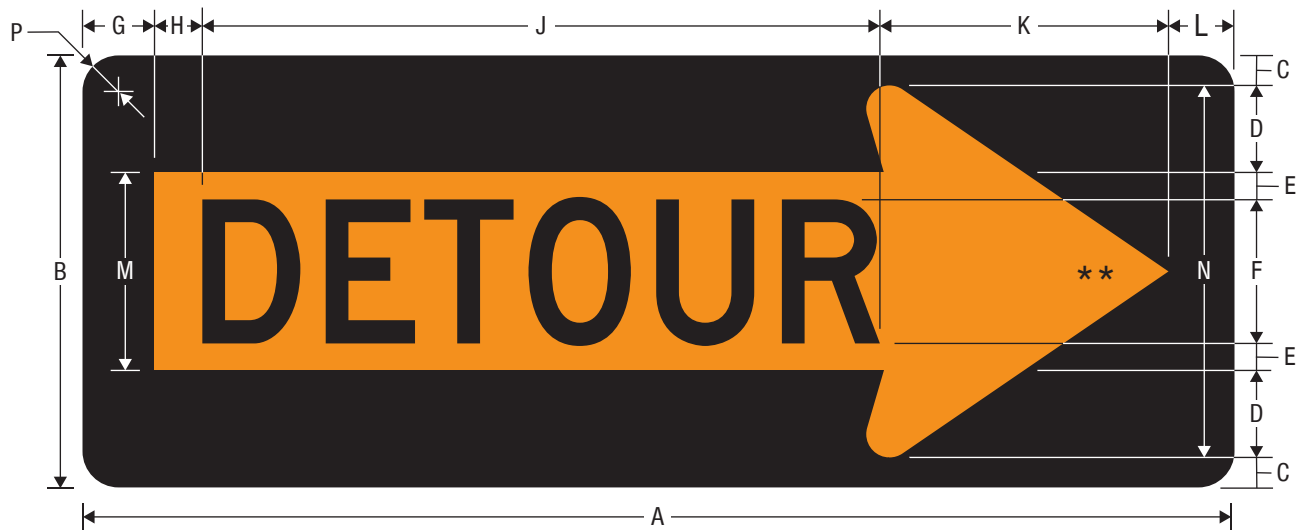

M4-10R
DETOUR (Arrow)

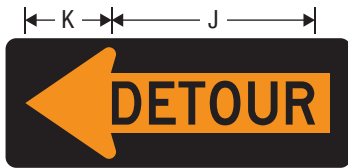


M4-10L

*Reduce spacing 20%.

**See Section 11 for arrow design.

A	B	C	D	E	F	G	H	J	K	L	M	N	P
48	18	1.25	3.625	1.125	6D*	3	1.993	28.232	12.025	2.75	8.25	15.5	1.5


COLORS: LEGEND, BORDER - BLACK
BACKGROUND - ORANGE

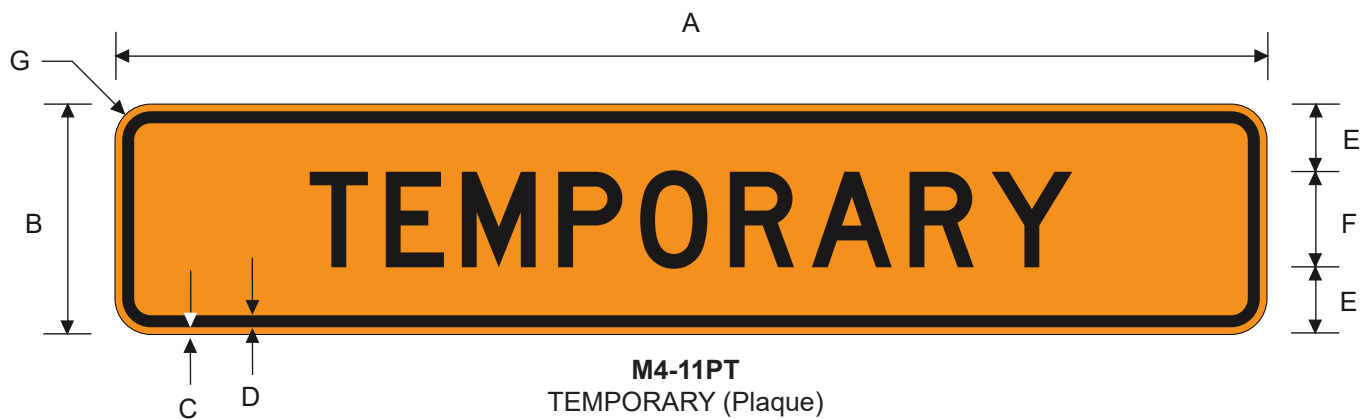


A	B	C	D	E	F	G
60	12	.375	.438	3.5	5D	1.5
72	12	.375	.438	3	6D	1.5

COLORS: LEGEND, BORDER — BLACK
BACKGROUND — ORANGE



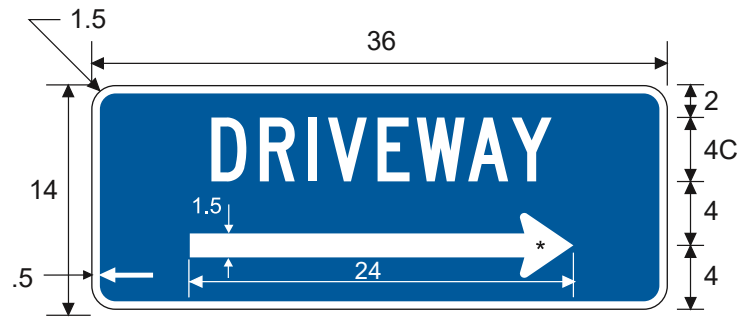

D70
DRIVEWAY (with Arrow) (Blue)

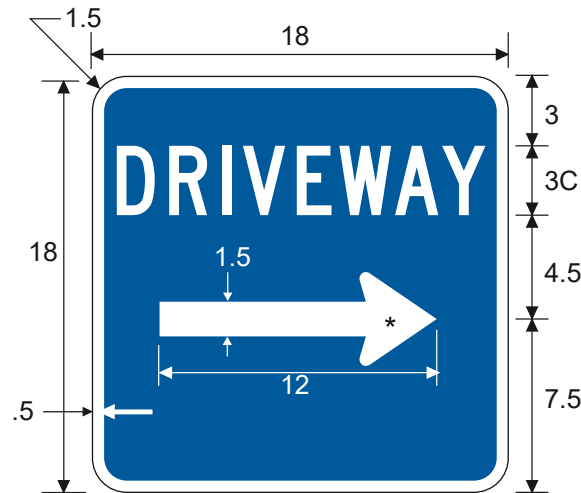

D70a
DRIVEWAY (with Arrow) (Blue)

*See Section 11 for arrow design.



D70S
SHOPPING MALL DRIVEWAY (with Arrow) (Blue)



D70R
RESTAURANT DRIVEWAY
(with Arrow) (Blue)



D70G
GAS DRIVEWAY
(with Arrow) (Blue)




D70B
BUSINESS DRIVEWAY
(with Arrow) (Blue)



D70M
MOTEL DRIVEWAY
(with Arrow) (Blue)

COLORS: LEGEND, BORDER - WHITE
BACKGROUND - BLUE



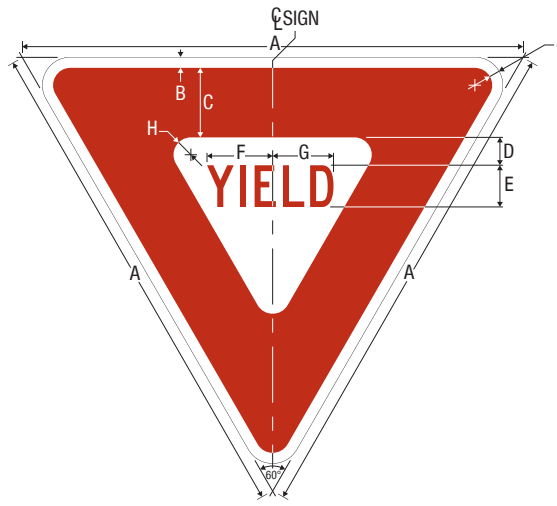


R1-2
YIELD



A	B	C	D	E	F	G	H	J
18	0.375	2	1	1.5C	2.372	2.175	0.625	1.5
30	0.625	4	1.75	2.5C	3.953	3.625	0.875	1.5
36	0.75	5	2	3C	4.718	4.375	1.25	2
42	0.875	5.5	2.375	3.5C	5.302	5.302	1.625	2.25
48	1	6	2.75	4C	6.249	5.875	2	3
60	1.5	8	3.5	5C	7.905	7.25	2.5	4


COLORS: LEGEND, OUTER BACKGROUND - RED
INNER BACKGROUND, BORDER - WHITE

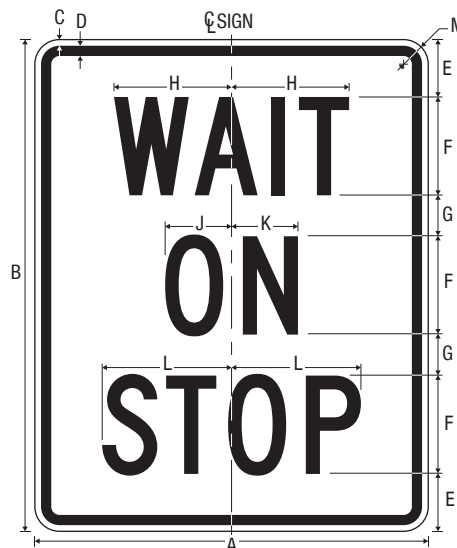

R1-7
WAIT ON STOP

A	B	C	D	E	F	G	H	J	K	L	M
24	30	0.375	0.625	3.5	6C	2.5	7.173	4.052	4.051	7.893	1.5

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - WHITE

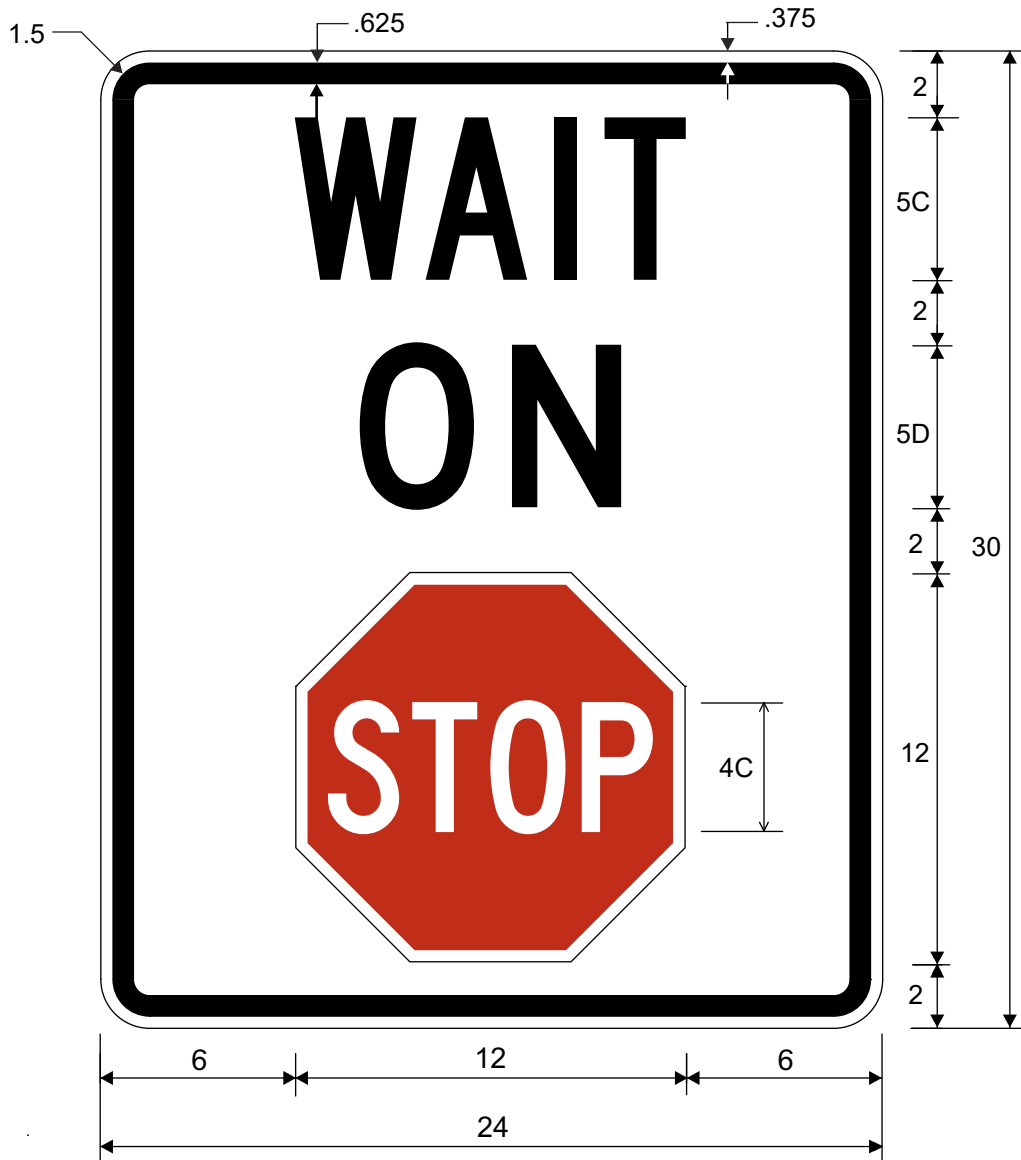

R1-7aT
WAIT ON Stop

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - WHITE



COLORS: LEGEND, BORDER - WHITE
BACKGROUND - RED





R1-8
GO ON SLOW

A	B	C	D	E	F	G	H	J	K	L	M	N
24	30	0.375	0.625	3.5	6C	2.5	3.992	3.991	4.052	4.051	8.494	1.5

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - WHITE




R20-3T
STATE LAW OBEY WARNING SIGNS

COLORS:

TOP PANEL: LEGEND, BORDER - BLACK
BACKGROUND - YELLOW

BOTTOM PANEL: LEGEND, BORDER - BLACK
BACKGROUND - WHITE



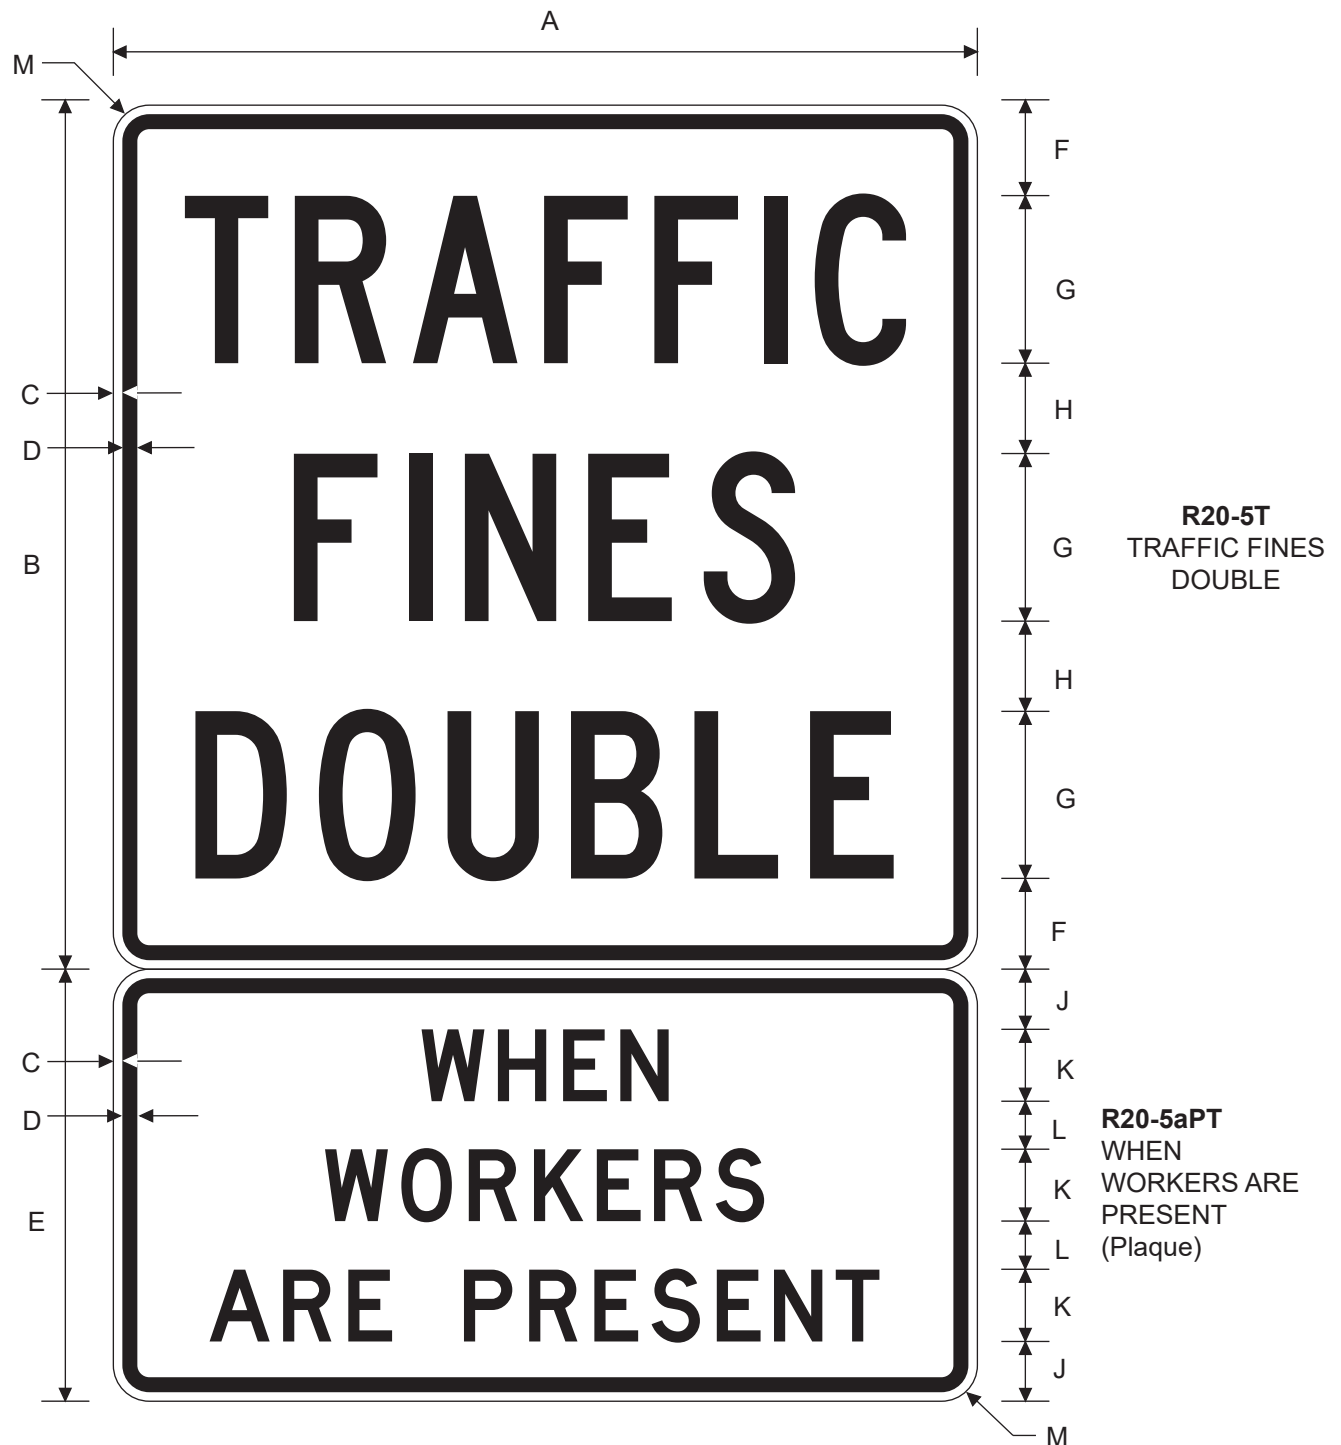

A	B	C	D	E	F	G	H	J	K	L	M
24	30	.375	.625	12	4.5	5C	3	1.75	2D	1.25	1.5
36	36	.375	.625	18	3.75	7C	3.75	2.5	3D	2	1.5

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - WHITE





R22-2
TURN OFF 2-WAY RADIO AND CELL PHONE

COLORS: LEGEND, BORDER - BLACK
BACKGROUND - WHITE

(This page left intentionally blank)